

**CERTIFICATE**

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

**CERTIFIED LAND CORNER**

History of corner established since Original Government Survey

Bryan Meyer set this corner on line and equidistant between the northeast and southeast corners of Section 21.

No. 21703212000



**Description of evidence found**

On September 11th, 2012, Anderson Engineering of Minnesota located the Harrison monument with the top broken off. The monument is 12+/- feet west of a sandy two track trail.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 376439.45  
Easting (X) 647722.27

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

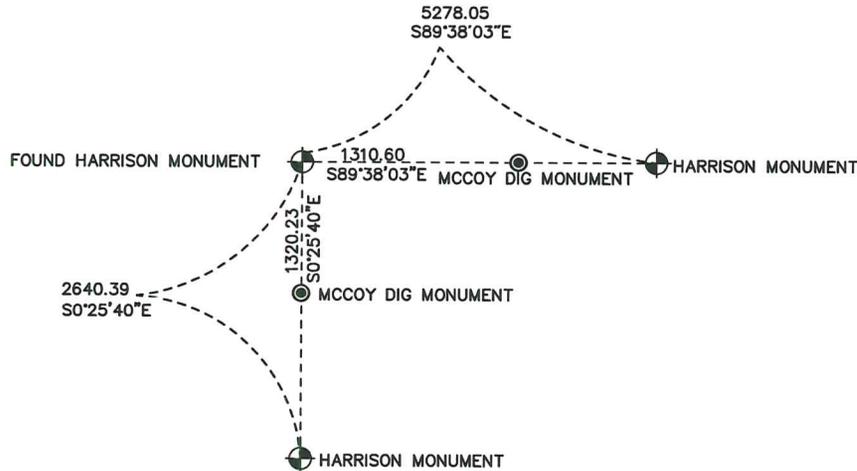

⊕ = LOCATION CORNER  
Corner I.D. E 1/4 21  
T 17 N R 3 W  
Town of Angelo  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

21703212000

I, Bryan H. Meyer, do hereby certify that on the 10<sup>th</sup> day of July 19 87, I found ~~no evidence~~ (no evidence) of the West 1/4 corner of Section 22, T 17 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 15<sup>th</sup> day of July 1987.

Bryan H. Meyer


Registered Land Surveyor  
Title

History of corner establishment since Original Government Survey

No recorded history.

Description of corner evidence found:

I set this corner on line and equidistant between the Northwest and Southwest corners of Section 22.

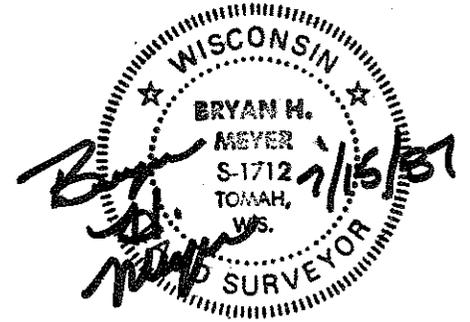

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Crew: Meyer, Kenworthy, Wilhite  
Date: July 10, 1987 - 1:30 P. M.  
Weather: Humid, Humid, Hot!

Witnesses to corner location:


Bryan Meyer

John "Rory" Kenworthy

Dallas Wilhite

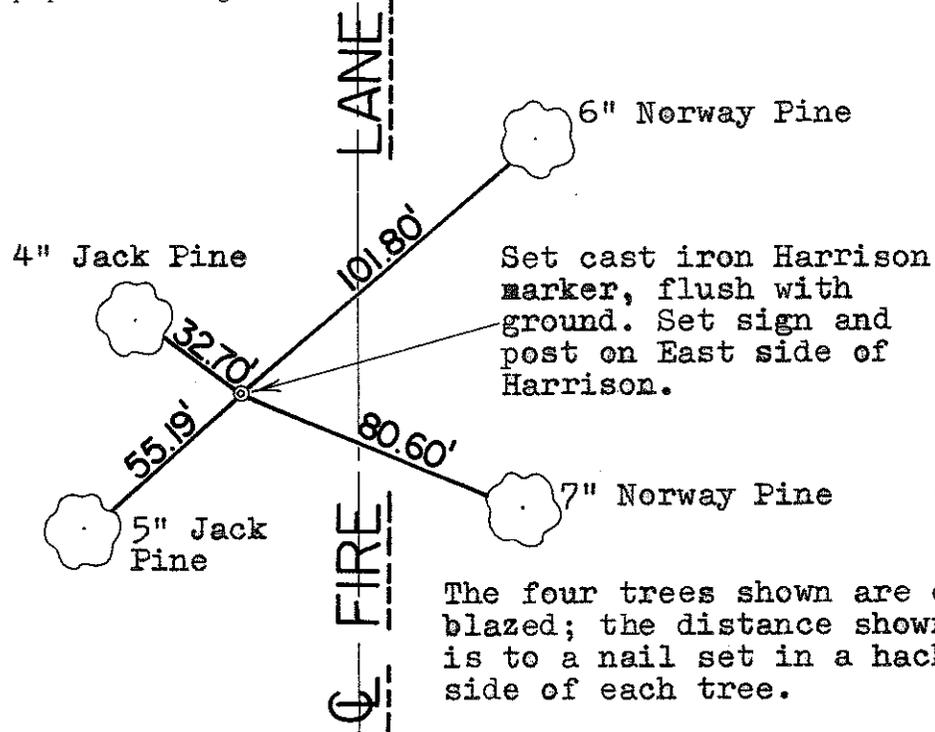

The four trees shown are double blazed; the distance shown to each is to a nail set in a hack in the side of each tree.

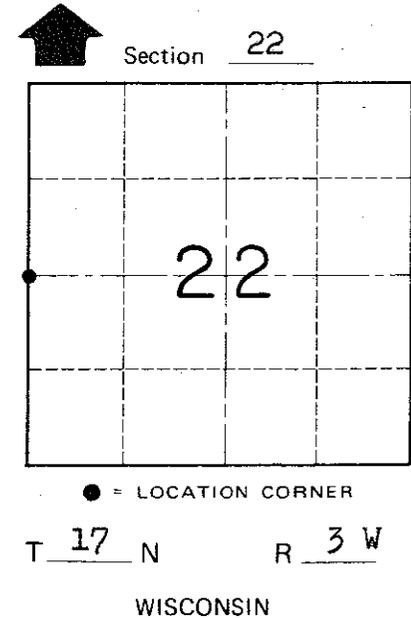

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town of Angelo  
County of Monroe