

**CERTIFICATE**

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

**CERTIFIED LAND CORNER**

History of corner established since Original Government Survey

In 1981 Harley Sime set a Harrison monument on line and proportionally to the original notes between the South Quarter of Section 22 and the southeast corner of Section 23.

Description of evidence found

On March 12th, 2013, Anderson Engineering of Minnesota located the Harrison monument in a mound with pits to the north, south, east, and west. The monument is 0.3 feet north of a witness post with a survey marker sign.

No. 21703220000



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 373766.36  
Easting (X) 652973.11

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

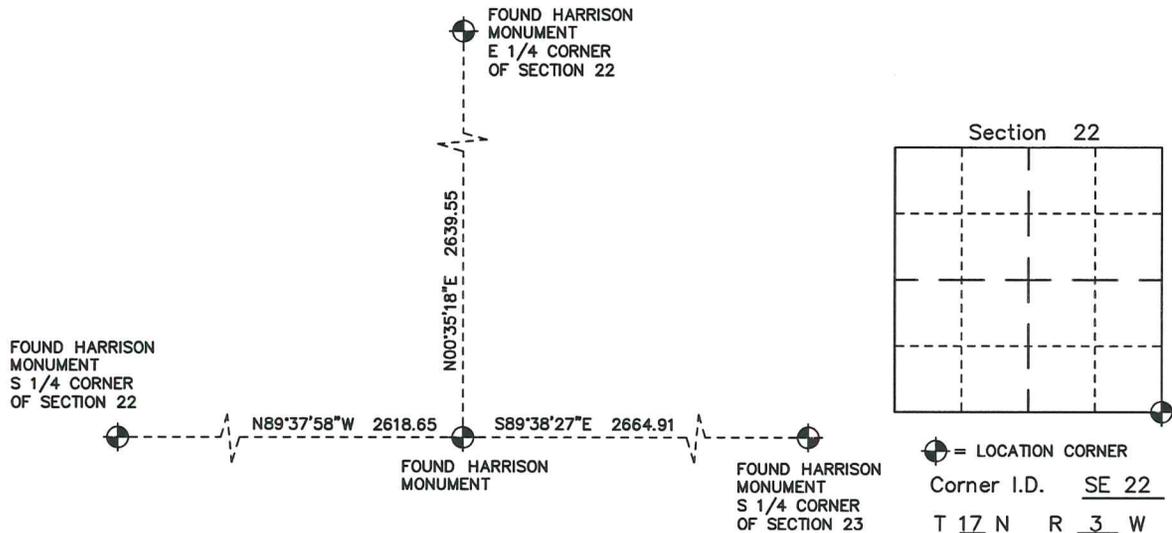

= LOCATION CORNER  
Corner I.D. SE 22  
T 17 N R 3 W  
Town of Angelo  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

CERTIFICATE

CERTIFIED LAND CORNER

No. 85

**21703220000**

I, Harley A. Sime, do hereby certify that on the 29th day of April 19 81, I found ~~(evidence)~~ (no evidence) of the SW corner of Section 23, T 17 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of corner establishment since Original Government Survey

Hamilton LaRue was here in May of 1897.

Dated this 2nd day of July 19 81.

Description of corner evidence found:

Set on line and proportionately to the original notes between the S $\frac{1}{4}$  corner of Section 22 and the SE corner of Section 23.

Harley A. Sime, R.L.S. 355

County Surveyor  
Title

COUNTY SURVEYOR FORM NO. 1


Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner.

Witnesses to corner location:


G. Dechant

B. Meyer

G. Sime

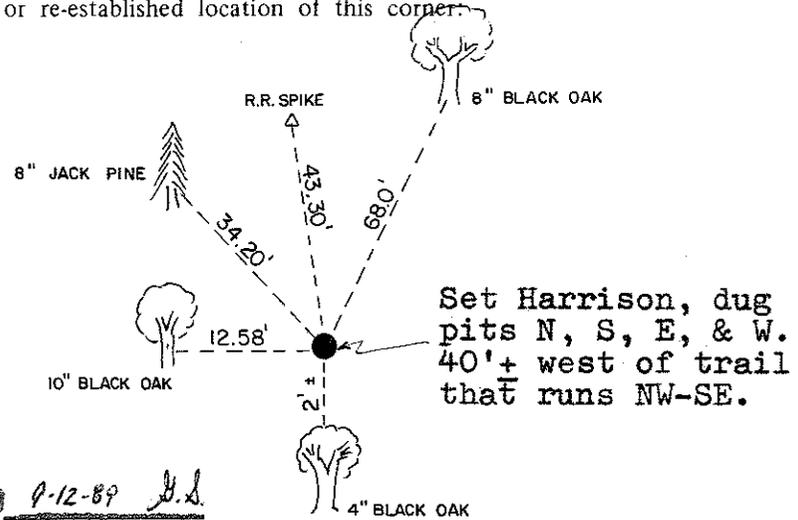

SIGN PLACED 9-12-89 H.A.S.

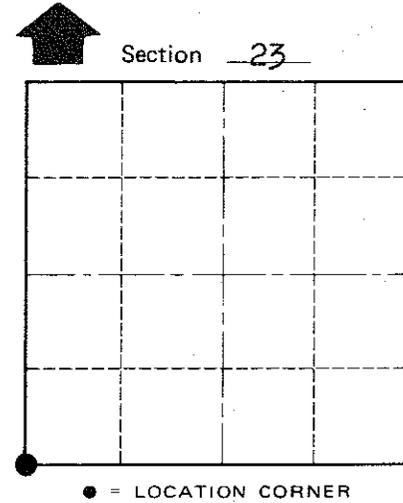

T 17 N R 3 W  
WISCONSIN

**Approved: HARLEY A. SIME  
MONROE CO. SURVEYOR**

(All trees are double blazed with R.R. Spikes set)

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City/Village~~ Town Angelo  
County of Monroe