


CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013

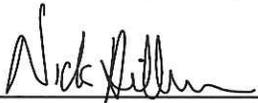

Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER


History of corner established since Original Government Survey

In April of 2011 Laurence Johns III set a Harrison monument equidistant between the northeast and southeast corners of Section 28 and on the east edge of the excavation fire break.

Description of evidence found

On September 11th, 2012, Anderson Engineering of Minnesota located the Harrison monument 0.3 feet above grade and 0.5 feet west of a metal fence post with survey marker sign.

No. 21703282000

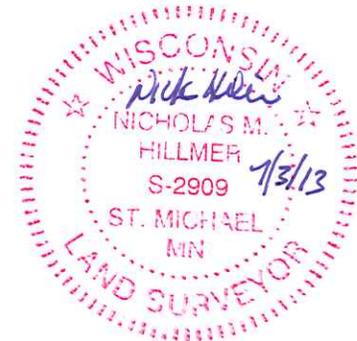

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:



Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 371171.00
Easting (X) 647762.00

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

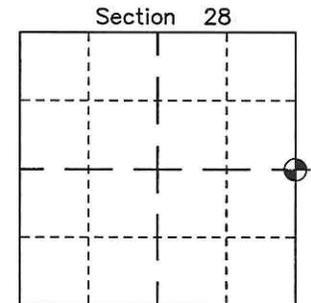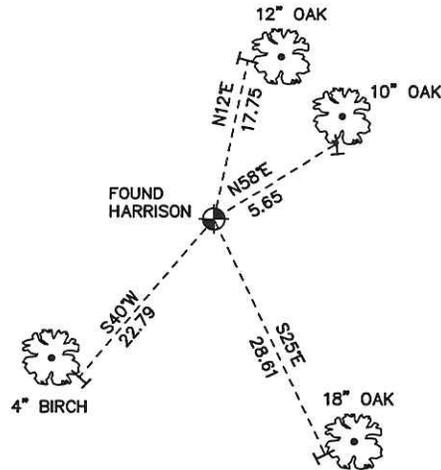

⊙ = LOCATION CORNER
Corner I.D. E 1/4 28
T 17 N R 3 W
Town of Angelo
Monroe County, WI.

CERTIFICATE

I, Laurence E Johns III, do hereby certify that on the 30th day of April 2011, I found evidence of the South 1/4 Corner of Section 27, T17N, R3W, Fourth Principle Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 30th day of April, 2011.

Laurence E. Johns III
 Laurence E Johns III RLS 2804
 Eagle Ridge Surveying, LLC
 PO Box 213
 Wilton, WI 54670

CERTIFIED LAND CORNER

History of corner establishment since Original Government Survey


John Dunn established this corner in October 1846.

Description of corner evidence found:


The only occupation in the area is the Fire Break put in by Fort McCoy many years ago. There is a single strand of galvanized fence wire heading to the East about 30 feet South of this location. But that is a new fence and does not run in the right direction. I did not accept it as credible evidence.

I set the corner at equi-distant between the NW & SW Corners and on the East edge of the excavation of the Fire Break.

No. 97
 21703282000

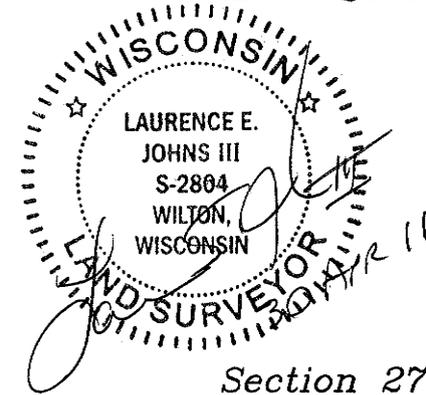

Section 27

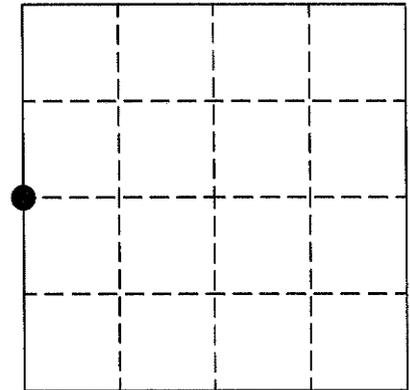

● = LOCATION CORNER

T17N R3W
 WISCONSIN

See Section Information on Reverse

COUNTY SURVEYOR FORM NO. 1


Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witness to corner location:

 Laurence E Johns III

 Larry Handschy

Fort McCoy Reservation

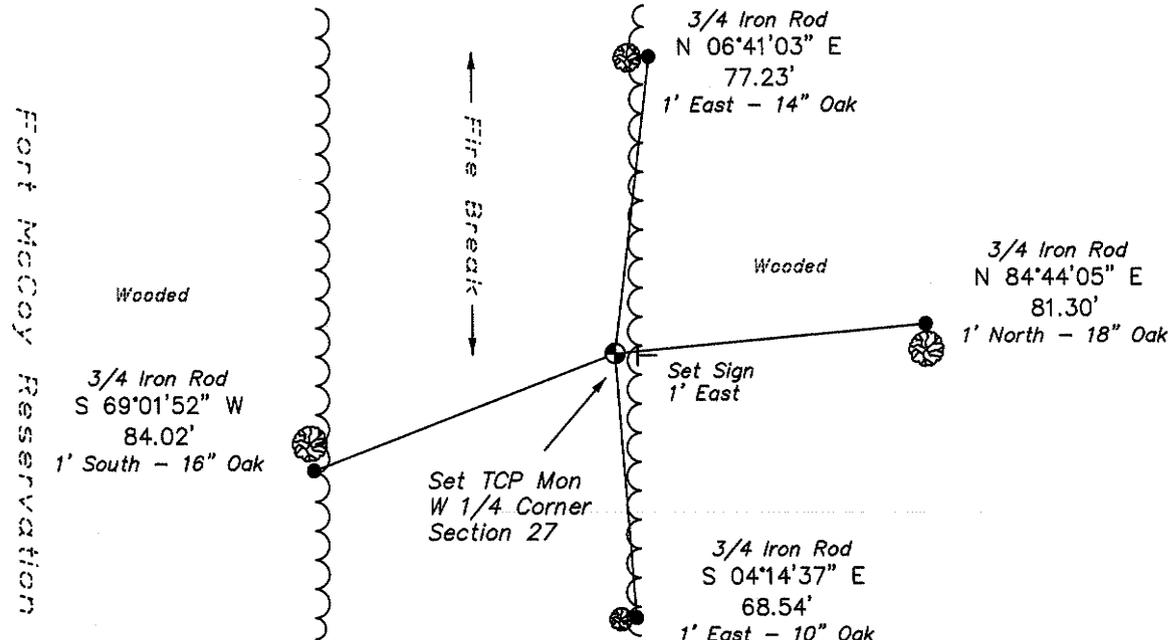

SURVEY CONTROL ORDER

Horizontal
Vertical

MONROE COUNTY COORDINATE SYSTEM - NAD 1983 (2007)

	East (X) North G.S.	North (Y) East G.S.	Elevation (Z)	Zone
W 1/4 Corner	371171.087	647761.931		
Control Sta. Name				

City, Village or Town Angelo

County of Monroe

