


CERTIFICATE

CERTIFIED LAND CORNER

No. 111

2170330000

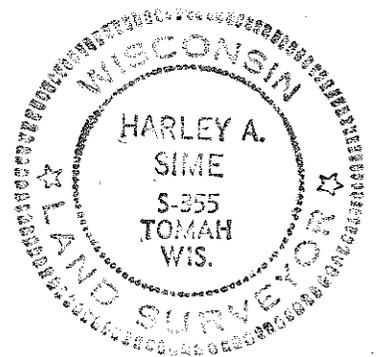

I, William C. Jung, do hereby certify that on the 22nd day of July 1977, I found (evidence) ~~(no evidence)~~ of the S.W. corner of Section 29, T 17 N, R 3 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 30th day of January 1978.

W.C.Jung, R.L.S.1323

Crew Chief, County Surveyor's  
Title Office

History of original corner establishment:

Fred Holden in his notes of April, 1902, shows an iron rod at this corner, and an iron rod and stone here in his notes of January, 1905.

Description of corner evidence found:

Found a stone with a bent iron rod beside it, down 19". It lies pretty much in the road intersection and is southwest of the bike trail. Buried 4 cans with R.R. spikes in them on top of the stone.


Corner update: 5/22/81 Crew: Meyer, Dechant, and Pietz  
The stone was found again. Additional ties were taken.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Found a stone in the road.

Witnesses to corner location:

W. Jung  
G. Dechant  
B. Rasmussen

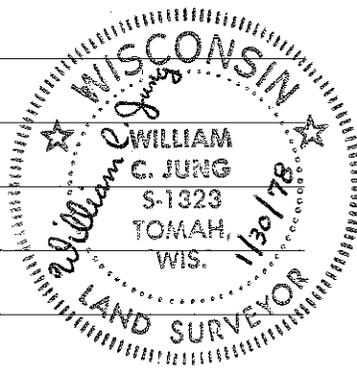

Approved: Harley Sime  
County Surveyor

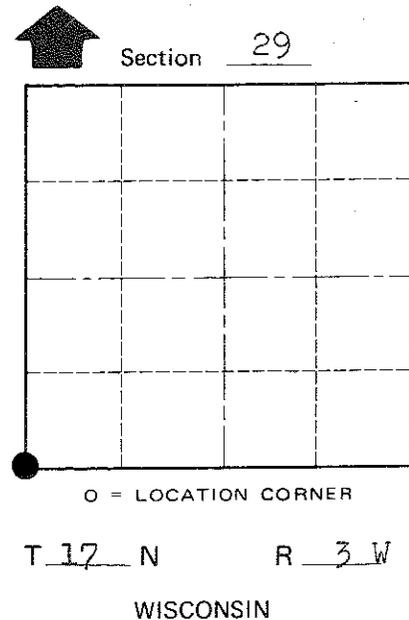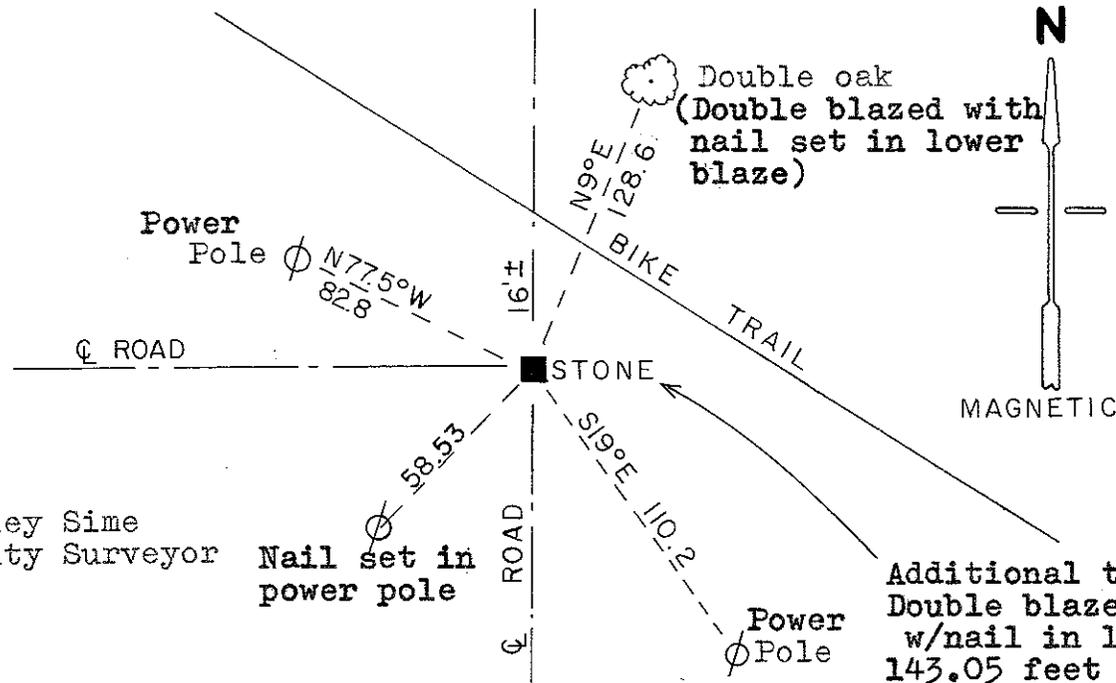

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

Additional tie:  
Double blazed 10" white pine w/nail in lower blaze located 143.05 feet Southeast of corner

City, Village or Town Angelo  
County of Monroe