


CERTIFICATE

UPDATED
CERTIFIED LAND CORNER

No. 75

PAGE 2

21704192000

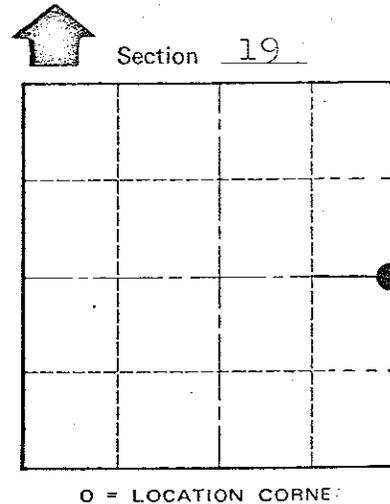

I, Harley A. Sime, do hereby certify that on the 10 day of July 19 75, I found ~~(evidence)~~ (no evidence) of the E 1/4 corner of Section 19, T 17 N, R 4 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of original corner establishment:

O. R. Dahl was at this corner in May of 1868. This corner has been used by numerous surveyors in their surveys in Sections 19 & 20.

Description of corner evidence found:

Set the corner proportionately between the section corners.

Dated this 22 day of Jan. 1976.

Harley A. Sime
County Surveyor
Title




Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set a Harrison marker, up 6", 1 ft. East of edge of top of bank.

All trees were blazed and the 5" Hickory & the 10 W. Oak have a nail set in a hack in the side of the tree.

Witnesses to corner location:

W.C. Jung - Crew Chief W.C. Jung
D. Dade
G. Dechant

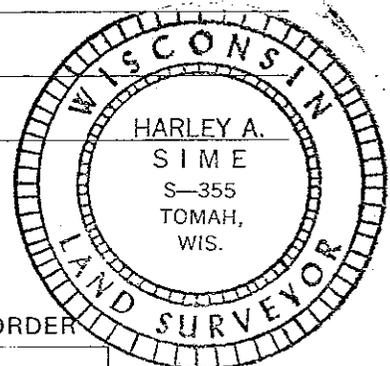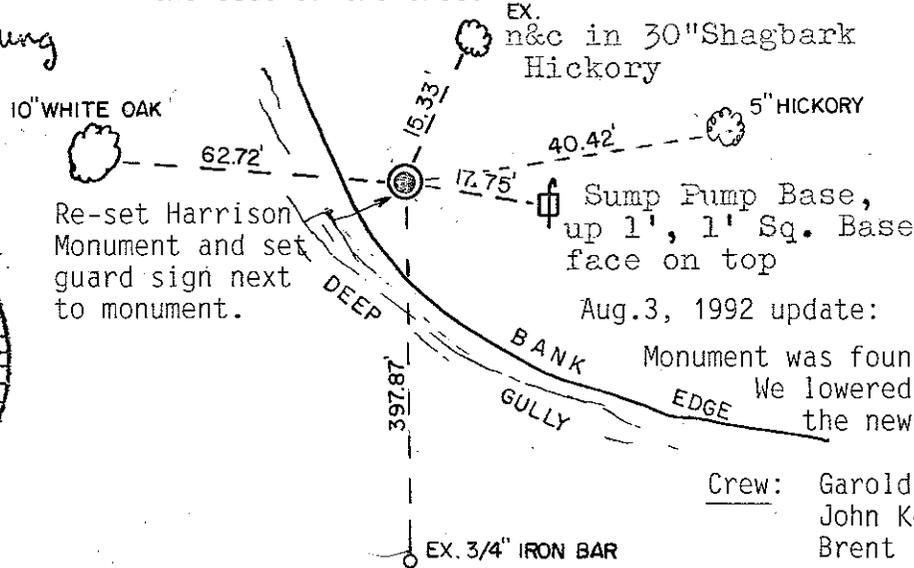

Aug. 3, 1992 update:
Monument was found leaning westerly. We lowered monument and established the new ties as shown hereon.

Crew: Garold A. Sime, R.L.S. (Monroe Co. Surveyor)
John Kenworthy
Brent Kostka

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Sparta
County of Monroe

COUNTY SURVEYOR FORM NO. 1

CERTIFICATE

CERTIFIED LAND CORNER

No. 75

See New Sheet

I, Harley A. Sime, do hereby certify that on the 10 day of July 19 75, I found ~~(evidence)~~ (no evidence) of the E 1/4 corner of Section 19, T 17 N, R 4W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.


History of original corner establishment:

Description of corner evidence found:

Dated this 22 day of Jan. 1976.

Set the corner proportionately between the section corners.

Harley A. Sime
County Surveyor
Title

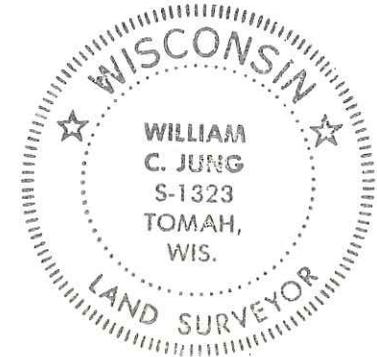





COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set a Harrison marker, up 6", 1 ft. East of edge of top of bank. All trees were blazed

Witnesses to corner location:

W.C. Jung - Crew Chief *W.C. Jung*
D. Dade
G. Dechant

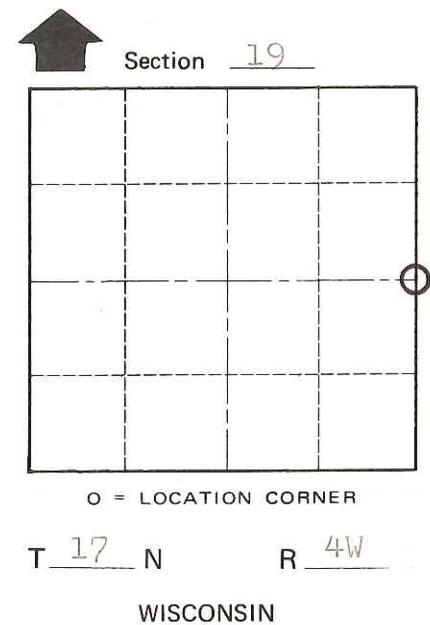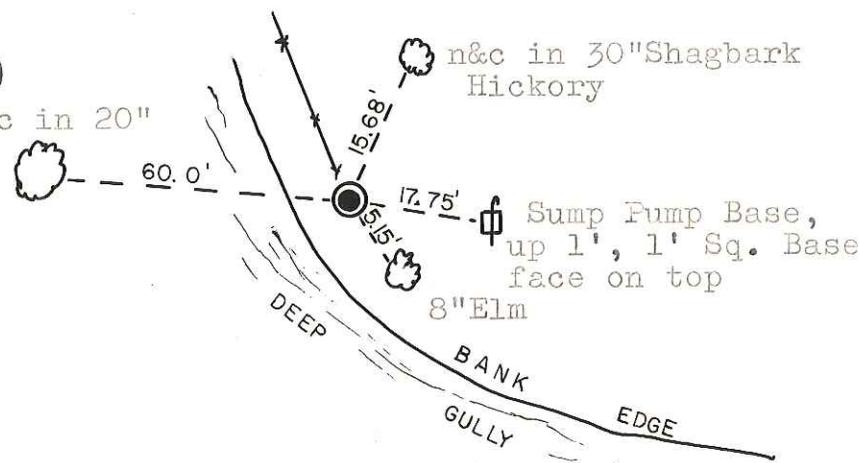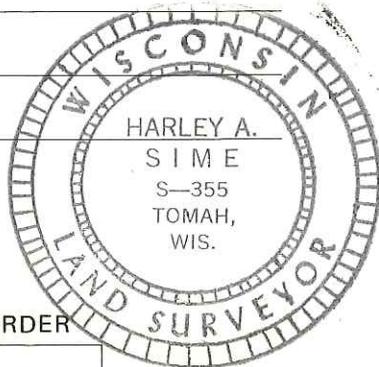

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Sparta

County of Monroe