

CERTIFICATE

CERTIFIED LAND CORNER

No. 83

Pg. 3

21704230000

I, Garold A. Sime, do hereby certify that on the 21st day of August 1986, I found (evidence) ~~(no evidence)~~ of the NW corner of Sec. 25, T 17 N, R 4W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 29th day of Dec 19 86.

Garold A. Sime

Deputy County Surveyor
Title

History of corner establishment since Original Government Survey

*See previous land corner record

Description of corner evidence found:

Found existing harrison monument down 5" and referenced same

COUNTY SURVEYOR FORM NO. 1




Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Garold A. Sime, R.L.S.

Dallas Wilhite

Joel Tralmer

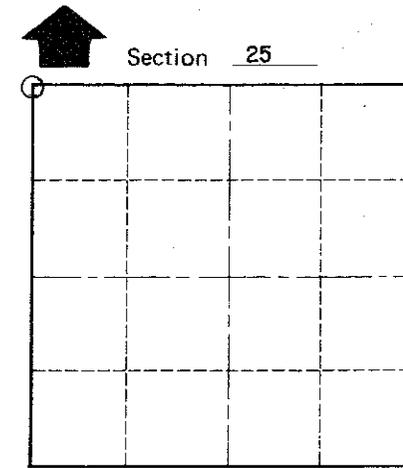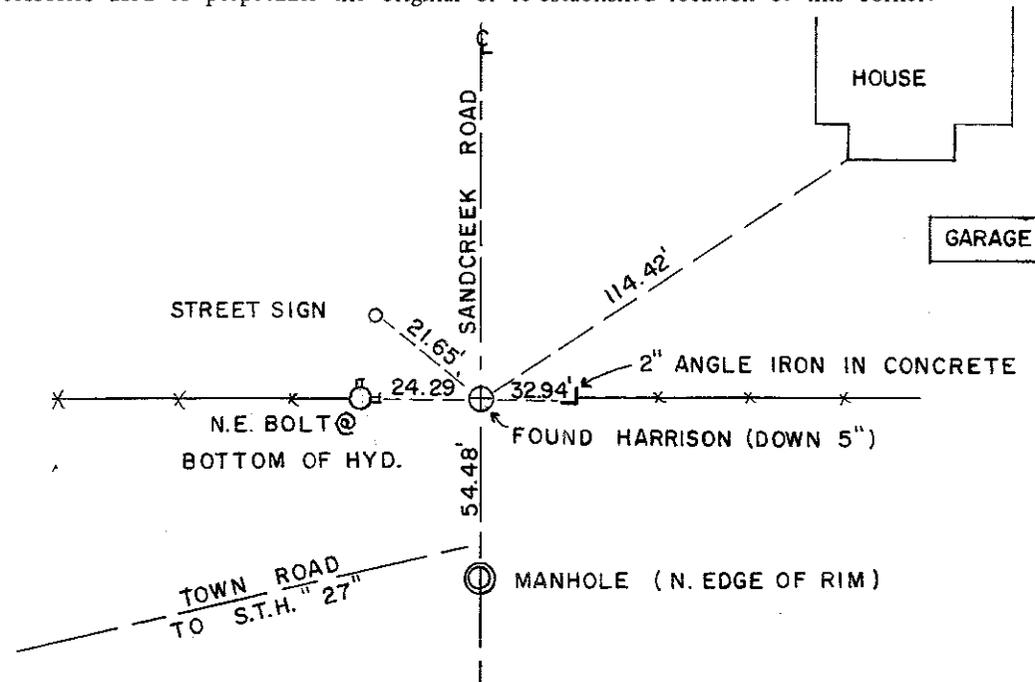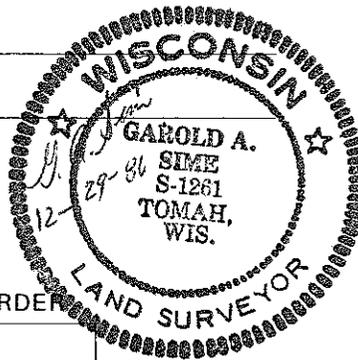

O = LOCATION CORNER

T 17 N R 4W

WISCONSIN

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Sparta

County of Monroe

I, William C. Jung, do hereby certify that on the 6th day of July 1981, I found (evidence); (~~no evidence~~) of the SW corner of Section 24, T17 N, R 4 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 8th day of July 1981.

William C. Jung, R.L.S. 1323

County Surveyor's Office
Title

History of corner establishment since Original Government Survey

Fred Holden set a stake in the center of the highway on the 15th of August 1902.
Fred Zietlow replaced an existing R.R. spike with a 3/4"x24" round iron bar on May 27, 1969.
Douglas Malliet replaced an existing round iron bar with a Harrison monument on July 24, 1975.



Description of corner evidence found:

The Harrison monument set by D. Malliet was destroyed due to road construction. We reset the corner from Malliet's old ties and some new ties were also taken. Greg Hofmeister used this corner in his Plat of Hoeschler's Greendale Manor in June of 1980.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

W. Jung *William C. Jung*
C. Pietz

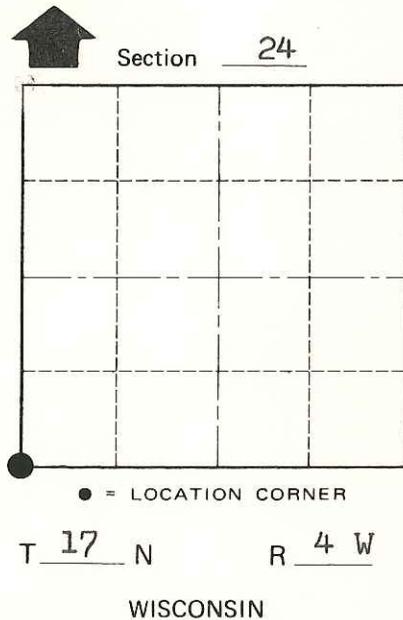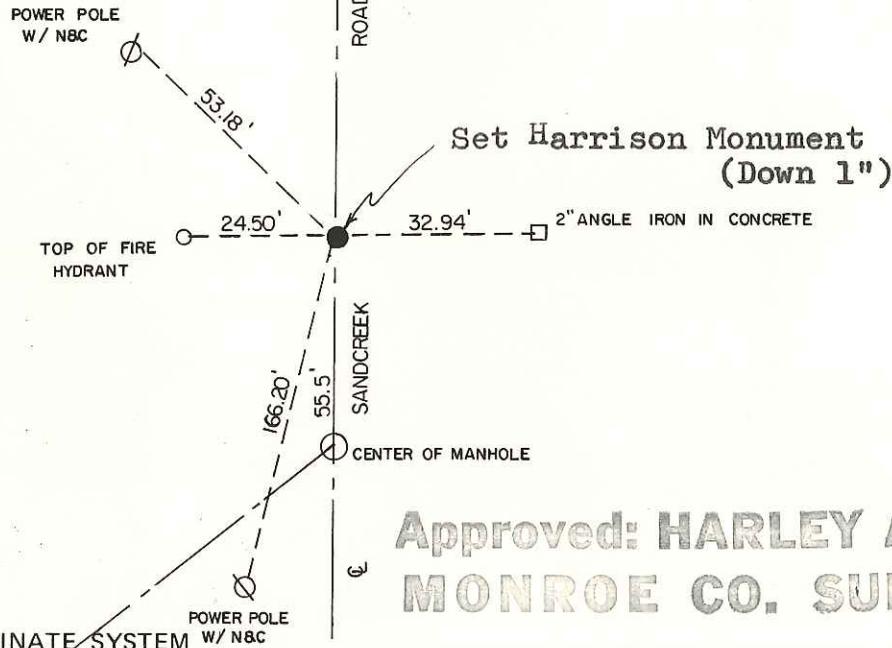

Approved: **HARLEY A. SIME**
MONROE CO. SURVEYOR

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, ~~Village or Town~~ Sparta
County of Monroe

COUNTY SURVEYOR FORM NO. 1

CERTIFICATE

CERTIFIED LAND CORNER

No. 83

Pg. 1

I, Harley A. Sime, do hereby certify that on the 24 day of July 1975, I found (evidence) (~~no evidence~~) of the N.W. corner of Section 25, T 17 N, R 4W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 22 day of Jan. 1976.

Harley A. Sime
County Surveyor
Title

History of original corner establishment:

Fred Holden set a stake in the center of the highway 15 Aug. 1902.




Description of corner evidence found:

Fred Zietlow replaced an existing railroad spike with a $\frac{3}{4}$ "x24" round iron bar 27 May 1969. Set a Harrison monument in place of iron bar.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

D. Malliet - Crew Chief, R.L.S.
D. Dade
T. Jeatran

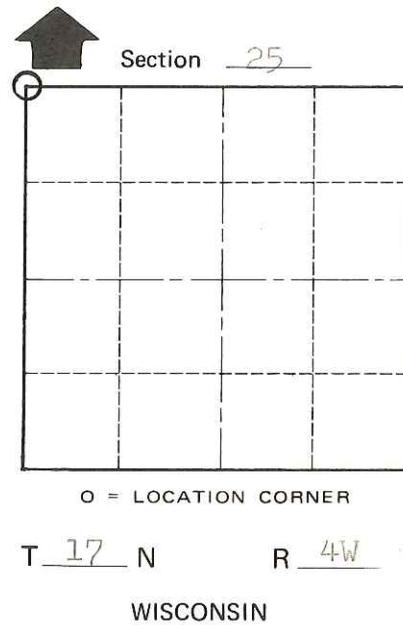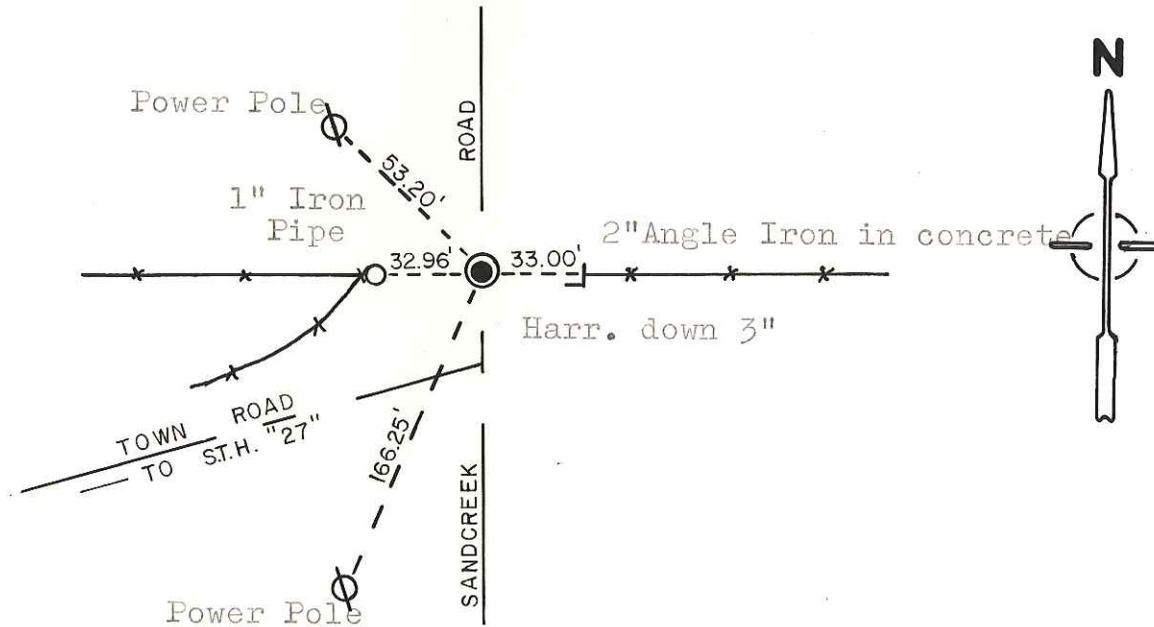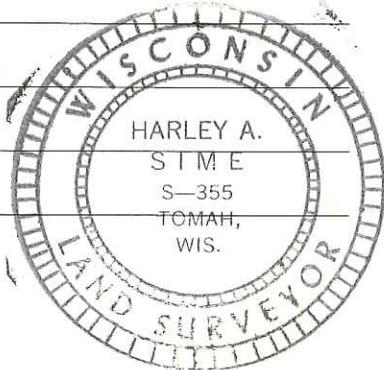

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Sparta

County of Monroe