

21704232000

I, Harley A. Sime, do hereby certify that on the 1st day of February 19 77, I found (evidence) ~~(no evidence)~~ of the W¹/₄ corner of Section 24, T 17 N, R 4 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 2nd day of Feb. 19 77.

Harley A. Sime
 County Surveyor
Title

History of original corner establishment:

Henry Schroeder was at this corner on July 1, 1884. Also, there was a stone at this corner when Holden was at this corner in 1902. The stone was in the center of the highway.

Description of corner evidence found:


Set the corner using data from previous surveys done in 1959 and 1960. Set a P.K. nail for a temporary corner. The road was frozen too hard to allow digging for the stone or the placing of a permanent marker.

Note: 4/29/77, Jung and Radcliffe

Removed the P.K. and replaced it with a Harrison marker, down 4". Found no stone. Very hard digging. Found another P.K. nail 4.5' to the South.

Note: 2/20/81
 Crew: Pietz, Meyer, Dechant
 The corner is now a chiselled cross set by Feddersen. The ties are O.K. The Harrison was destroyed during road construction

Section 24

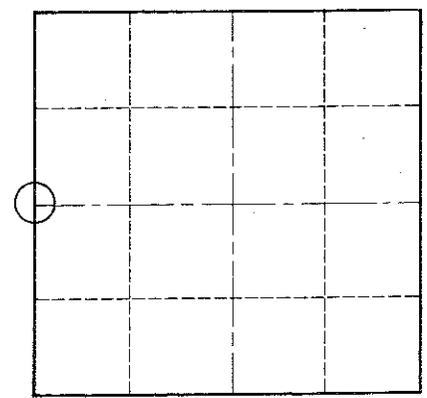

O = LOCATION CORNER

T 17 N R 4 W




WISCONSIN

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set a P.K. nail in the center of the highway. There is also another P.K. nail 0.66' East and 0.20' North of ours. This other P.K. was probably put in by Feddersen.

Witnesses to corner location:

W.C. Jung - Crew Chief *W.C. Jung*
C. Pietz

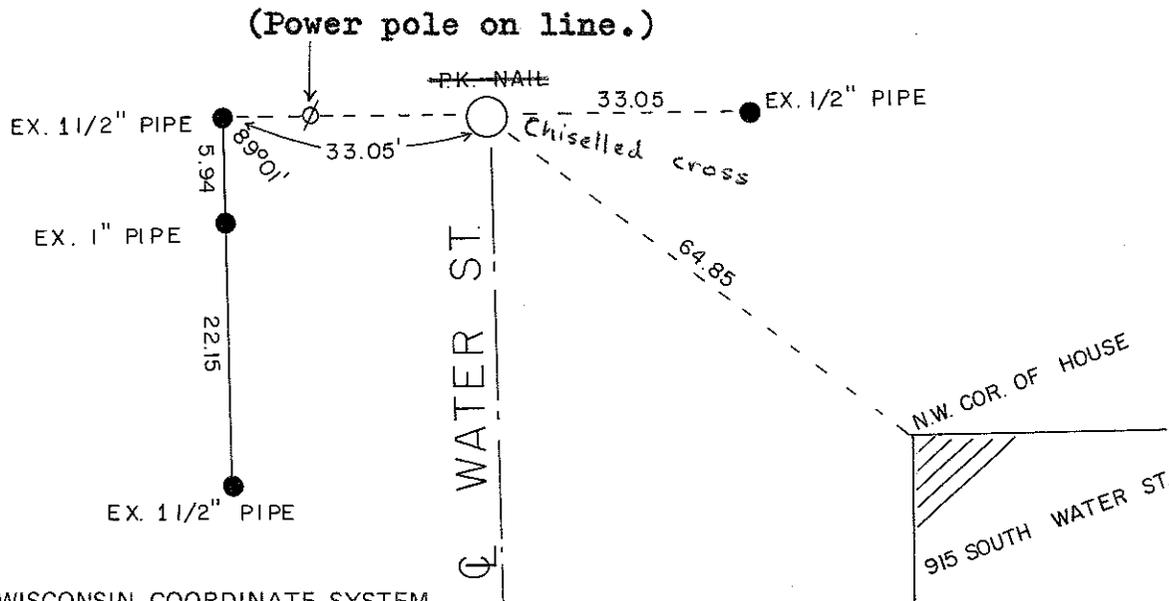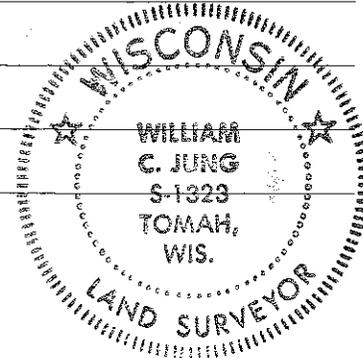

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Sparta

County of Monroe

COUNTY SURVEYOR FORM NO. 1