

CERTIFICATE

CERTIFIED LAND CORNER

No. 116

21704322000

I, Harley A. Sime, do hereby certify that on the 14 day of June, 1976, I found ~~(evidence)~~ (no evidence) of the E/4 corner of Sec. 32, T17 N, R 4 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of original corner establishment:

Dated this 13 day of July, 1976.




Harley A. Sime
 COUNTY SURVEYOR

Description of corner evidence found: I accepted the location of the SE corner of Section 32 according to parole and field evidence and the computed location of the NE corner of Sec. 32. The mile distance between computed to 5282.76', making the 1/2 mile distance 2641.38'. The existing fence corner in this vicinity fell 113'+ South of my computed location for this corner. Forty distances measured North from the SE corner were 1321'+ and 1206'+ respectively to existing fence corners. By the aerial photo the North and South section lines and the East-West quarterline appear to be nearly parallel. However, the East-West quarterline takes a bend to the South in the last forty distance before intersecting the East section line. By scaling on the air photo it appears to be off 100'+. With this information, I decided to place the corner on line and equidistant between the NE & SE section corners.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Douglas J. Malliet
 D.J. Malliet, Crew chief, R.L.S.
 A.L. Lueck
 B. Meyer

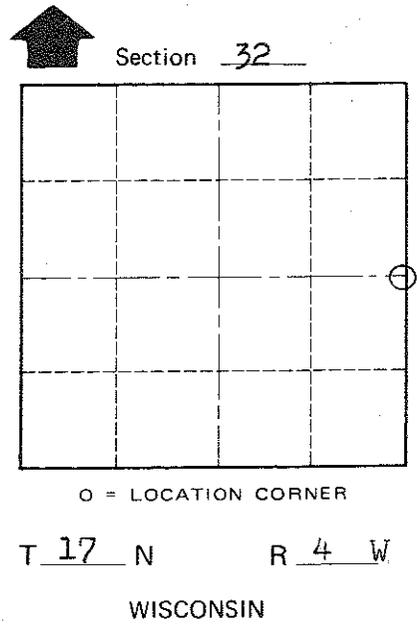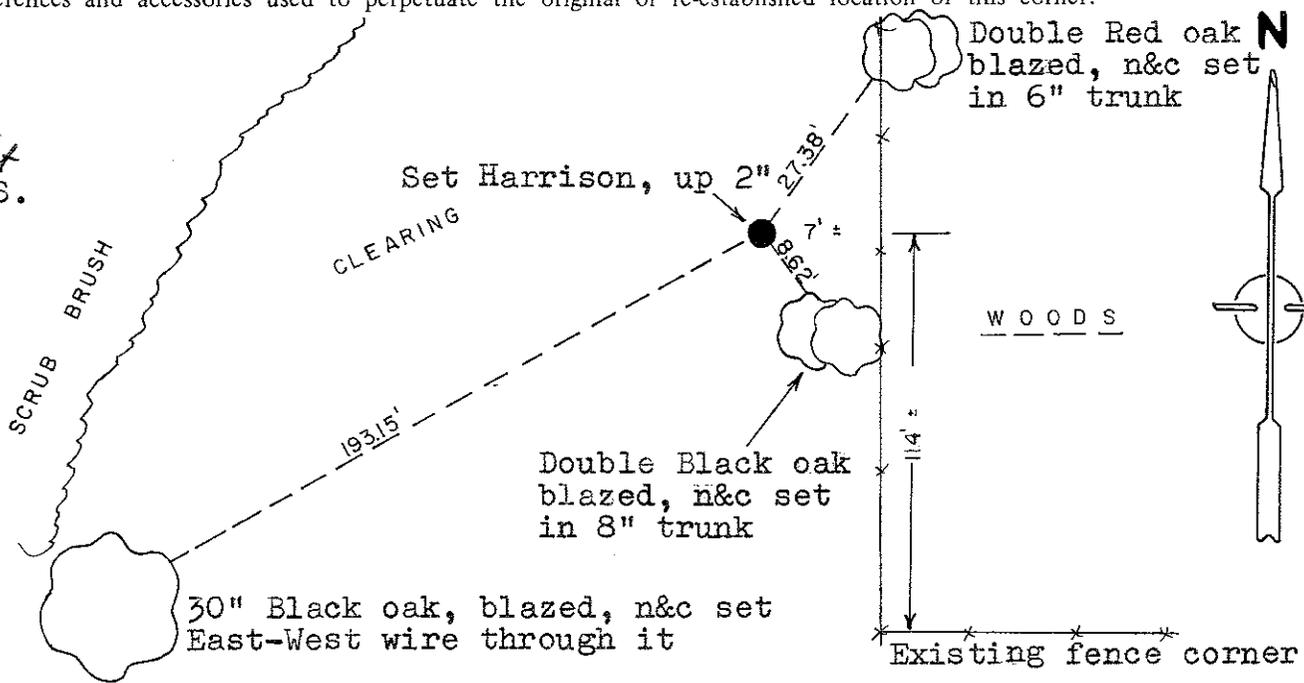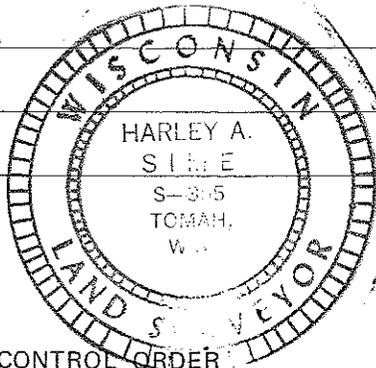

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town of Sparta

County of Monroe