U.S. LAND CORNER MAINTENANCE

Corner ID : W1/4 Sec. 6, T17N-R4W

21705012000

DATE	CREW	MONUMENT TYPE ----------
August 17, 2013	Zachariah P.Dechant Gary L. Dechant	Existing Harrison and sign, placed 6' anchor and concrete around Harrison

References:	Bearing	Distance
Set 1"x24" iron pipe, down 14" in middle of narrow field	N18W	39.55'
Set 1"x24" iron pipe, down 6", 4'SE of 16" White Oak	N31E	49.75'
Set 1"x24" iron pipe, down 8"in middle of small field	N89E	27.22'
Set 1"x24" iron pipe, down 4", north edge of field, south edge narrow tree/brush line between fields	S64W	17.88'

Gary L. Dechant

WISCONSIN
GARY L.
DECHANT
S-1744
CAMP
DOUGLAS, WI
LAND SURVEYOR

August 17, 2013

CERTIFICATE

I, Harley A. Sime, do hereby certify that on the 26 day of March 19 75, I found ~~(evidence)~~ (no evidence) of the W ¼ corner of Section 6, T 17 N, R 4 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 14 day of Jan. 19 76.

Harley A. Sime

County Surveyor
Title

CERTIFIED LAND CORNER

No. 14

21705012000

History of original corner establishment:

WISCONSIN
WILLIAM C. JUNG
S-1323
TOMAH, WIS.
LAND SURVEYOR

Description of corner evidence found:

Accepted "strong" occupied 4-way fence corner as the best available evidence.

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set Harrison marker, up 6".

Witnesses to corner location:

W.C.Jung- Crew Chief W.C. Jung

D. Malliet

A. Lueck

WISCONSIN
HARLEY A. SIME
S—355
TOMAH, WIS.
LAND SURVEYOR

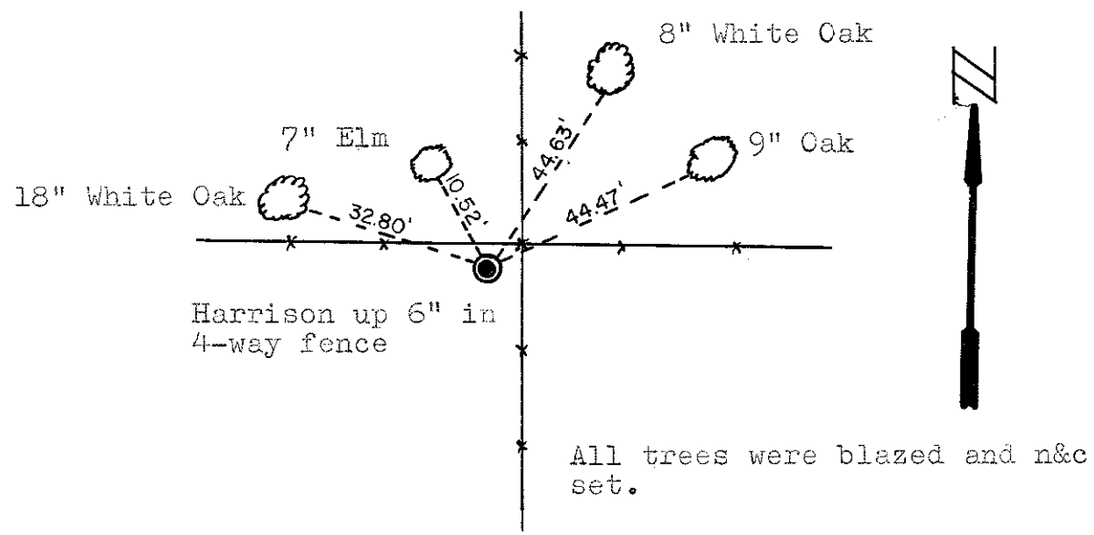

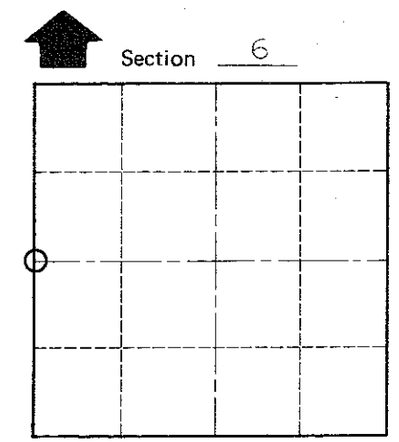

O = LOCATION CORNER

T 17 N R 4W

WISCONSIN

SURVEY CONTROL ORDER

Horizontal

Vertical

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Sparta

County of Monroe