

U.S. LAND CORNER MAINTENANCE

Corner ID : SE Sec. 7, T18N-R1W
21801070000

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u> -----
September 16, 2009	Zachariah P. Dechant Gary L. Dechant	Existing Harrison at fence corner, placed concrete around Harrison with 6' anchor, sign 1' north

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 1" iron pipe	N10W	19.68'
2) 12" White Oak, double blazed w/40d nail	S10W	27.88'
3) Set 1" iron pipe	S89W	20.28'
4) 18" Red Oak, double blazed w/40d nail set	N46W	21.89'

Gary L. Dechant



August 30, 2013

CERTIFICATE

CERTIFIED LAND CORNER

No. 51

21801070000

I, Harley Sime, do hereby certify that on the _____ day of _____ 1974, I found ~~(evidence)~~ (no evidence) of the NE corner of Section 18, T18 N, R1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of original corner establishment:

Description of corner evidence found:

Dated this 27 day of Feb 1975.

Set this corner by best available evidence in a 4-way fence intersection.



Harley Sime
County Surveyor
Title

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set standard Harrison monument up 3". Accessories described below :

Witnesses to corner location:

SURVEY CREW
D. Malliet
B. Jung
A. Lueck
K. Pritzlaff - Survey Crew Chief

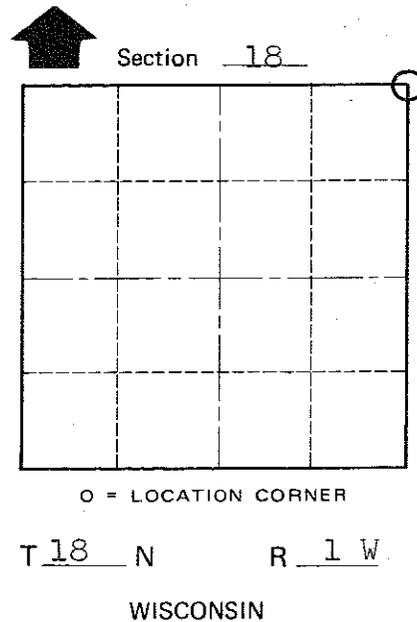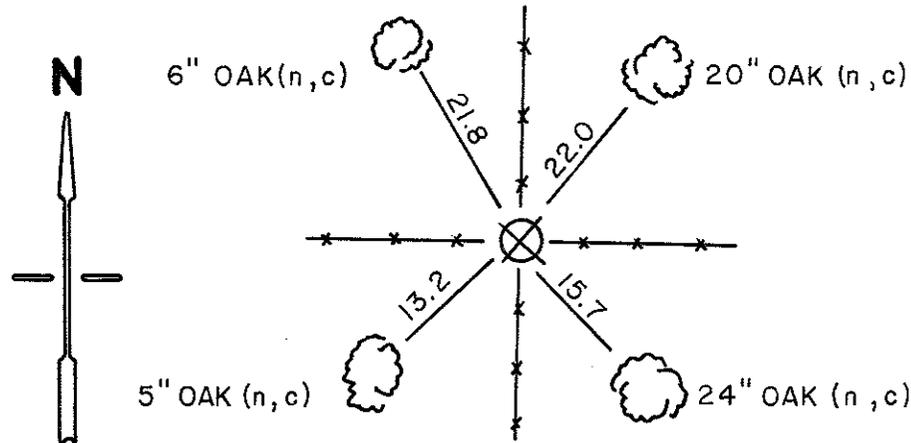

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town La Grange
County of Monroe