

63

**U.S. PUBLIC LAND CORNER
MAINTENANCE**

**Corner ID : SE Sec.14, T18N-R1W
21801140000**

| <u>DATE</u> | <u>CREW</u> | <u>MONUMENT TYPE</u> ----- |
|--|--|--|
| October 1, 2014 | Zachariah P.Dechant Gary L. Dechant | The 24" Oak next to the square iron bar, as shown on the tie sheet dated March 10, 1975, is now a 36"+ Oak and has completely grown over the iron bar. The entire tree would have to be removed to recover the bar. Found a PK nail on a flat spot on the very lower trunk that fit previous measured distances within a foot and fit's the remaining BT to the northeast. If the tree uproots, it will probably pull the iron bar with it. If it rots, future surveyor may find the iron bar in place and possibly in a somewhat different, but minor, location. We chose to reference the PK nail so as not to lose the corner completely. |
| <u>References:</u> | | |
| 1) Set 3/4"x24" square iron bar, down 6", 5' SW of 12" Black Oak | <u>Bearing</u> N63E | <u>Distance</u> 20.75' |
| 2) Set 3/4"x24" square iron bar, down 6" in grassy area | South | 24.65' |
| 3) Set 3/4"x24" square iron bar, down 6" in grassy area | South | 75.34' |
| 4) Set 3/4"x24" square iron bar, down 6" west of driveway | S63W | 57.45' |

Reference markers are set on straight lines with SE corner Sec. 14 (PK Nail)

Gary L. Dechant

October 1, 2014

CERTIFICATE

CERTIFIED LAND CORNER

No. 63

I, Harley Sime, do hereby certify that on the _____ day of _____ 19 74, I found (evidence) (~~no evidence~~) of the SW corner of Section 13, T18 N, R 1 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 10 day of March 19 75.

Harley Sime

COUNTY SURVEYOR
Title

History of original corner establishment:

Description of corner evidence found:

Found a 24" oak tree with blazes on all four sides and evidence of old wire running through. Witnesses mark this tree as the corner, setting a 1"x1" square iron bar S.E. of tree approximately 9".



See Reverse Side For Maintenance

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set a 1"x1" square iron bar 9" SE of an old Oak tree with blazes on all four sides and old wire evidence. Accessories are as follows :

Witnesses to corner location:



SURVEY CREW

K. Pritzlaff - Survey Crew Chief

D. Malliet

B. Jung W.C. Jung

A. Lueck

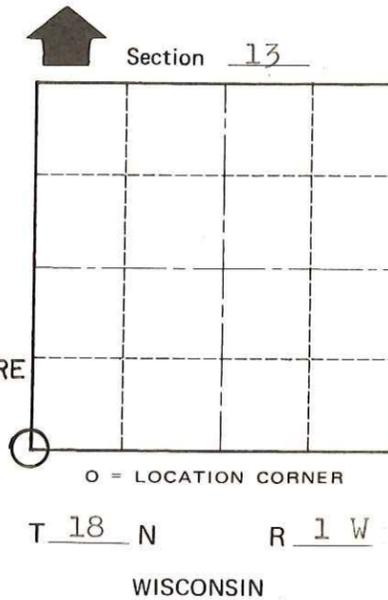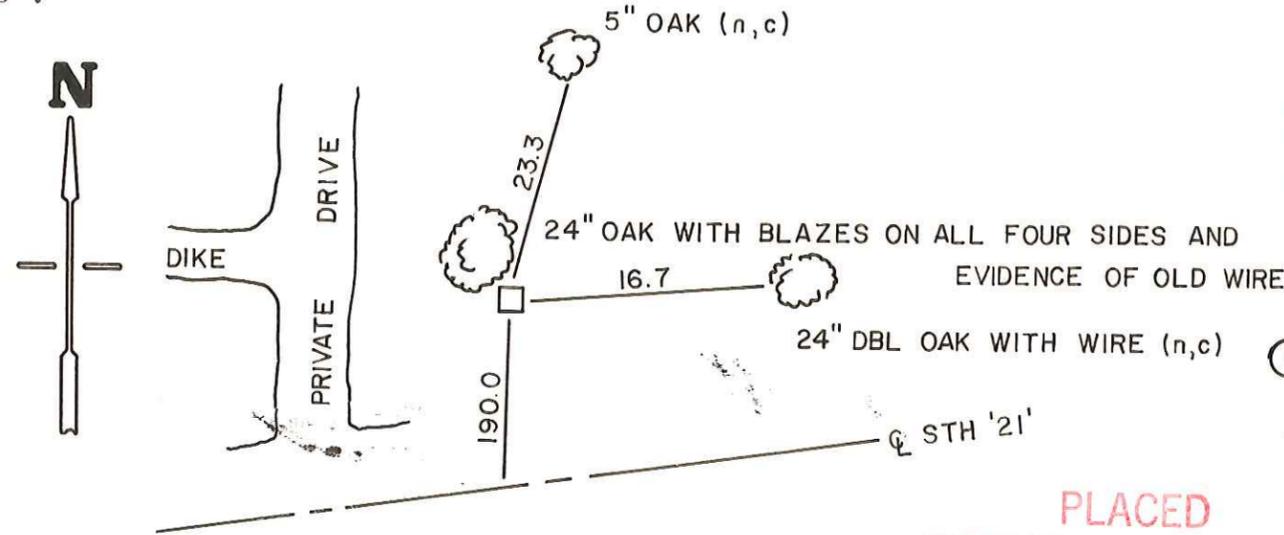

SURVEY CONTROL ORDER

| | |
|------------|-------|
| Horizontal | _____ |
| Vertical | _____ |

WISCONSIN COORDINATE SYSTEM

| Corner | East (X) | North (Y) | Elevation (Z) | Zone |
|-------------------|----------|-----------|---------------|------|
| Control Sta. Name | | | | |

PLACED COUNTY SURVEYOR'S SIGN 5-19-87

City, Village or Town La Grange

County of Monroe