

21801152000

I, Harley A. Sime, do hereby certify that on the 17th day of February 1976, I found ~~(evidence)~~ (no evidence) of the East 1/4 corner of Section 15, T 18 N, R 1 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 17th day of Feb. 1976.

Harley A. Sime  
 County Surveyor  
 Title

History of original corner establishment:

Henry Schroeder surveyed in Section 15 in 1888.

Description of corner evidence found:

Set the corner by intersecting the East-West 1/4 line of Section 15 with the East line of Section 15.



The iron pipe as set is not the actual corner, but is a witness corner. The actual corner is N61°46'W, 4.4 feet, more or less from the iron pipe; the latter bearing being a True Bearing. The pipe was set as such due to existing field conditions.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Set a 2 1/2" x 10ft. iron pipe in a drainage canal out in a tamarack swamp. This pipe is a witness corner.

Witnesses to corner location:

W.C. Jung - Crew Chief W.C. Jung  
C. Pietz

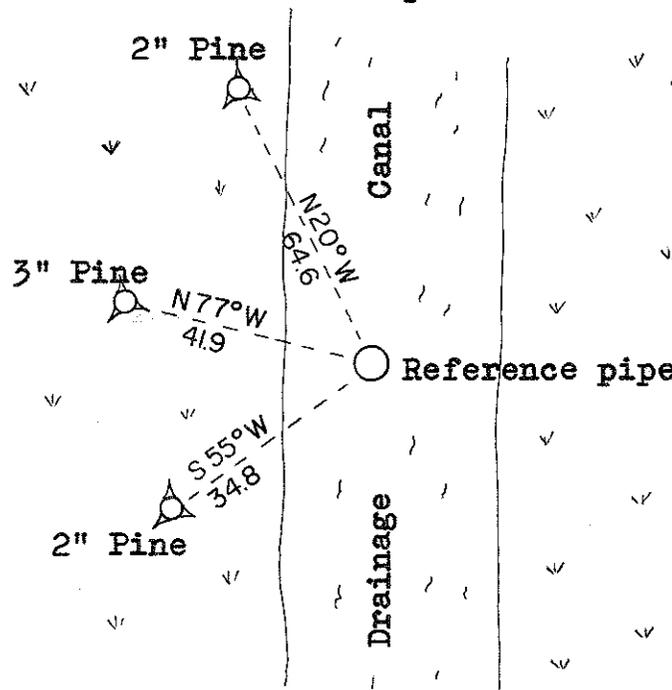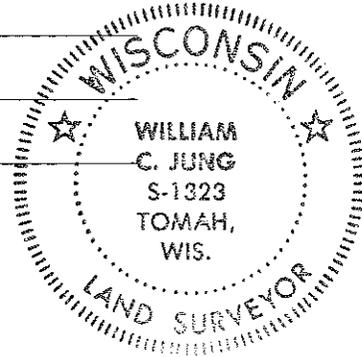

N  
 ↑  
 MAGNETIC NORTH  
 (Bearings were taken with a hand compass.)

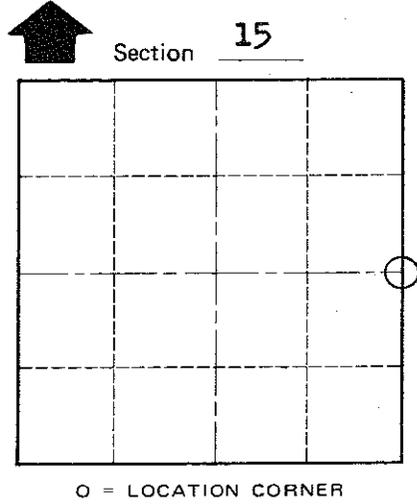

T 18 N R 1 W  
 WISCONSIN

(All trees were not blazed.)

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town La Grange

County of Monroe