

21801160020

I, Harley A. Sime, do hereby certify that on the 15th day of October 1975, I found ~~(evidence)~~ (no evidence) of the South 1/4 corner of Section 16, T 18 N, R 1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 5th day of Feb. 1976

Harley A. Sime
County Surveyor
Title

History of original corner establishment:

Description of corner evidence found:





Projected the bearing, between the North 1/4 corner of Sec. 16 and the existing Center 1/4 corner of Sec. 16, South and intersected it with the bearing between the S.W. and S.E. corners of Sec. 16. The resulting half mile distances along the South line of Sec. 16 are almost equal.

UPDATE: A resurfacing project was to take place in the summer of 1993. Previous ties were checked and an additional tie was taken. The monument of record was then removed. Following the resurfacing project a 1 1/4" x 12" round iron bar was set.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Witnesses to corner location:

W.C. Jung-Crew Chief W.C. Jung
A. Lueck

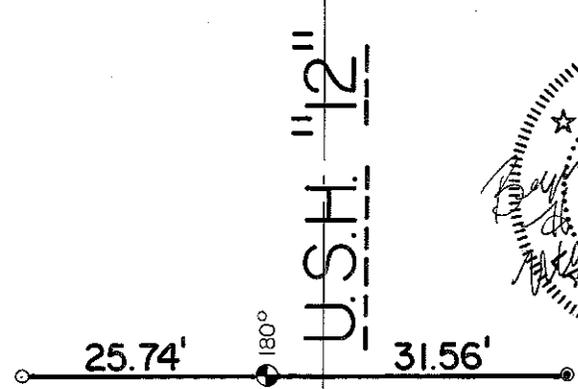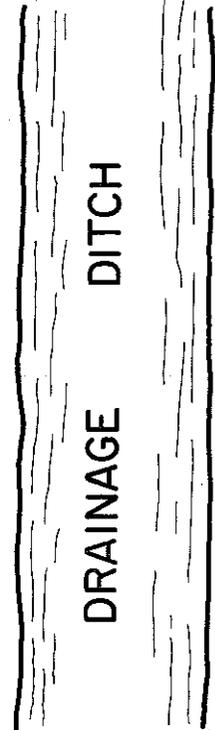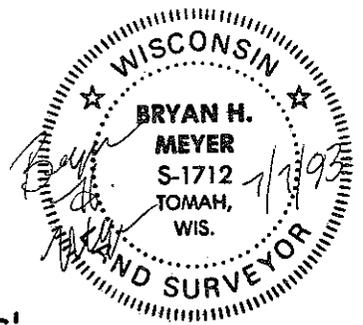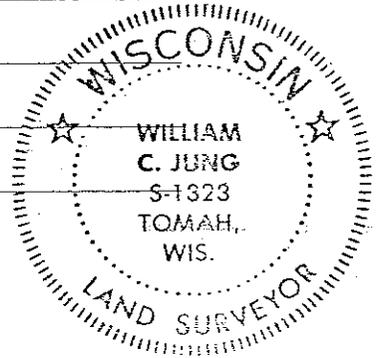

- = Set 1 1/4" x 12" round iron bar
- = Existing 1 1/4" round iron bar
- ⊙ = Set 1 1/4" x 24" iron pipe

Ex. sign here

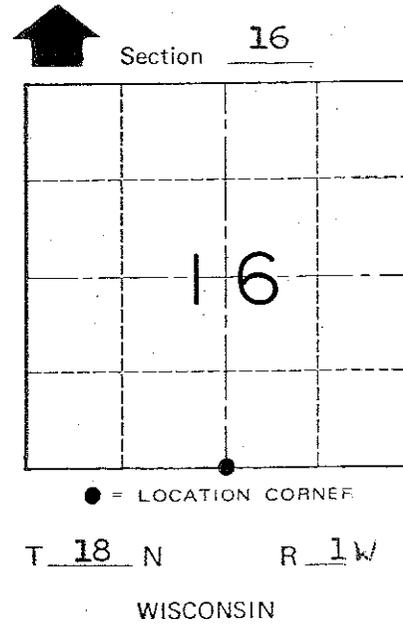

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal _____
Vertical _____

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

WISCONSIN COORDINATE SYSTEM

Town La Grange
County of Monroe

CERTIFICATE

CERTIFIED LAND CORNER

No. 68

See Pg. 2

I, Harley A. Sime, do hereby certify that on the 15th day of October 1975, I found ~~(evidence)~~ (no evidence) of the South 1/4 corner of Section 16, T 18 N, R 1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of original corner establishment:

Description of corner evidence found:

Projected the bearing, between the North 1/4 corner of Sec. 16 and the existing Center 1/4 corner of Sec. 16, South and intersected it with the bearing between the S.W. and S.E. corners of Sec. 16. The resulting half mile distances along the South line of Sec. 16 are almost equal.

Dated this 5th day of Feb. 19 76.

Harley A. Sime

County Surveyor

Title

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Set a P.K. nail in S.T.H. "12", 7.2 ft. West of the hwy. centerline, and 4.7 ft. East of the edge of the asphalt.

Witnesses to corner location:

W.C. Jung-Crew Chief

W.C. Jung

A. Lueck

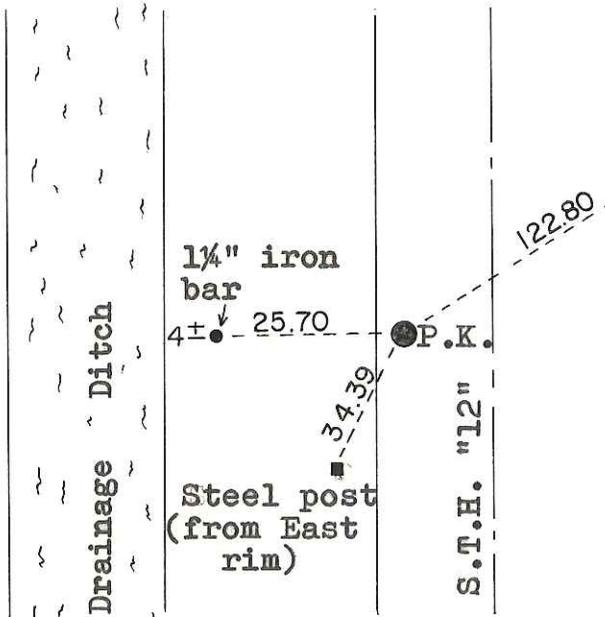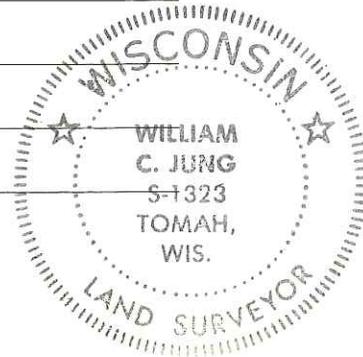


SIGN PLACED 12/16/86
Mayor, Kenworthy

"Millston & Black River Falls" sign

Replaced P.K. nail With 1/4" x 10 1/2" L.B.

On 2/28/85. Crew: Meyer, Sime T 18 N R 1 W

Comments Bar is down 1 1/2

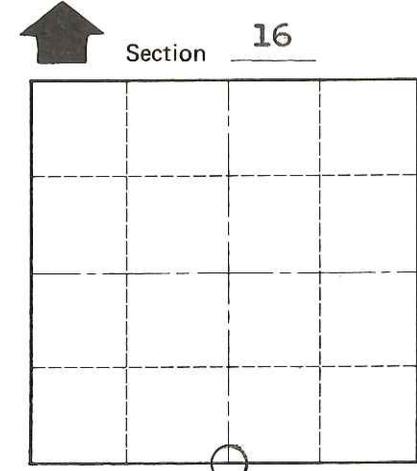

O = LOCATION CORNER

WISCONSIN

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal _____
Vertical _____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town La Grange

County of Monroe