

107

**U.S. PUBLIC LAND CORNER
MAINTENANCE**

Corner ID : SE Sec.28, T18N-R1W

21801280000

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE -----</u>
July 20, 2015	Zachariah P. Dechant Gary L. Dechant	Existing Railroad spike 10.5' north of North Glendale and East Veteran's St. intersection.

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" hex iron bar 7' south of 30" Ash on north side of Veteran's Administration fence	N53°14'24"E	115.96'
2) Set 3/4"x24" hex iron bar 11' west of SW corner of Tomah Area High School building	S31°35'02"E	142.63'
3) Set 3/4"x24" hex iron bar 1' east of VA aluminum fence corner at sw quad of street intersection	S45°51'31"W	75.28'
4) Set 3/4"x24" hex iron bar on south end flower garden with VA electronic sign	N50°04'53"W	76.74'

ASSUMED BEARINGS.

Bearing & distance to S1/4 of Section 28: N89°53'16"E, 2641.60'

Gary L. Dechant

July 20, 2015

I, William C. Jung, do hereby certify that on the 9th day of November 1977, I found (evidence) (no evidence) of the NW Corner corner of Section 34, T18 N, R1 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 9th day of Jan. 1978.

William C. Jung, R.L.S. 1323

Crew Chief, County Surveyor's Office

History of original corner establishment:

Henry Schroeder was at this corner in January of 1892.

Description of corner evidence found:

Found and accepted an iron bar used in previous surveys. The road conditions do not allow the setting of a Harrison Marker at this point.


Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Found an iron pipe in the pavement, down 1"±, 10.5' North of centerline of

Witnesses to corner location: C.T.H. "E".



W. Jung

G. Dechant



Approved: Harley A. Sime County Surveyor

North

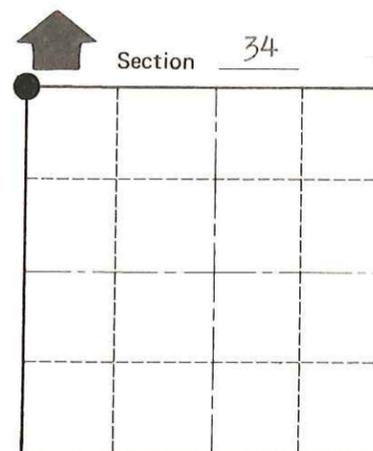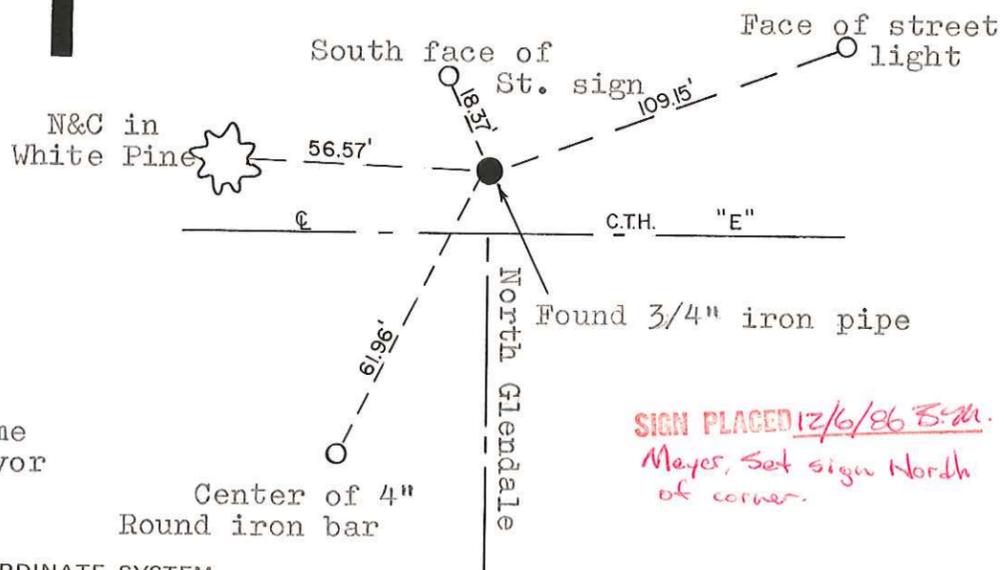

O = LOCATION CORNER
T 18 N R 1 W
WISCONSIN

SIGN PLACED 12/6/86 B.M. Meyer, Set sign North of corner.

SURVEY CONTROL ORDER

Table with 2 rows: Horizontal, Vertical

WISCONSIN COORDINATE SYSTEM

Table with 5 columns: Corner, East (X), North (Y), Elevation (Z), Zone

City, Village or Town Tomah

County of Monroe

COUNTY SURVEYOR FORM NO. 1