

21801302000

I, Harley Sime, do hereby certify that on the 21st day of October 1974, I found (evidence) ~~(no evidence)~~ of the E1/4 corner of Section 30, T 18 N, R 1 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of original corner establishment:

In May of 1902 Fred Holden (County Surveyor) resurveyed Section 29 and set a stone at the W1/4 corner.

Description of corner evidence found:

Found this stone on the West side of the fence. Top of said stone was broken. Set a Harrison marker South of and next to the stone so as to serve as a witness corner. Said stone is the corner. The stone was found on 10/21/1974 and the Harrison was placed on 8/11/1975

Dated this 11 day of August 1975.





Harley Sime
COUNTY SURVEYOR
Title

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:
The stone was found to be protruding above the ground about 5" and measured 6"x11".
Accessories are as follows:

Witnesses to corner location:

- Survey Crew
- K. Pritzlaff - Survey Crew Chief
- G. Sime
- B. Jung *W.C. Jung*
- G. Dechant
- D. Dade

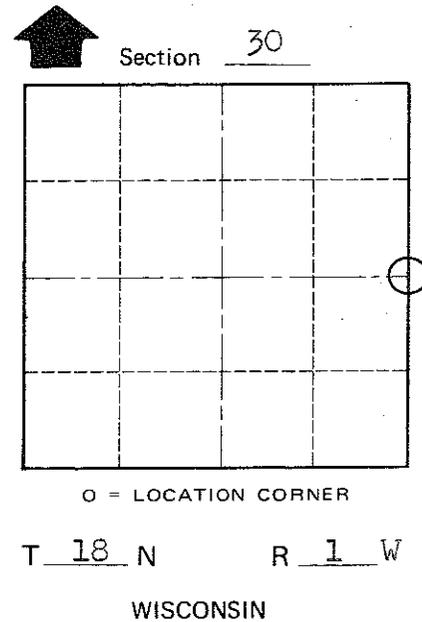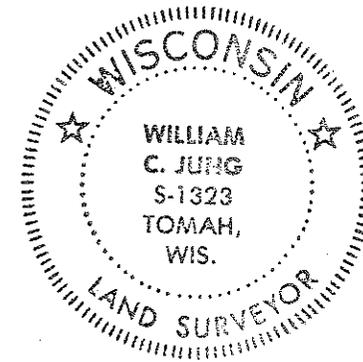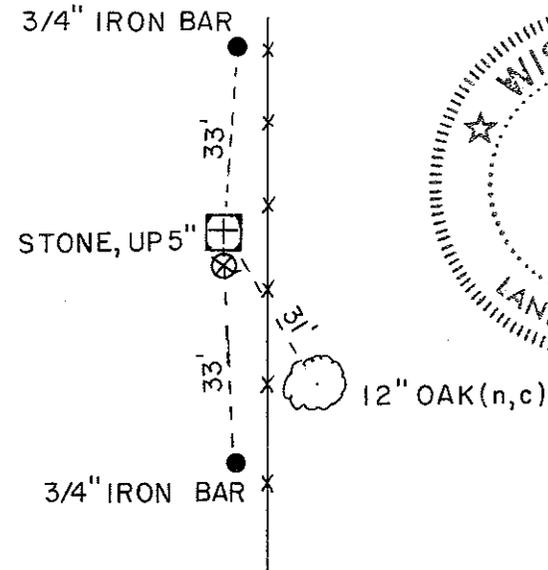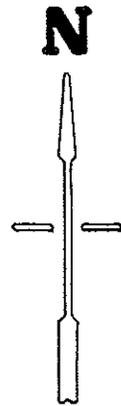

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town La Grange
County of Monroe