

# 131 / 11

# U.S. PUBLIC LAND CORNER MAINTENANCE

Corner ID : SE Sec. 31, T18N-R1W


21801310000

DATE	CREW	MONUMENT TYPE -----
April 29, 2016	Zachariah P.Dechant Gary L. Dechant	Found 1 1/4" round iron bar, 16' west and 25 north of intersection of CTH "ET" & Gondola Road

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" round iron bar, down 6, in line with power line	N14E	59.44
2) Set 3/4" x 24" round iron bar, down 6", 7' W & 13' S of telephone ped	S43E	94.93'
3) Set 3/4" x24" round iron bar, down 12" in field	S14W	76.29'
4) Set 3/4" x 24" round iron bar, down 6" 13' south of SE corner of wood fence	N43W	77.04'
5) Set 40d nail in new power pole	N60E	18.96

SE corner Sec. 31 land reference markers set on straight lines

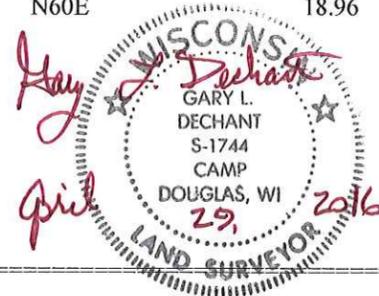

I, Harley Sime, do hereby certify that on the \_\_\_\_\_ day of \_\_\_\_\_ 19 74, I found (evidence) ~~(no-evidence)~~ of the SW corner of Section 32, T 18 N, R 1 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 23 day of July 19 75.

Harley Sime  
County Surveyor  
Title

History of original corner establishment:

Description of corner evidence found:

Found existing Harrison monument at corner site

**See Reverse Side  
For Maintenance**

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Found standard Harrison monument and tied it in with accessories as follows:



Witnesses to corner location:

Kim H Fritzlaff - Survey Crew Chief

D. Makiet

A. Lueck

B. Jung

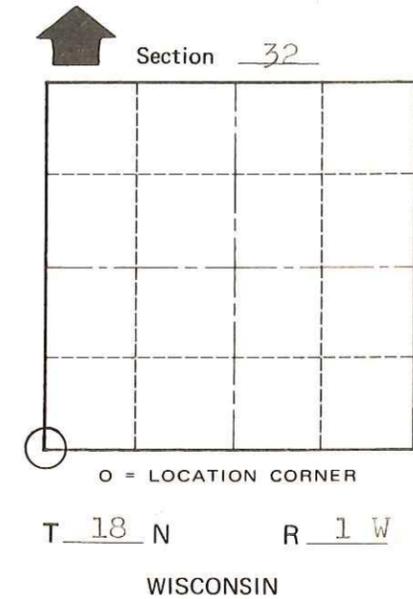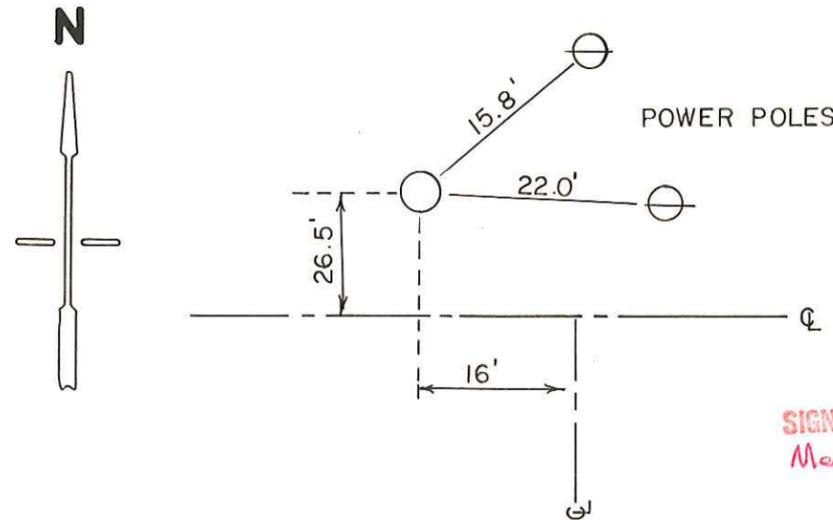

**SIGN PLACED 12/16/86  
Mayer, Kenworthy**

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town La Grange

County of Monroe

COUNTY SURVEYOR FORM NO. 1