

116

**U.S. PUBLIC LAND CORNER
MAINTENANCE**

Corner ID : E1/4 Sec. 32 T18N-R1W


21801322000

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u> -----
August 5, 2016	Zachariah P.Dechant Gary L. Dechant	Existing Harrison, intact, 33' east & 23' north of Hayward Ave/Jefferson St. intersection. 1' west of fire no. sign 24054 Jefferson

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" round iron bar, down 6", 4' north of NE corner of house	S48E	97.32'
2) Set 3/4"x24 round iron bar, down 6" 3' north of NW corner of house	S27E	70.87'
3) Set 3/4"x24" round iron bar, down 6", in lawn	S40W	91.98'
4) Set 3/4"x24" round iron bar, down 8" in field	N48W	37.60'
5) Existing 1" iron pipe	North	24.75'

Harrison and reference markers 1 & 4 set on straight lines.

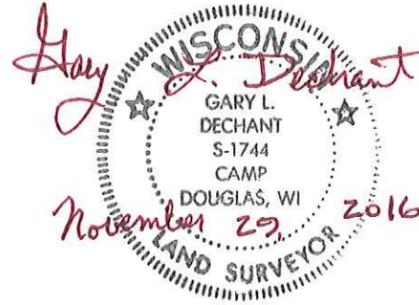

I, Harley Sime, do hereby certify that on the _____ day of _____ 19 74, I found (evidence) (~~no evidence~~) of the W 1/4 corner of Section 33, T 18 N, R 1 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 17 day of March 1975.

Harley Sime
COUNTY SURVEYOR
Title

History of original corner establishment:

It is believed that W. Kenyon was at this corner in 1887. Fred Holden was here in Aug. of 1903.

**See Reverse Side
For Maintenance**

Description of corner evidence found:

Found an existing 1 1/2" iron pipe accepted as the 1/4 corner and replaced it with a standard Harrison monument.

This corner has been used and accepted as per numerous surveys.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set a standard Harrison monument up 3" in a fence line, with the accessories shown as follows :

Witnesses to corner location:

- SURVEY CREW
- K. Fritzlaff - Survey Crew Chief
- D. Malliet
- B. Jung
- A. Lueck

1992 survey crew: Garold A. Sime
John Kenworthy
Brent Kostka
July 7th, 1992



SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town La Grange
County of Monroe

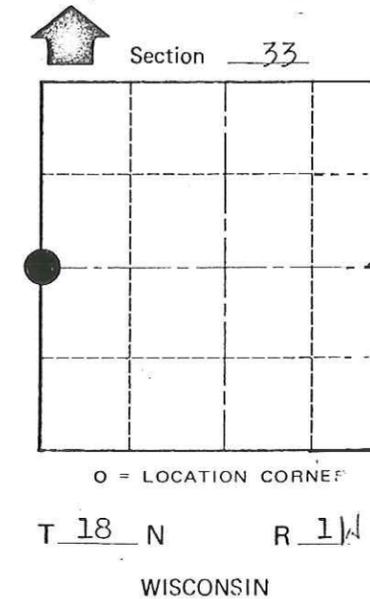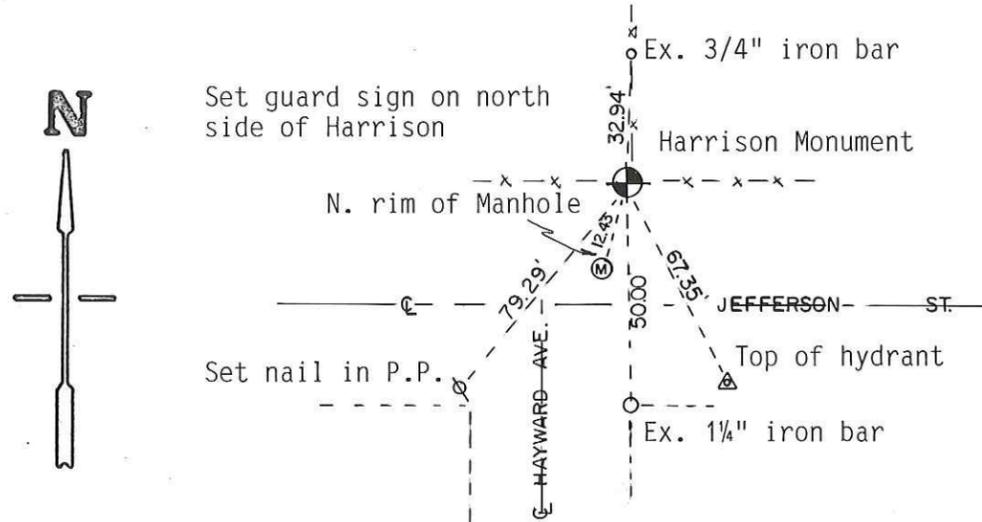

COUNTY SURVEYOR FORM NO. 1

CERTIFICATE

CERTIFIED LAND CORNER

No. 116

See New Sheet

I, Harley Sime, do hereby certify that on the _____ day of _____ 19 74, I found (evidence) (~~no evidence~~) of the W 1/4 corner of Section 33, T 18 N, R 1 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 17 day of March 1975.

Harley Sime
COUNTY SURVEYOR
Title

History of original corner establishment:

See Reverse Side For Maintenance

Description of corner evidence found:

Found an existing 1 1/2" iron pipe accepted as the 1/4 corner and replaced it with a standard Harrison monument.

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set a standard Harrison monument up 3" in a fence line, with the accessories shown as follows :

Witnesses to corner location:



SURVEY CREW

K. Fritzlaff - Survey Crew Chief

D. Malliet

B. Jung

A. Lueck

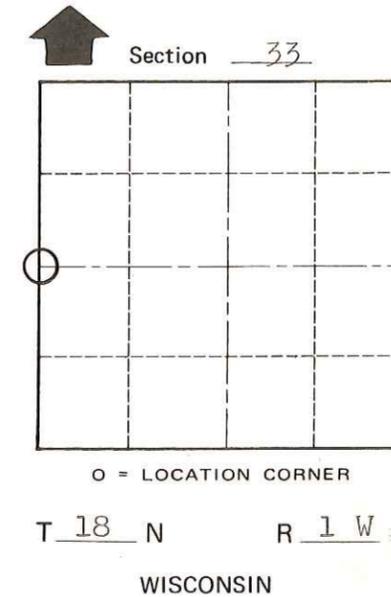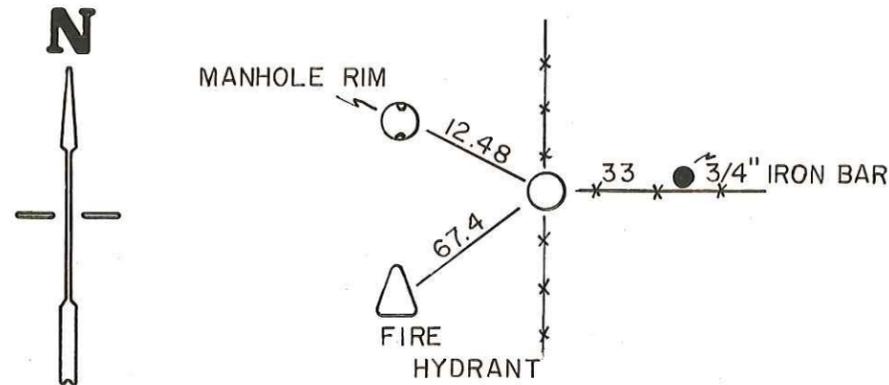

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town La Grange

County of Monroe