

88

**U.S. PUBLIC LAND CORNER
MAINTENANCE**


**Corner ID : S1/4 Sec. 21, T18N-R2W
21802210020**

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u> -----
November 11, 2016	Zachariah P.Dechant Gary L. Dechant	Existing Harrison intact, 25' NW of curve of Fireworks Ave Flush with ground, sign 1' west 12" Black Oak N20W, 79.48' & 8" Burr Oak, N16E, 76.25' still alive.

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" round iron bar, down 6", 8' SW of 20" Black Oak	N44E	70.44'
2) Set 3/4"x24 round iron bar, down 10" in field	S36E	83.10'
3)Set 3/4"x24" round iron bar, down 6"	S44W	41.63
4) Set 3/4"x24" round iron bar, down 6", 3' north of cut off power pole used as fence post	N36W	37.16

Harrison & reference markers set on straight lines.

Gary L. Dechant

December 20, 2016

See Reverse Side
For Maintenance

CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 21st day of May, 2013

Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

History of corner established since Original Government Survey

In December of 1987 Gary Dechant set a Harrison monument by using single proportionate measurement.

Description of evidence found

On August 30th, 2012, Anderson Engineering of Minnesota located the Harrison monument flush with the ground and 0.3 feet east of a metal witness post with survey marker sign.

No. 28
21802210020



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:



Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 405445.07
Easting (X) 676054.90

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

All distances are shown in U.S. Survey Feet.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

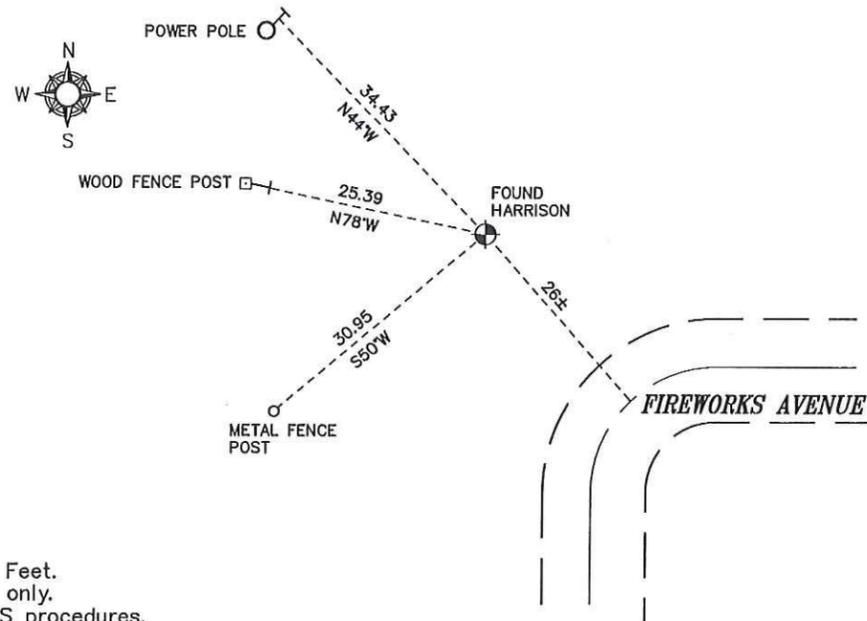

⊕ = LOCATION CORNER
Corner I.D. S 1/4 21
T 18 N R 2 W
Town of Greenfield
Monroe County, WI.

I, Gary L. Dechant, do hereby certify that on the 22nd day of December 1987, I found (evidence) (no evidence) of the S 1/4 corner of Section 21, T 18 N, R 2 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 31st day of Dec. 1987.

Gary L. Dechant
Registered Land Surveyor, 1744
Title

History of corner establishment since Original Government Survey

No known history since the original government survey.

Description of corner evidence found:

Set by single proportionate measurement.

See Reverse Side For Maintenance





COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Gary L. Dechant
David E. Madison

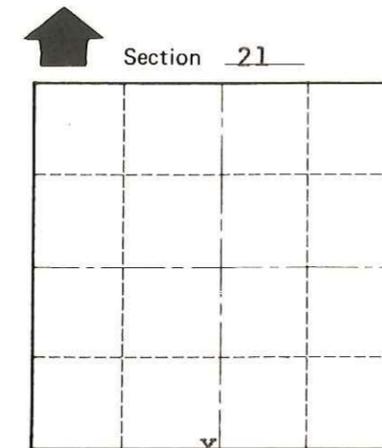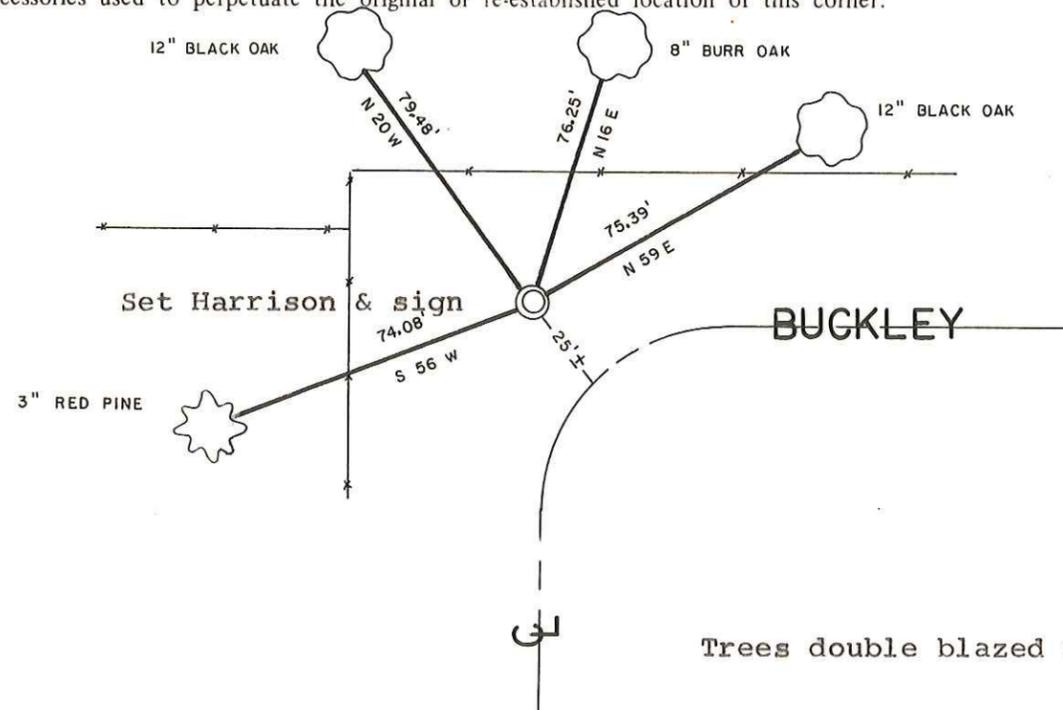

O = LOCATION CORNER

T 18 N R 2 W

WISCONSIN

Trees double blazed with N&C's set.

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Greenfield

County of Monroe