

# 77


**U.S. PUBLIC LAND CORNER  
MAINTENANCE**

**Corner ID : E1/4 Sec. 21, T18N-R2W  
21802212000**

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u> -----
November 11, 2016	Zachariah P.Dechant Gary L. Dechant	Existing Harrison intact, flush, at intersection of CTH "E", Eden AVE, Edgew2ater Road intersection

<u>References:</u>	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" round iron bar, down 12" in field	N30E	81.89'
2) Set 3/4"x24 round iron bar, down 12" in field	S50E	72.05'
3)Set 3/4"x24" round iron bar, down 6", in line with NW corner of old school house	S30W	57.38'
4) Set 3/4"x24" round iron bar, down 6" in island between roads 7' west of 20" Burr Oak	N50W	44.65'

**Harrison & reference markers set on straight lines.**

*Gary L. Dechant*  
  
*December 20, 2016*

See Reverse Side  
For Maintenance

**CERTIFICATE**

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013

Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

**CERTIFIED LAND CORNER**

History of corner established since Original Government Survey

Duane Marten set an iron bar at this location in July of 1972. In June of 1979 William Jung found the iron bar and replaced it with a Harrison monument.

Description of evidence found

On January 24th, 2012, Anderson Engineering of Minnesota located the Harrison monument 0.2 feet below grade in the center of the intersection of Eden Avenue and Edgewater Road.

No. 77  
**21802212000**



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald



MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 408081.37  
Easting (X) 678653.11

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00



All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

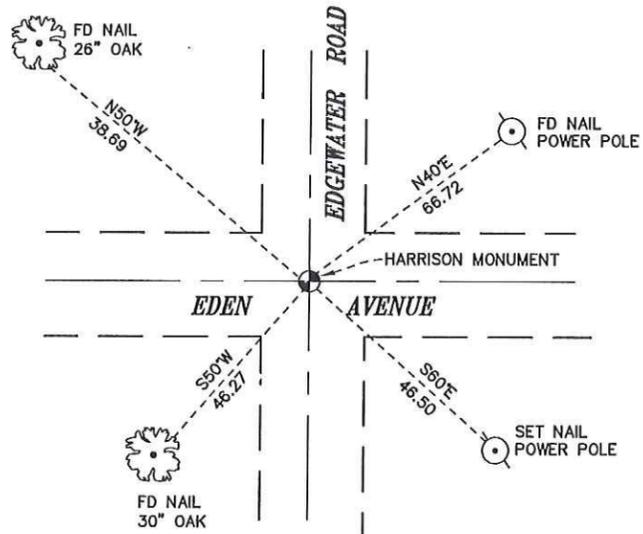

⊕ = LOCATION CORNER  
Corner I.D. E 1/4 21  
T 18 N R 2 W  
Town of Greenfield  
Monroe County, WI.

I, William C. Jung, do hereby certify that on the 25<sup>th</sup> day of June 19 79, I found (evidence) ~~(no evidence)~~ of the West 1/4 corner of Section 22, T 18 N, R 2 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 10<sup>th</sup> day of Feb. 19 81.  
William C. Jung  
 William C. Jung, R.L.S. 1323  
 Title

History of original corner establishment:  
 Duane Marten set an iron bar at this corner in July of 1972.

Description of corner evidence found:

Found the corner of record at the occupied corner, removed the iron bar, and replaced it with a Harrison marker. The burr oak to the Northwest could be an original bearing tree. It fits our corner very well.

**See Reverse Side For Maintenance**


COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Removed 3/4" iron bar and replaced it with Harrison Monument.

Witnesses to corner location:

Jung  
Pietz

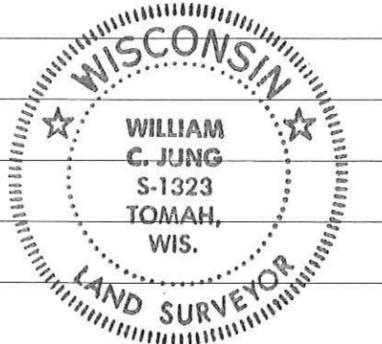

NOTE: BOTH TREES BLAZED WITH NAIL & CAP SET

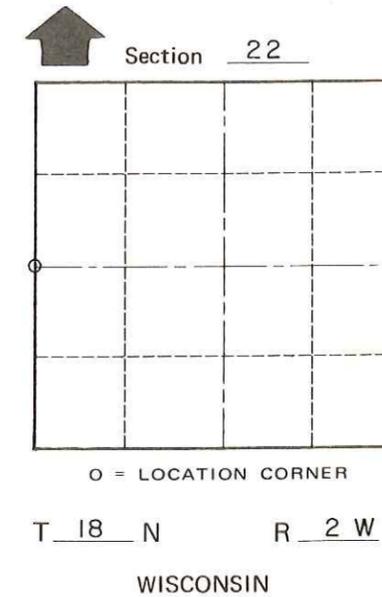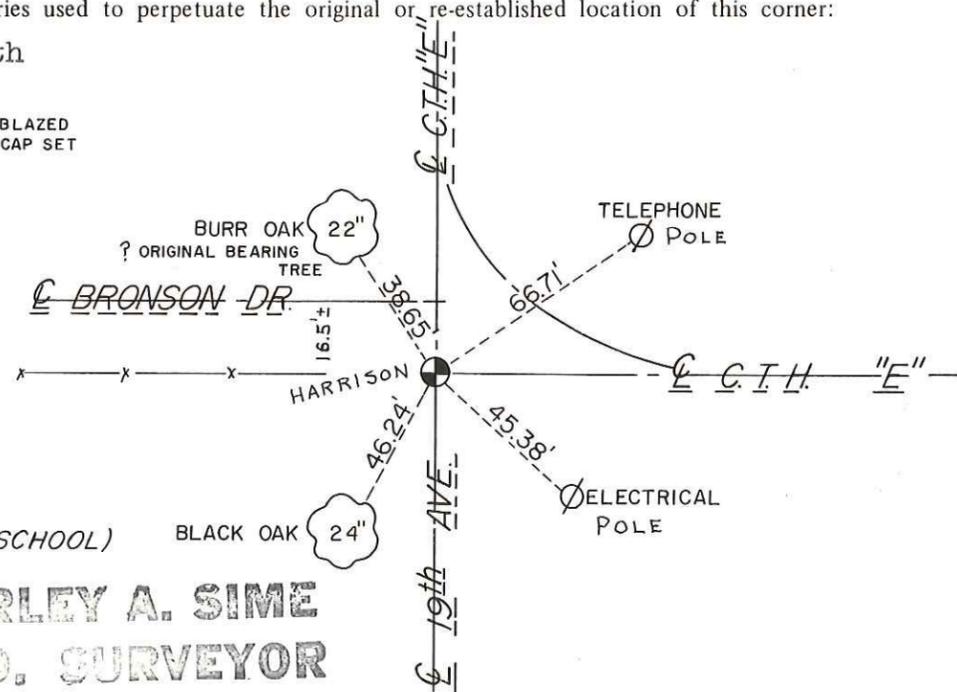

SURVEY CONTROL ORDER

Horizontal \_\_\_\_\_  
 Vertical \_\_\_\_\_

Approved: **HARLEY A. SIME**  
**MONROE CO. SURVEYOR**

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City or Town~~ or Town Greenfield  
 County of Monroe