


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

SECTION 19, T18N, R4W, TOWN OF SPARTA  
MONROE COUNTY, WISCONSIN

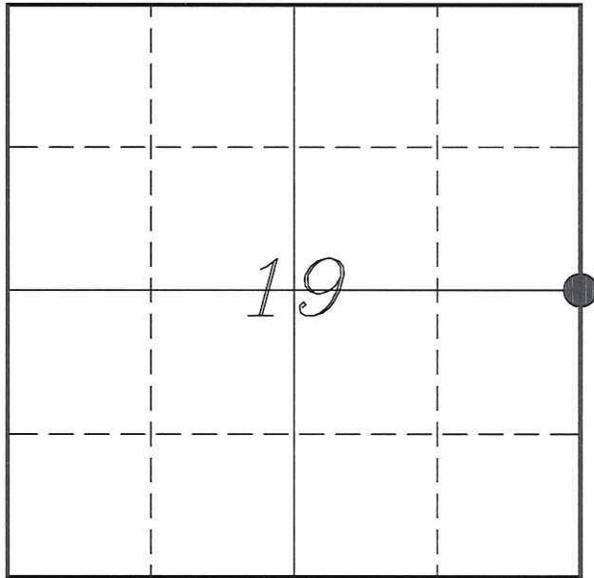

LOCATION OF LANDMARK

MONROE COUNTY COORDINATE SYSTEM	
Northing	407927.015
Easting	605136.458
Datum	NAD 1983 (1991)
Elevation	
Datum	
TYPE OF LANDMARK:	
Set Harrison Monument	
BEARINGS ARE REFERENCED TO:	
Monroe County Coordinates	

Witnesses: Larry Handschy

Date: 10 November 2013

Describe any record evidence, monument evidence, testimonial evidence or any other material evidence you considered and whether the monument was found or restored through acceptance of an obliterated evidence location.

No bearing trees of record were located.

I found a 2-way fence corner about 34' South of the equi-distance location. The fence wire is an old type and it has been well maintained.

This fence corner is approximately 12' South of the extension of Fairway Road. The road was originally laid out so that this short East/West stretch was on the Quarter line.

No other occupation or evidence was noted at this time.

I accepted the fence corner as the best available evidence of the original government corner and placed a Harrison Monument.

Describe or show any material discrepancy between the location of the restored corner and that of the corner previously restored or re-established.


John Dunn established this corner in December 1846.

Fred A Holden was at this corner, in June 1899, during a survey in Section 19. He shows that he marked two new ties. This survey was recorded by Hamilton La Rue, County Surveyor.

CSR 1799 in Section 19, shows two ties being marked at this corner. There is no date or name, but the ties are the same as shown in Holden's survey.



## RECORD OF DURABLE WITNESS MONUMENTS

NO	DESCRIPTION	BEARING	DISTANCE
1	Set 3/4" x 18" Iron Rod 1' South of a 14" Maple	N 15°33'38" E	49.82'
2	Set 3/4" x 18" Iron Rod In Fence Line	N 87°29'22" E	44.19'
3	Set 3/4" x 18" Iron Rod In Fence Line	S 01°34'23" E	51.50'
4	Set 3/4" x 18" Iron Rod 1' North of a 12" Elm	N 79°21'50" W	67.63'

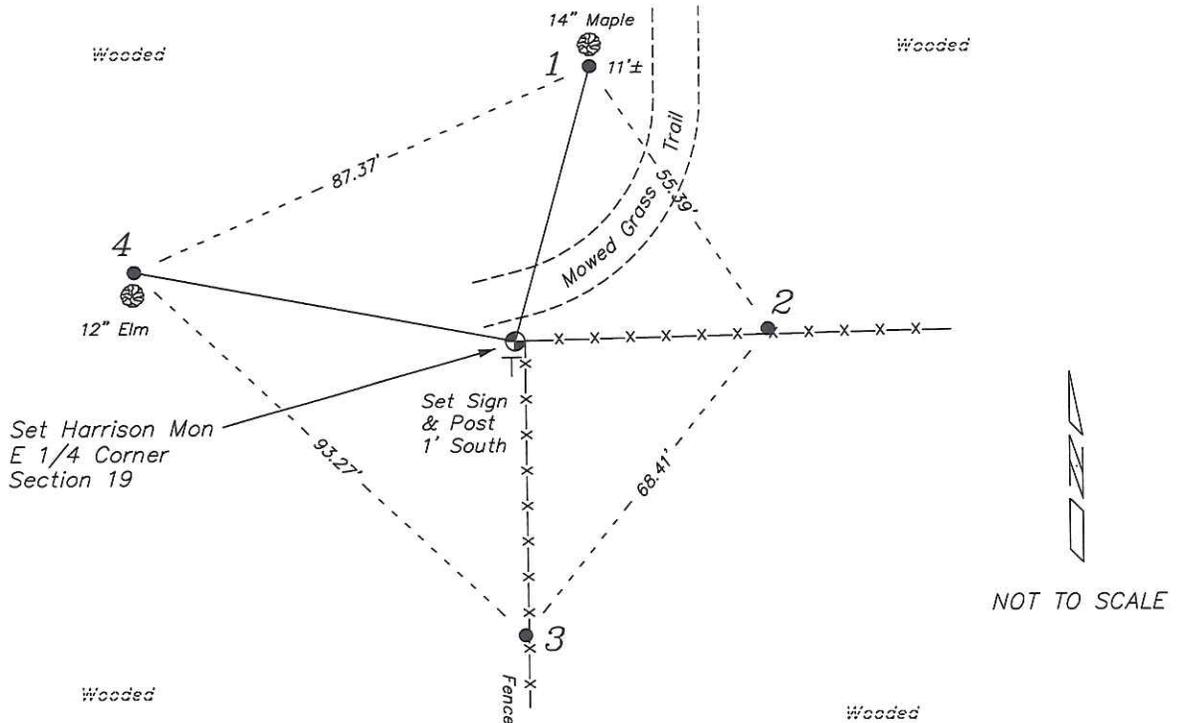

## PLAN VIEW DRAWING OF REFERENCE TIES

Map Showing Distance And Direction To Other Public Land Survey  
Corners Used For Re-Establishing The Corner

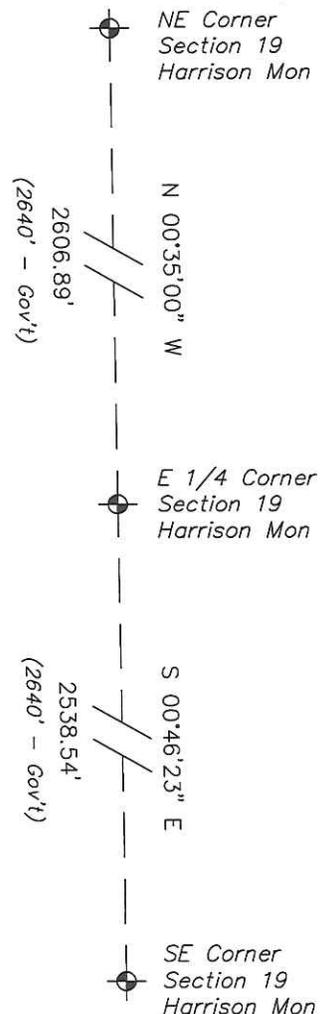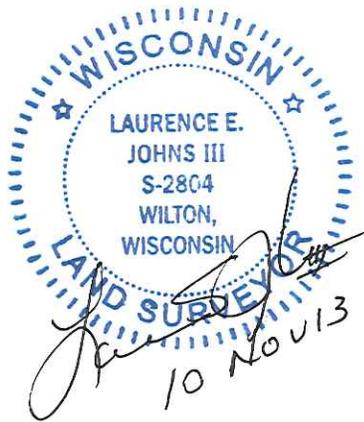

I, Laurence E Johns III RLS 2804, Registered Land Surveyor, hereby certify that the corner location shown on this record was determined by me or under my direction and control, and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Laurence E Johns III RLS 2804  
 Eagle Ridge Surveying, LLC  
 PO Box 213  
 Wilton, Wisconsin  
 10 November 2013