


CERTIFICATE

UPDATED
CERTIFIED LAND CORNER

No. 89
Page 2

2190120000



H. A. Sime and Associates
P. O. Box 705
Tomah, Wisconsin 54660
Phone: (608)-372-5392

I, Bryan H. Meyer, do hereby certify that on the 21st day of October 19 91, I found (evidence) ~~of the~~ of the Southeast corner of Section 20, T 19 N, R 1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 23rd day of Oct. 19 91.
Bryan H. Meyer
Deputy County Surveyor

History of corner establishment since Original Government Survey

Gary Sime established this corner in October 1977 and set a cast iron Harrison marker.

Description of corner evidence found:

I found Sime's Harrison, now down 6", with a sign on the West side of it. The 24" White Oak that Sime shows is broken off and is now a rotting stump. Obtained additional ties as shown below.


COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Crew: Meyer, Kenworthy
Date: October 21, 1991 - 3:00 p. m.
Weather: Sunny, 65°±
Witnesses to corner location:


John Kenworthy

Bryan H. Meyer

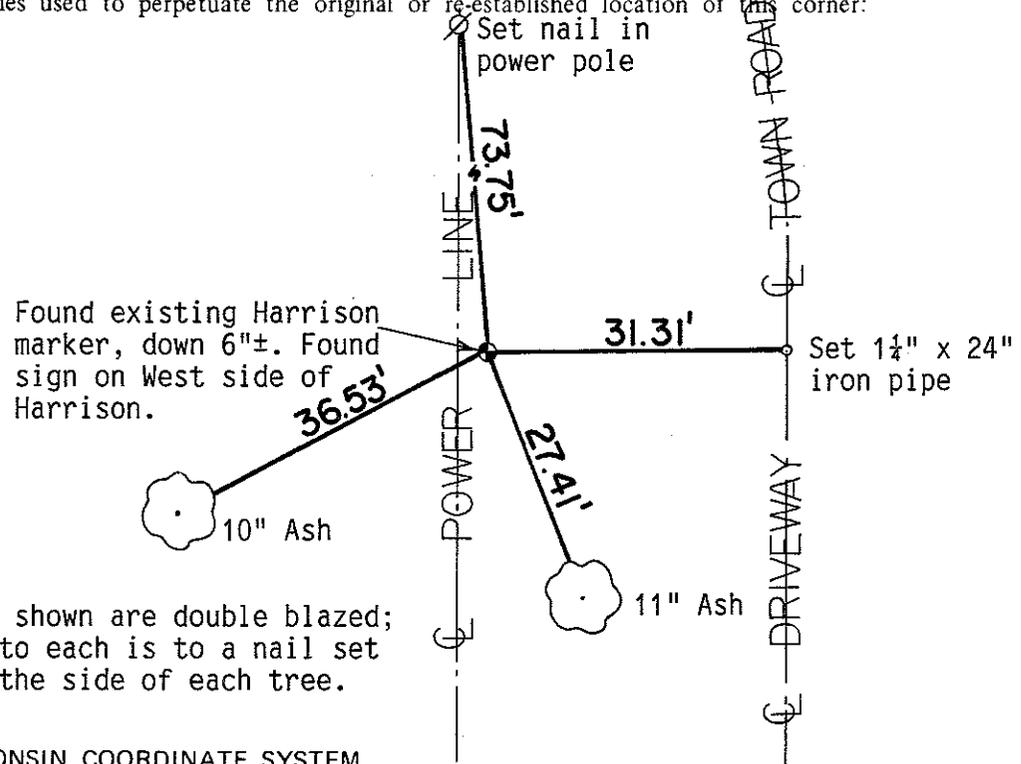

Found existing Harrison marker, down 6"±. Found sign on West side of Harrison.

The Ash trees shown are double blazed; the distance to each is to a nail set in a hack in the side of each tree.

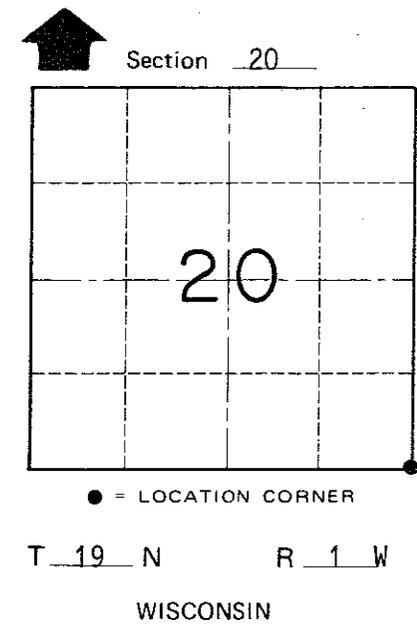

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City/Village of~~ Town of Lincoln

County of Monroe

I, Garold A. Sime, do hereby certify that on the 25th day of October 19 77, I found (evidence) (no evidence) of the S.E. corner of Section 20, T 19 N, R 1 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 15th day of Nov. 19 77.

~~Garold A. Sime, R.L.S. 1261~~
~~Crew Chief, County Surveyor's Office~~

History of original corner establishment:

Description of corner evidence found:


Used the projection of fence lines to establish corner, after establishing same I found the White Oak mentioned below. This MAY have been the original Bearing Tree, but Mr. Hoag didn't know anything about the tree, the distance to the tree fit within 2' more or less of the original tie. For economical reasons I left the corner where I originally established same. Due to the terrain in area the distance the corner would move if it was ever found that the tree was the original bearing tree the difference would be minimal.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Set Harrison, up 2"

Witnesses to corner location:

G. A. Sime Garold A. Sime R.L.S.
 C. Pietz

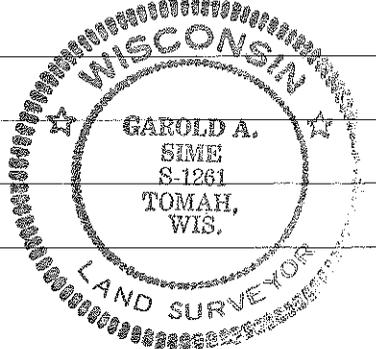

-x-x-

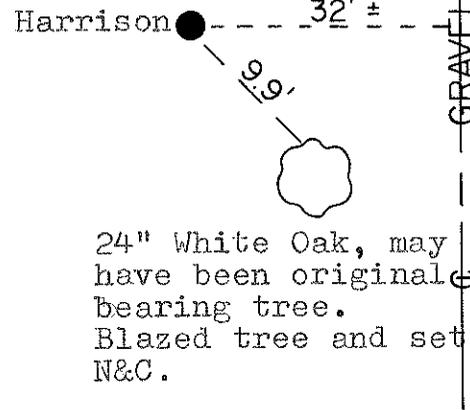


24" White Oak, may have been original bearing tree. Blazed tree and set N&C.

-x-x-

North



This Harrison is the SE corner of C.S.M. done for Mr. Gay Hoag, see same for further ties to corner.

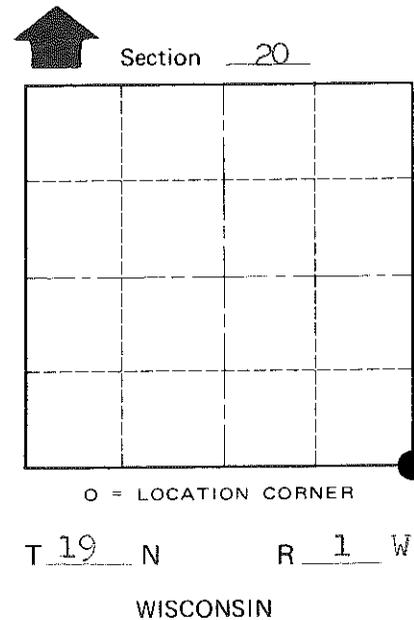

O = LOCATION CORNER

T 19 N R 1 W

WISCONSIN

Approved: Harley Sime
 County Surveyor

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Lincoln

County of Monroe

COUNTY SURVEYOR FORM NO. 1