CERTIFICATE

I, Harley A Sime do hereby certify that on the twenty- seventh day of June 19 80, I found (no evidence of the Northeast corner of Section 25, T 19 N, R 1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 26th day of Feb. 1981.

~~Harley A. Sime - R.L.S. 355~~

County Surveyor-Monroe County, Wisconsin.

Title

CERTIFIED LAND CORNER

No. 81

21901240000

History of corner establishment since Original Government Survey

Fred Holden shows an iron thimble at this corner in his notes of June, 1901, and January, 1902. Kennedy was at this corner in the late 1930's.

Description of corner evidence found:

Set the corner 2640 feet North of the E1/4 corner and on line with the E1/4 and SE corners. This location fits very well the evidence I found and measurements I made in all four cardinal directions. The existing iron bar that was replaced was a survey point set by Jung. The thimble could not be found.

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Gary Dechant

Chuck Dade

William C. Jung

William C. Jung, R.L.S. 1323

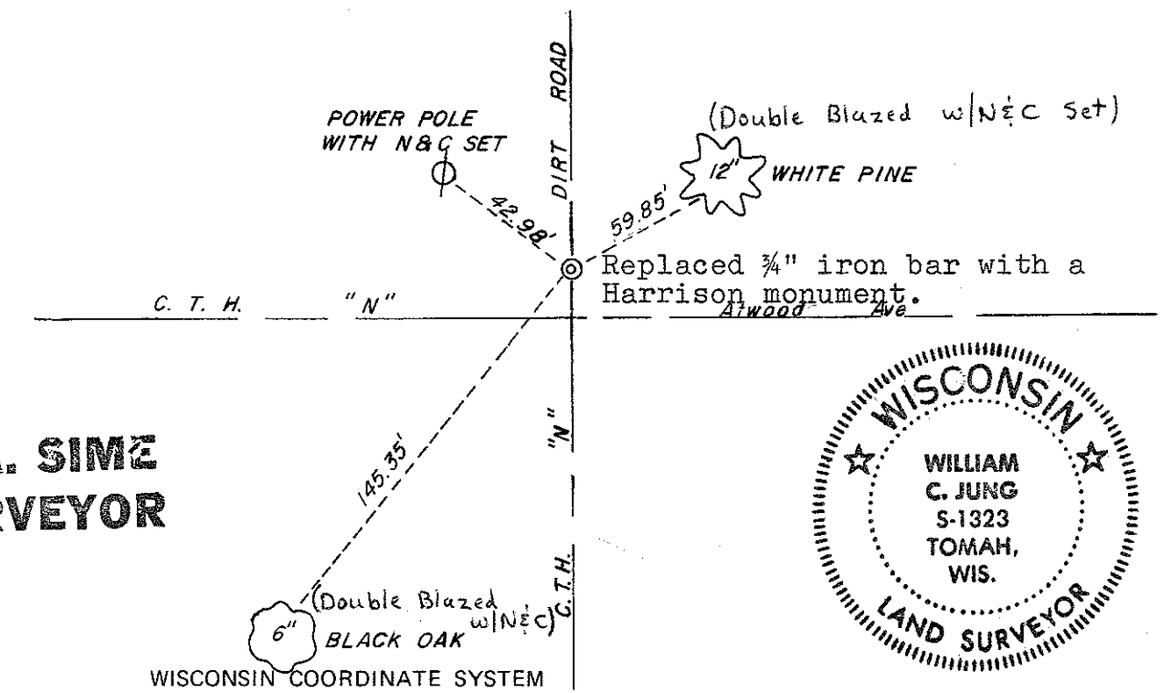

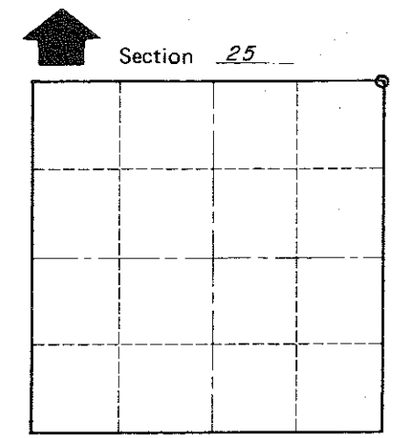

O = LOCATION CORNER

T 19 N R 1 W

WISCONSIN

WISCONSIN WILLIAM C. JUNG S-1323 TOMAH, WIS. LAND SURVEYOR

Approved: HARLEY A. SIME
MONROE CO. SURVEYOR

SURVEY CONTROL ORDER

Horizontal	
Vertical	

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village of~~ Town of Lincoln

County of Monroe

Wisconsin