

CERTIFICATE

CERTIFIED LAND CORNER

No. 131

**21901310000**

I, Harley A. Sime, do hereby certify that on the 15th day of November 1974, I found ~~(evidence)~~ (no evidence) of the Southeast corner of Section 31, T19 N, R 1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of original corner establishment:

In June of 1908 Fred Holden (County Surveyor) set a stone at this corner. An effort was made to recover this stone, but proved to be unsuccessful.

Description of corner evidence found:

An existing North-South fence was used, which fit record distances pretty well. The corner was set in this fence line and on line between the S1/4 corner of Section 32 and the S.W. corner of Section 31, resulting in a common agreement between present conditions and old records.

Dated this 3rd day of March 1976.

County Surveyor  
Title

**Approved: HARLEY A. SIME**  
**MONROE CO. SURVEYOR**


Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set a Harrison marker, up 3".

Witnesses to corner location:


K. Pritzlaff-Crew Chief

A. Lueck

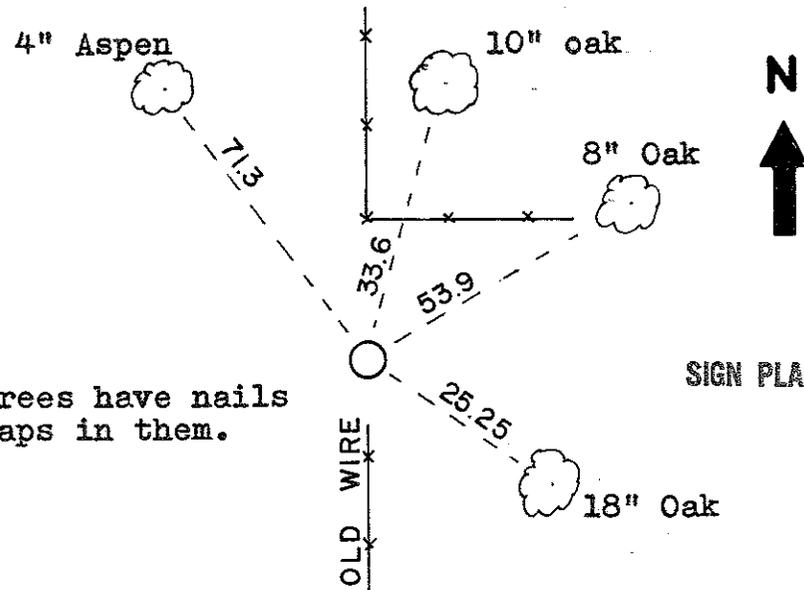

Note: All trees have nails and caps in them.

SIGN PLACED 4-22-91

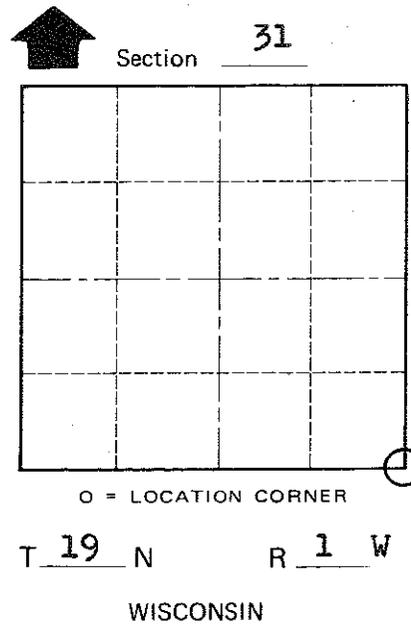

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Lincoln  
County of Monroe