

2190210000



I, Bryan H. Meyer, do hereby certify that on the 18<sup>th</sup> day of August 1983, I found (evidence) ~~██████████~~ of the Southeast corner of Section 10, T 19 N, R 2 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 22nd day of Dec. 1983.

Bryan H. Meyer  
Deputy County Surveyor  
Title

History of corner establishment since Original Government Survey

Fred Holden was here in April of 1902 and apparently set a stone with an "X" mark. Mr. Holden was here again in May of 1908. C. M. Keach was here in November of 1914 and found Holden's stone.

Description of corner evidence found:

I found Mr. Holden's stone with "X" mark and an "S" clearly visible on top. The stone is 30'+ South of a 3-way fence corner. I also found Mr. Holden's White Oak bearing tree alive and well (now a 17") and the remains of his Black Oak bearing tree stump.

COUNTY SURVEYOR FORM NO. 1


Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Crew: Meyer, Wilhite  
Date: August 18, 1983  
Weather: P. Cloudy, Humid, 85°±.  
Witnesses to corner location:

Bryan H. Meyer


Dallas Wilhite

APPROVED: Harley A. Sime  
Monroe County Surveyor

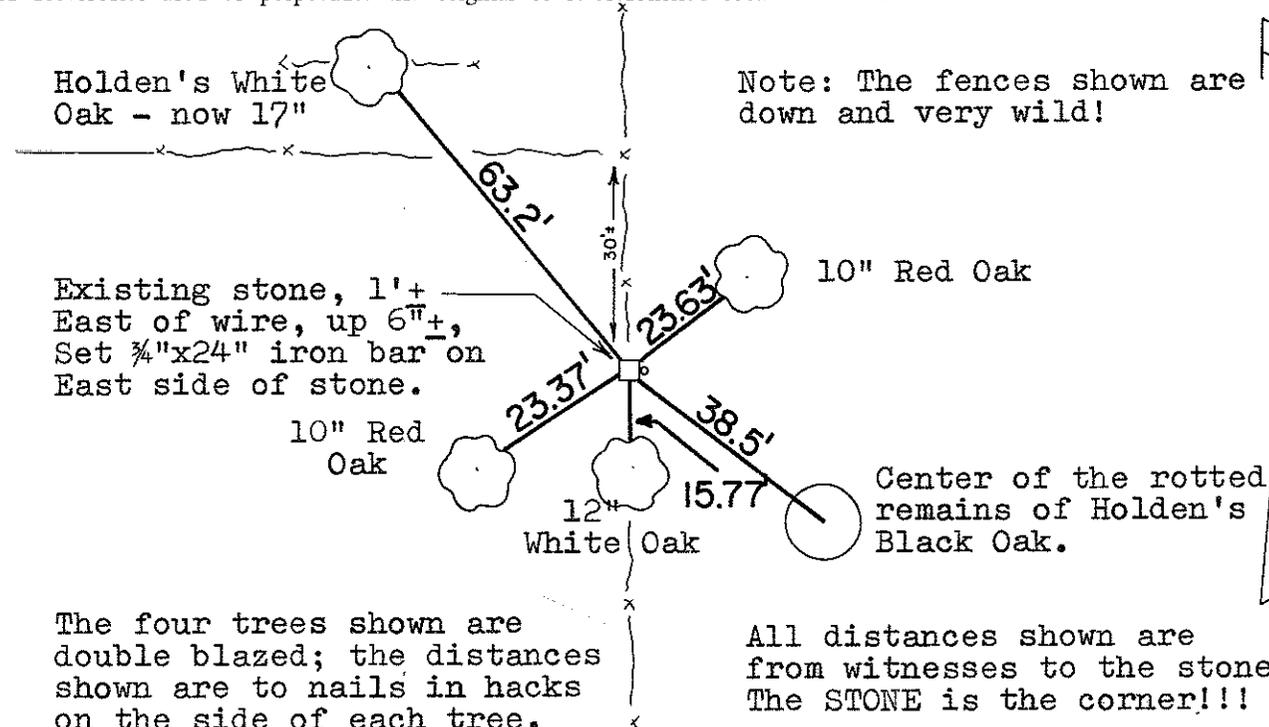

The four trees shown are double blazed; the distances shown are to nails in hacks on the side of each tree.  
WISCONSIN COORDINATE SYSTEM

All distances shown are from witnesses to the stone. The STONE is the corner!!!

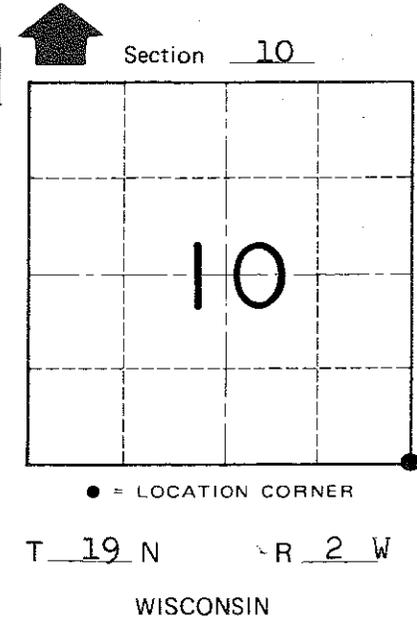

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town of Grant  
County of Monroe