

21902340020

I, William C. Jung, do hereby certify that on the 11th day of September 1982, I found (evidence) ~~(no evidence)~~ of the South 1/4 corner of Section 34, T 19 N, R 2 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 25th day of Feb. 1983

William C. Jung

Deputy County Surveyor

Title

History of corner establishment since Original Government Survey

Fred Holden was at this corner in August and September of 1911. He set an iron buggy axle at the corner. In September of 1981 Parish found Holden's buggy axle and set a Harrison by it.

Description of corner evidence found:




I found Holden's buggy axle. On the West side of the axle is a Harrison. The Harrison is a witness marker.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

William Jung

Bryan Meyer

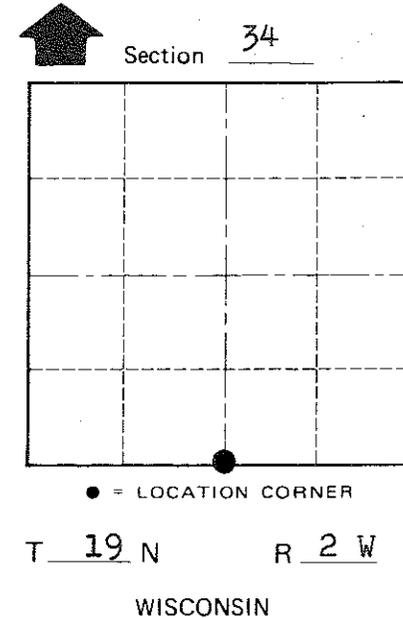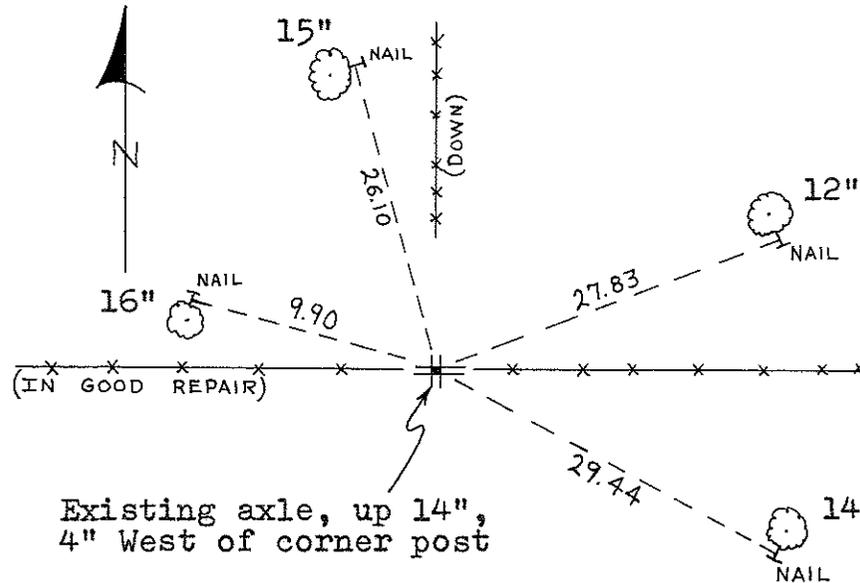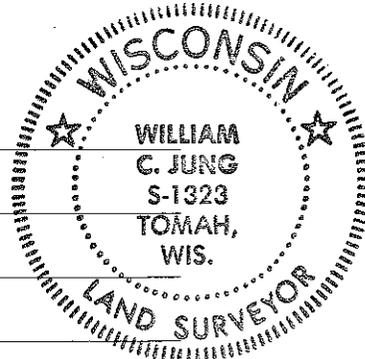

Approved: **HARLEY A. SIME**
MONROE CO. SURVEYOR

SURVEY CONTROL ORDER

Horizontal _____
Vertical _____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

Note: All the bearing trees are double blazed Black Oaks. Each distance is to a nail in a hack on the side of the tree.

~~City, Village~~ or Town Grant
County of Monroe

COUNTY SURVEYOR FORM NO. 1