

**CERTIFICATE**

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

**CERTIFIED LAND CORNER**

**History of corner established since Original Government Survey**

In November of 1983 William Jung set a Harrison monument by single proportionate measurement using the northeast corner of Section 1 and the computed southeast corner of Section 1. The southeast corner is under water and inaccessible. Jung also noted that the monument is not in the correct position. It should be 0.20 foot west of the monument center due to a downed log.

**Description of evidence found**

On November 29th, 2012, Anderson Engineering of Minnesota located the Harrison monument flush with the ground and 0.8 feet northwest of a 4 inch square wood post. The post had a US Government no trespassing sign on the west side and a surveyor section corner sign on the east side.

No. 21903012000



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

**TRUE CORNER LOCATION**



Northing (Y) 455166.81  
Easting (X) 662916.88

**HARRISON MONUMENT**

Northing (Y) 455166.81  
Easting (X) 662917.08

Base Station - 22 182W

Northing (Y) 408053.25  
Easting (X) 679287.00

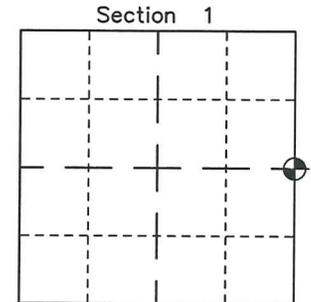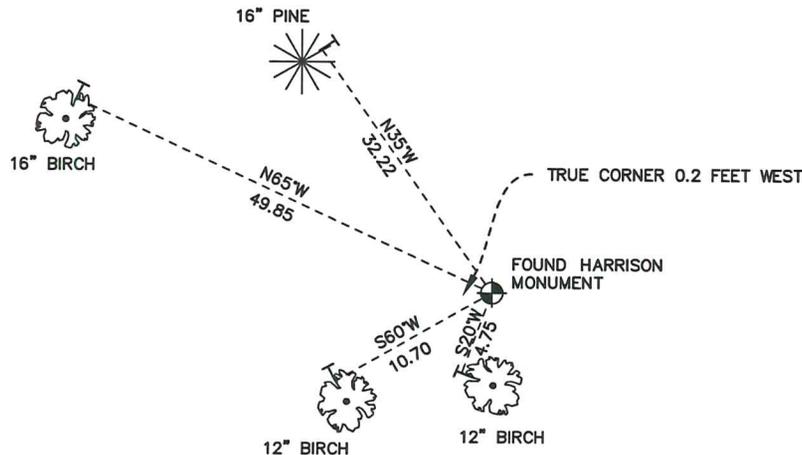

● = LOCATION CORNER  
Corner I.D. E 1/4 1  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

21903012000

I, William C. Jung, do hereby certify that on the 11th day of November 1983, I found ~~evidence~~ (no evidence) of the East 1/4 corner of Section 1, T 19 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 23rd day of Nov. 1983.

William C. Jung

Deputy County Surveyor, R.L.S. 1323

History of corner establishment since Original Government Survey

Nothing on record since the original government survey. David Blencoe found nothing at this corner, nor did the surveyors from Camp McCoy in World War II.

Description of corner evidence found:

The corner was set by single proportionate measurement using the existing monument at the NE section corner and the computed corner at the SE section corner. The SE section corner is now under water and as such is inaccessible.

COUNTY SURVEYOR FORM NO. 1


Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner

Witnesses to corner location:



William C. Jung

Witness: Dick Abbs

Approved: HARLEY A. SIME MONROE CO. SURVEYOR

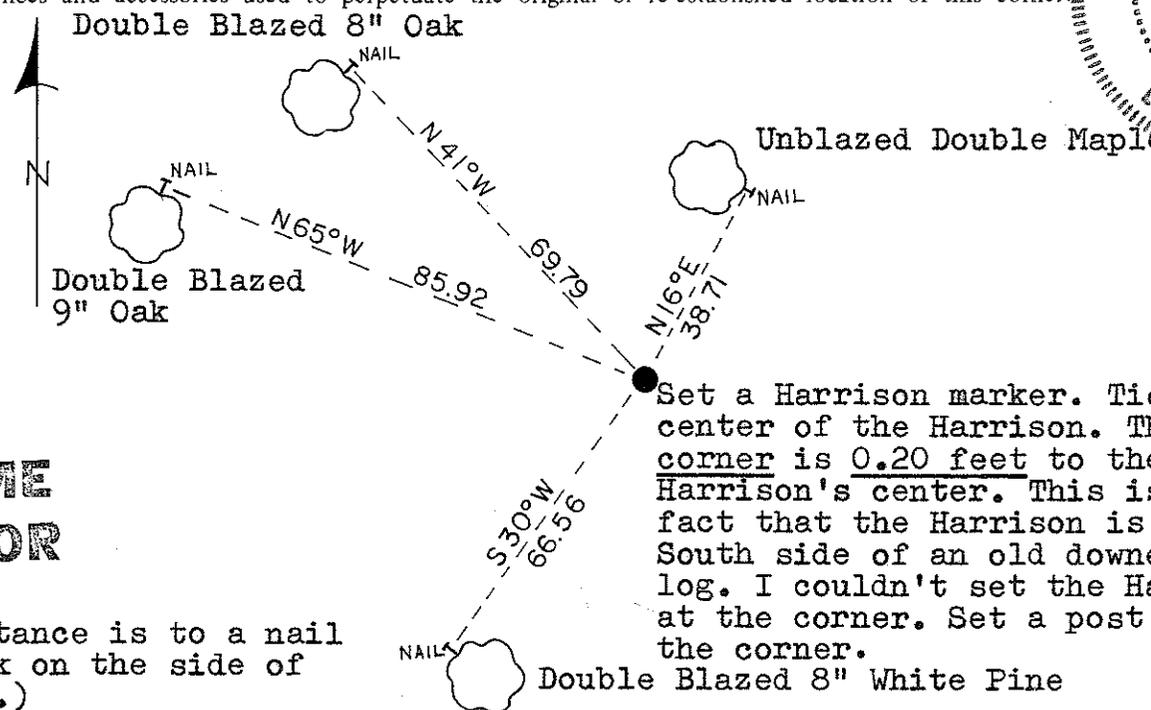

Set a Harrison marker. Ties are to the center of the Harrison. The actual corner is 0.20 feet to the West of the Harrison's center. This is due to the fact that the Harrison is set on the South side of an old downed decaying log. I couldn't set the Harrison exactly at the corner. Set a post and sign by the corner.

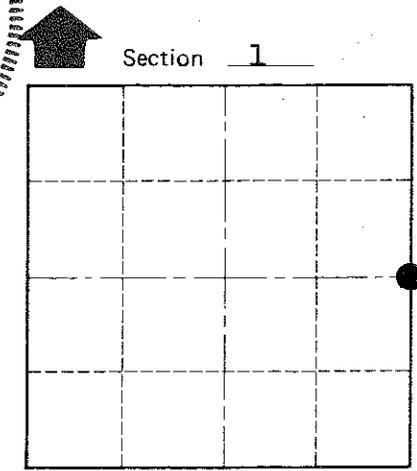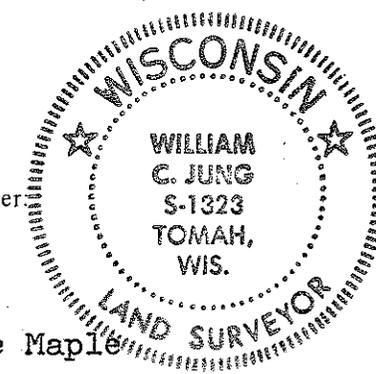

• = LOCATION CORNER

T 19 N R 3 W

WISCONSIN

SURVEY CONTROL ORDER

Table with 2 rows: Horizontal, Vertical

(Each distance is to a nail in a hack on the side of the tree.)

WISCONSIN COORDINATE SYSTEM

Table with 5 columns: Corner, East (X), North (Y), Elevation (Z), Zone

City, Village or Town New Lyme County of Monroe Wisconsin