

CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

History of corner established since Original Government Survey

The 1940's McCoy boundary notes show a corner at this location. In October of 1981 Harley A. Sime found and accepted a McCoy marker as the corner.

Description of evidence found

On August 7th, 2012, Anderson Engineering of Minnesota located the McCoy monument, a 4 inch U.S. Army Corps of Engineers survey control mark disk set in concrete 10 inches below the grade of the bituminous road.

No. 21903030000



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Nick Hillmer
Josh Oslund
Dan Greenwald



MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

MCCOY MONUMENT
Northing (Y) 452633.42
Easting (X) 652337.56

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00



All distances are shown in U.S. Survey Feet.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

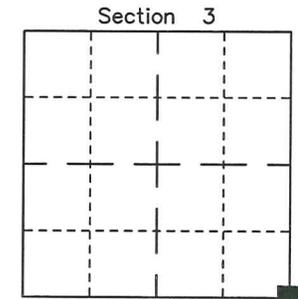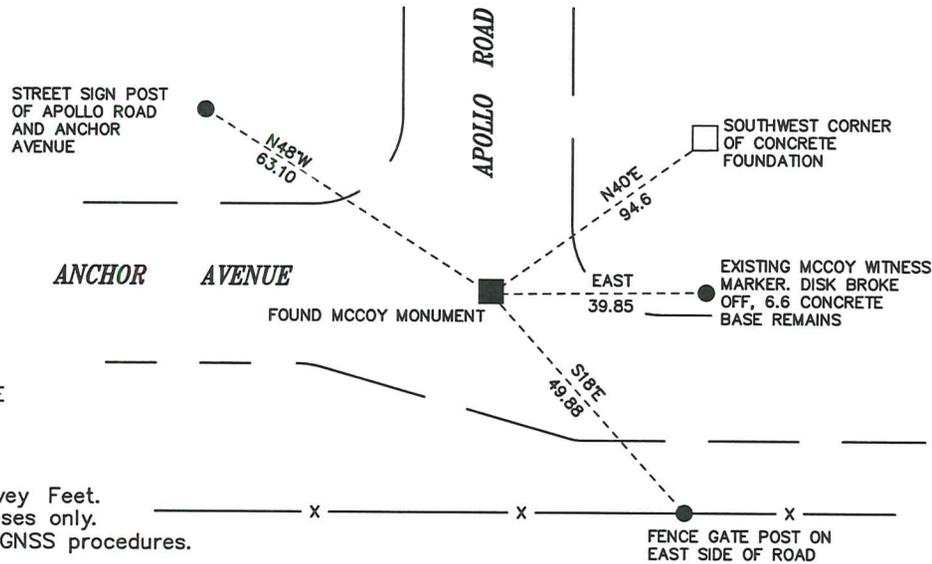

■ = LOCATION CORNER
Corner I.D. SE 3
T 19 N R 3 W
Town of New Lyme
Monroe County, WI.

21903030000

I, Harley A. Sime, do hereby certify that on the 15th day of October 1981, I found (evidence) ~~(evidence)~~ of the SE corner of Section 3, T 19 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 30th day of Oct. 19 81.

Harley A. Sime, R.L.S. 355

County Surveyor
Title

History of corner establishment since Original Government Survey
 surveyors
 McCoy set a concrete marker with a brass cap here in the McCoy Boundary survey of 1945. They also show reference markers. H.A.Sime found these markers in 1960. The Town Road Records of May, 1898, show the road as being on the North-South section line at this point. The Town Road Records of April, 1910, show that the road going to the West begins at this section corner. The Town Road records also show that the road going to the East was opened in ***
 Description of corner evidence found:
 We found the McCoy marker and the reference markers. Accepted as corner and ties were taken.

*** September of 1961 and discontinued in May of 1979.



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

G. Dechant

B. Meyer

C. Pietz

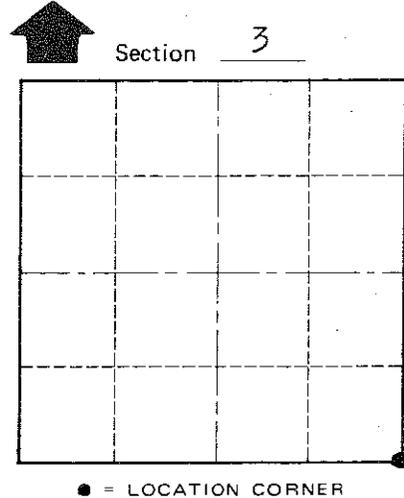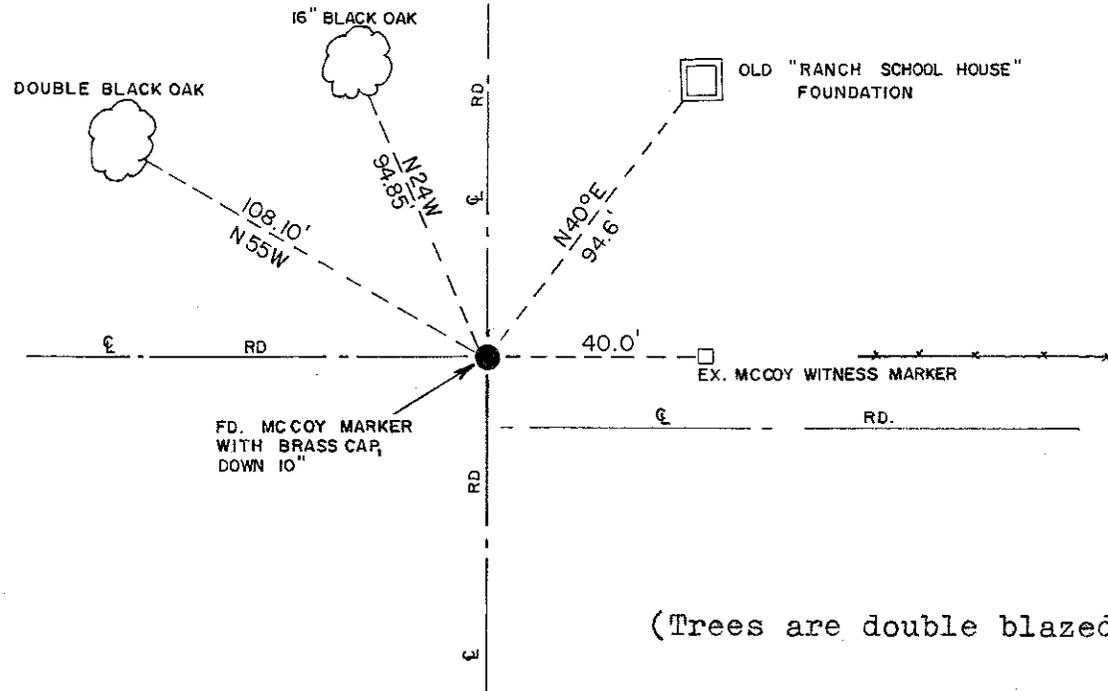

T 19 N R 3 W

WISCONSIN

(Trees are double blazed with nails set)

Approved: **HARLEY A. SIME**
MONROE CO. SURVEYOR

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town New Lyme
 County of Monroe

COUNTY SURVEYOR FORM NO. 1