

CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

History of corner established since Original Government Survey

The 1910 town road records show the road being on the section line. On October 20th, 1981, Harley A. Sime set a Harrison monument by single proportionate measurement and recorded ties to bearing trees. The marker was set two feet south of the south edge of pavement.

Description of evidence found

on August 8th, 2012, Anderson Engineering of Minnesota located the Harrison monument just below the grade of the road shoulder and 2.5 feet south of the south edge of pavement.

No. 21903030020



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:



Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 452606.81
Easting (X) 649694.97

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

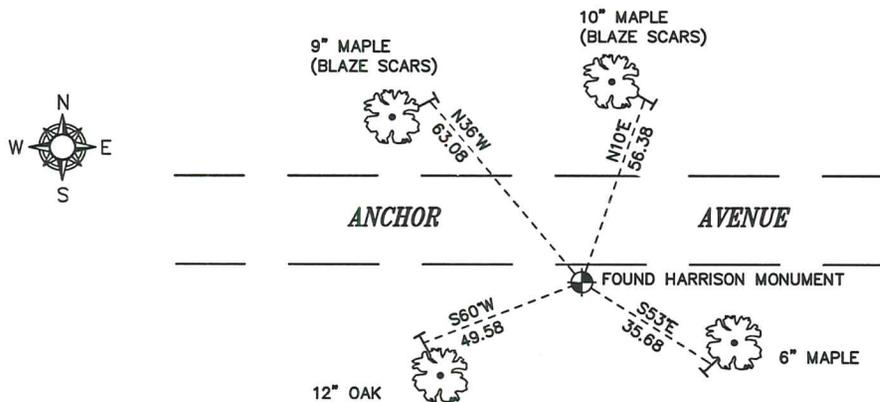

⊕ = LOCATION CORNER
Corner I.D. S 1/4 3
T 19 N R 3 W
Town of New Lyme
Monroe County, WI.

CERTIFICATE

CERTIFIED LAND CORNER

No. 26

21903030020

I, Harley A. Sime, do hereby certify that on the 20th day of October 1981, I found ~~(evidence)~~ (no evidence) of the S $\frac{1}{4}$ corner of Section 3, T 19 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of corner establishment since Original Government Survey

The Town Road Records of April, 1910, show the road being on the section line at this point.

Description of corner evidence found:

Set by single proportionate measurement.

Dated this 29th day of Oct. 1981.

Harley A. Sime, R.L.S. 355


County Surveyor
title

COUNTY SURVEYOR FORM NO. 1


Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

G. Dechant
B. Meyer
C. Pietz

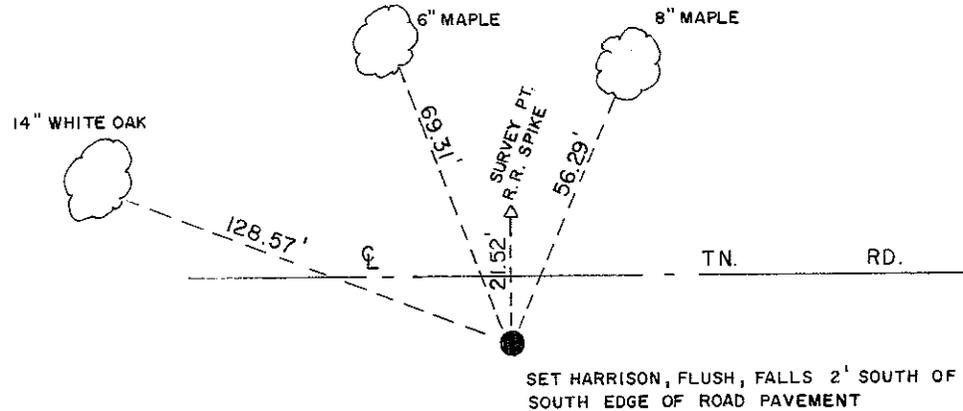

(Trees double blazed with nails set)

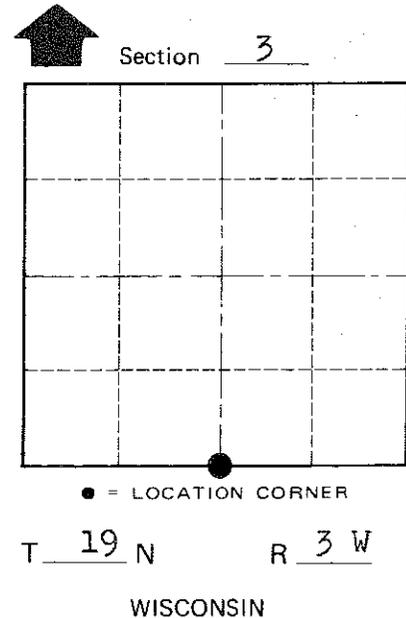

Approved: HARLEY A. SIME
MONROE CO. SURVEYOR

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

SIGN PLACED 11-15-91

~~City, Village or~~ Town New Lyme
County of Monroe