

I, Garold A. Sime, do hereby certify that on the 14th day of November 1991, I found ~~(XXXXXX)~~ (no evidence) of the E 1/4 corner of Section 4, T 19 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 14th day of Nov. 1991.

Garold A. Sime

Monroe County Surveyor
Title

History of corner establishment since Original Government Survey

Fred Holden may have set a stone at this corner in his survey dated Sept. 17th, 1991.

See Reverse Side For Maintenance

Description of corner evidence found:

After an extensive search of the area for Holden's stone (which was not located) I established this corner on line and by single proportionate measurement between existing section corners.


Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set a 2 1/2" x 7' iron pipe at corner.

Witnesses to corner location:

Garold A. Sime, R.L.S.

John Kenworthy






SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

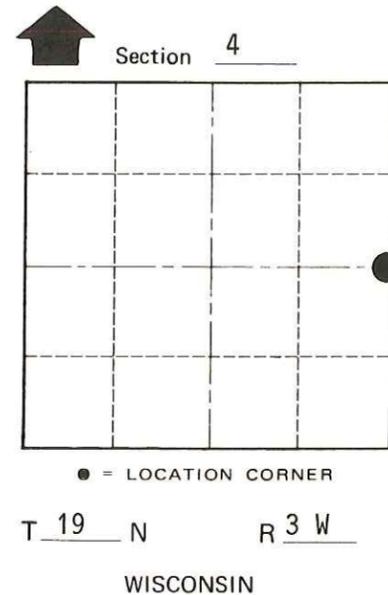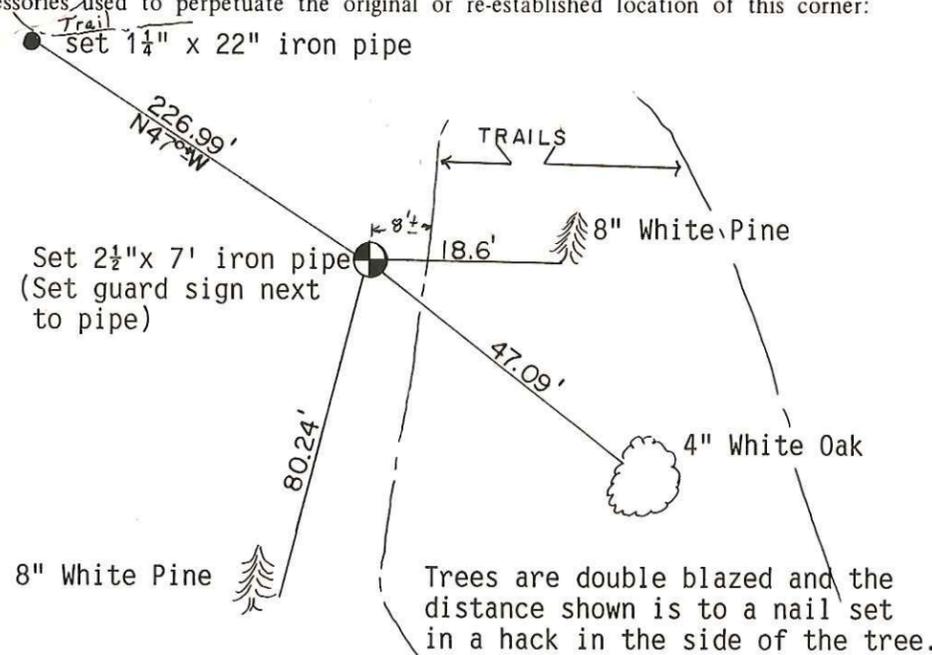

~~XXXXXX~~ or Town of New Lyme
County of Monroe

COUNTY SURVEYOR FORM NO. 1