

R/4 S,
T19N-R3W



21903052000

I, Garold A. Sime, do hereby certify that on the 30th day of December 19 91, I found (evidence) ~~(no evidence)~~ of the E 1/4 corner of Section 5, T 19 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 30th day of Dec. 1991.

Garold A. Sime

Monroe County Surveyor
Title

History of corner establishment since Original Government Survey

C.M. Keach set a stone at this corner in October of 1902 off of the Original bearing tree.

Description of corner evidence found:

After much searching we could not find Keach's stone. I set this corner off of the Original Bearing Tree Stump that is still here.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set Cast Iron T.C.P. Monument at corner
Set Guard sign next to corner


Witnesses to corner location:

Garold A. Sime, R.L.S.


John F. Kenworthy



COUNTY SURVEYOR FORM NO. 1

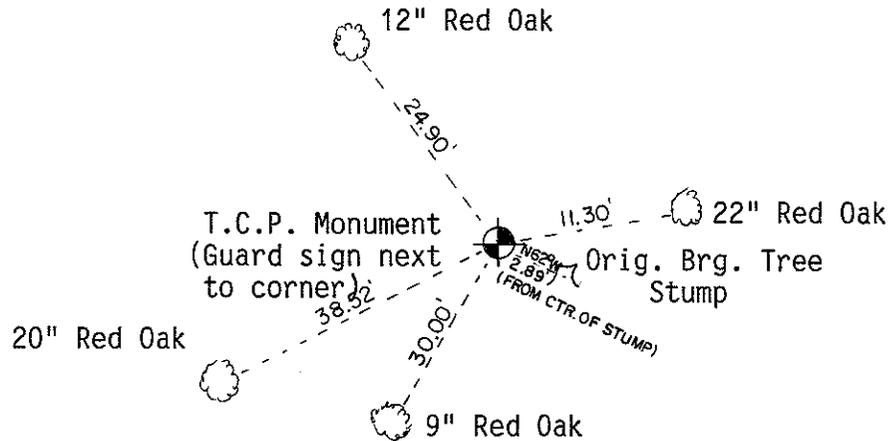

Trees are double blazed and the distance shown is to a nail set in a hack in the side of the tree.

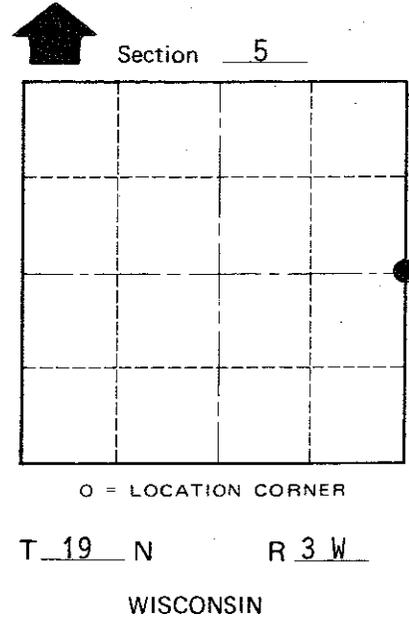

SURVEY CONTROL ORDER

Horizontal _____
Vertical _____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town of New Lyme

County of Monroe