

CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER


History of corner established since Original Government Survey

The 1940's McCoy boundary notes show a corner at this location.
On October 20th, 1981, Harley A. Sime found and accepted the McCoy boundary marker as the corner.

Description of evidence found

On August 8th, 2012, Anderson Engineering of Minnesota located the McCoy monument, a 4 inch U.S. Army Corps of Engineers survey control mark disk set in concrete. The area has recently been clear cut. No prior bearing trees were found.

No. 21903090000

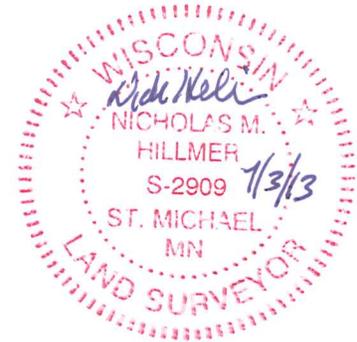

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:



Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

MCCOY MONUMENT
Northing (Y) 447294.17
Easting (X) 647036.90

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

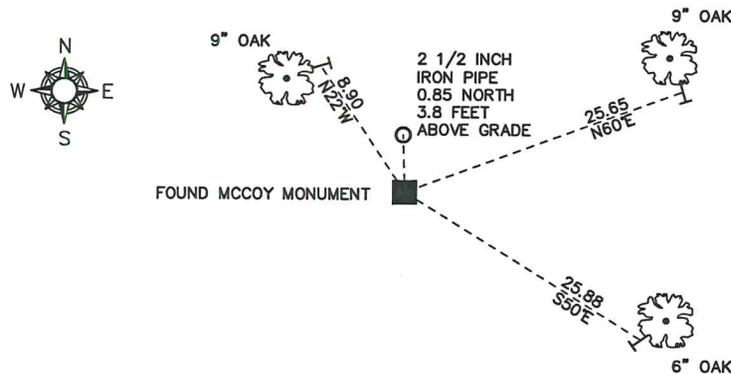

■ = LOCATION CORNER
Corner I.D. SE 9
T 19 N R 3 W
Town of New Lyme
Monroe County, WI.

21903090000

I, Harley A. Sime, do hereby certify that on the 20th day of October 19 81, I found (evidence) (~~no evidence~~) of the NE corner of Section 16, T 19 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 30th day of Oct. 19 81.

Harley A. Sime, R.L.S. 355

County Surveyor

Title

History of corner establishment since Original Government Survey

McCoy set a concrete marker with a brass cap here during the boundary survey of 1945. **surveyors**

Description of corner evidence found:

Found the McCoy marker, accepted it as the corner as it fits other field conditions very well.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

G. Dechant

B. Meyer

C. Pietz

COUNTY SURVEYOR FORM NO. 1

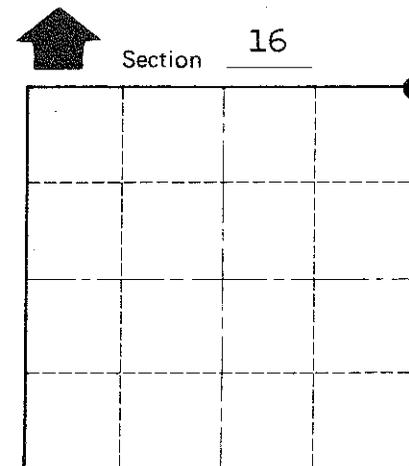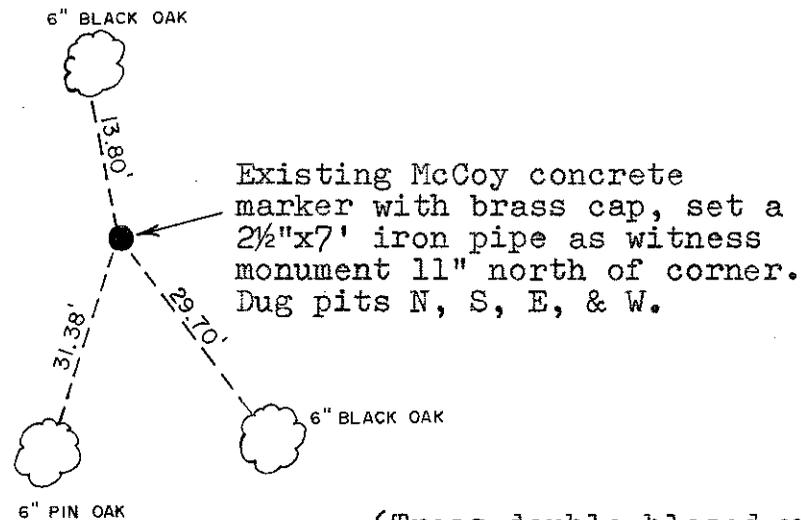

● = LOCATION CORNER

T 19 N R 3 W
WISCONSIN

**Approved: HARLEY A. SIME
MONROE CO. SURVEYOR**

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

(Trees double blazed with nails set)

~~City, Village~~ Town New Lyme
County of Monroe