


**CERTIFICATE**

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013

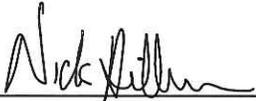

Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

**CERTIFIED LAND CORNER**


History of corner established since Original Government Survey

The 1940's McCoy boundary notes show a corner at this location. After numerous unsuccessful attempts to locate the corner, William Jung set a 1 3/8" round iron bar at a computed location that best fits the McCoy boundary survey and the original government survey.

Description of evidence found

On January 9th, 2013, Anderson Engineering of Minnesota located the 1 3/8" bar flush with the ground.

No. 21903100000

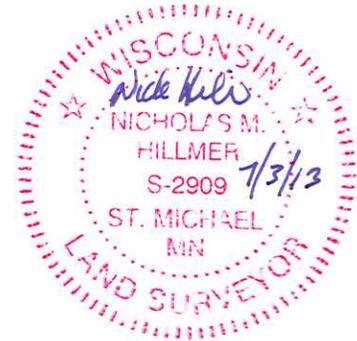

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

1 3/8 INCH IRON BAR  
Northing (Y) 447296.00  
Easting (X) 652303.98

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

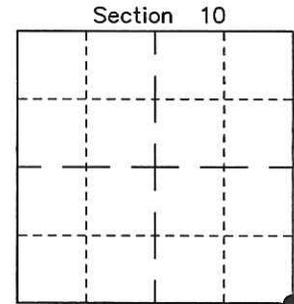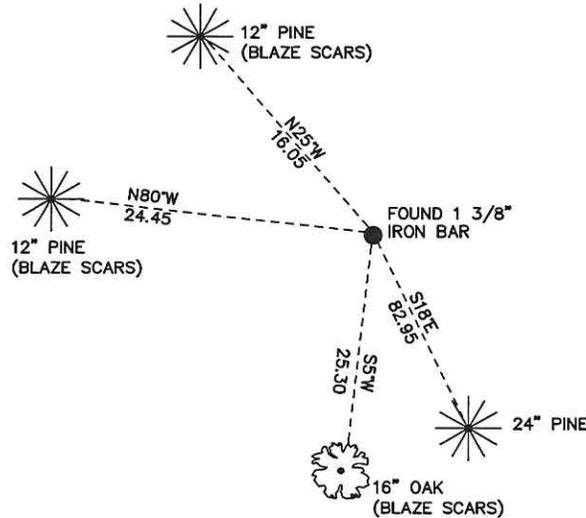

● = LOCATION CORNER  
Corner I.D. SE COR 10  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

21903100000

I, William C. Jung, do hereby certify that on the 15th day of November 1983, I found ~~(evidence)~~ (no evidence) of the Southwest corner of Section 11, T 19 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of corner establishment since Original Government Survey

The field notes of the boundary survey of Camp McCoy as surveyed during World War II show a stone at this corner.

Description of corner evidence found:

I searched the area for the stone on at least four different occasions and could not find a stone. After analyzing the recent resurvey data of Sections 10, 11, and 12, and the field notes of the Camp McCoy World War II boundary survey, I set the corner at a computed location that in my opinion best fits the old Camp McCoy boundary survey and the original government survey.

Dated this 23rd day of Nov. 1983.

William C. Jung  
Deputy County Surveyor, R.L.S. 1323  
Title

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

William C. Jung

Dennis Perrigo

Witness: Dick Abbs

COUNTY SURVEYOR FORM NO. 1

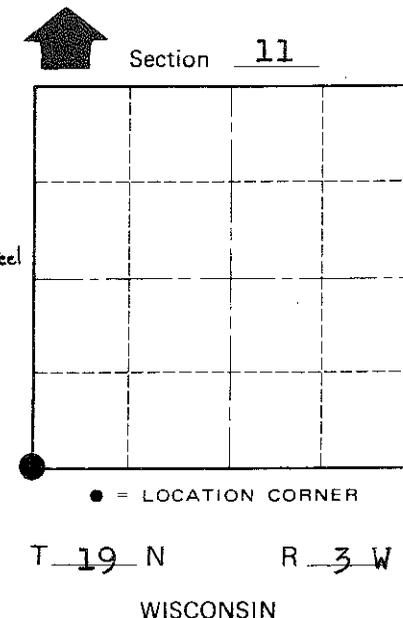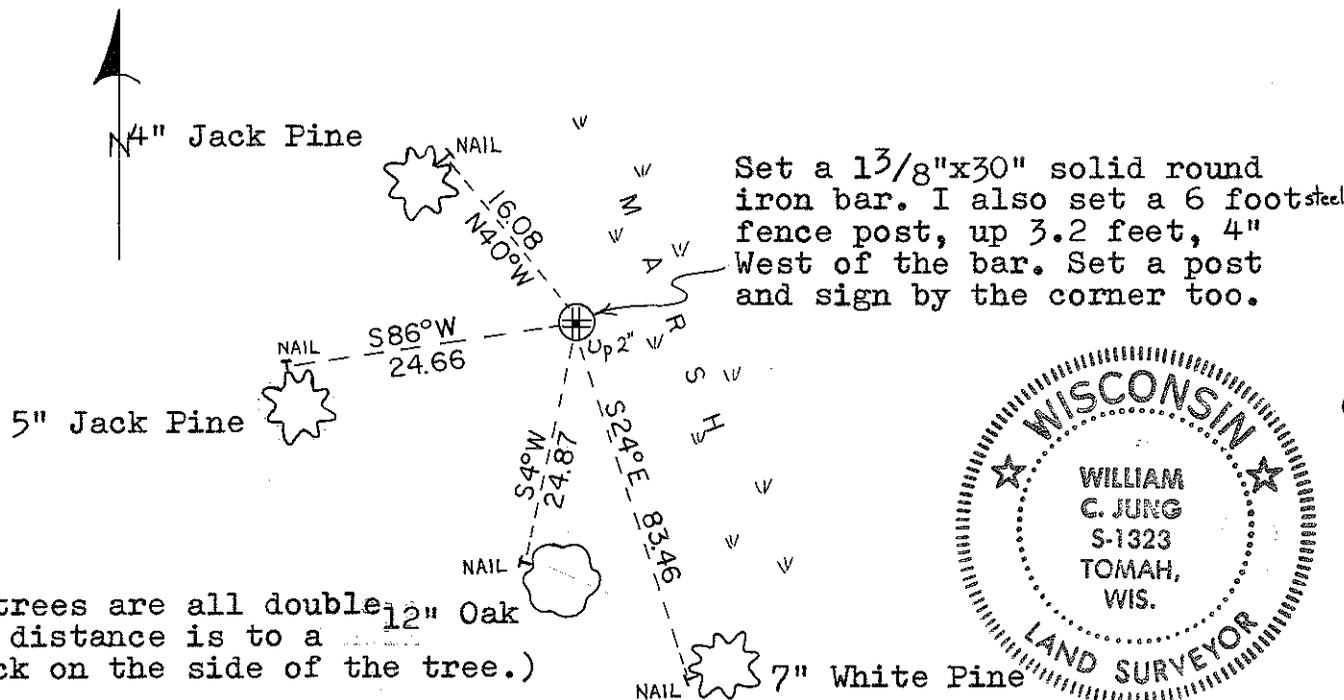

Approved: **HARLEY A. SIME**  
**MONROE CO. SURVEYOR**

SURVEY CONTROL ORDER	
Horizontal	_____
Vertical	_____

(The bearing trees are all double blazed. Each distance is to a nail in a hack on the side of the tree.)

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town New Lyme  
County of Monroe  
Wisconsin