

CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER


History of corner established since Original Government Survey

In November of 1983 William Jung set a Harrison monument at the corner by single proportionate measurement between the northeast and southeast corners of Section 12.

Description of evidence found

On August 7th, 2012, Anderson Engineering of Minnesota located the Harrison monument on the shoulder of the road 1 foot below grade. The top of the Harrison monument was missing.

No. 21903102000

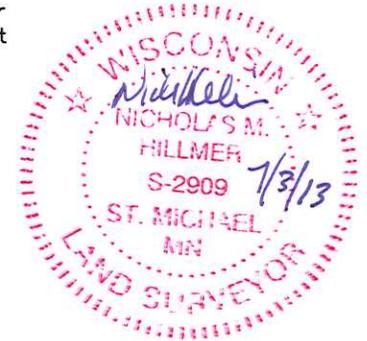

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 449964.72
Easting (X) 652320.75

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

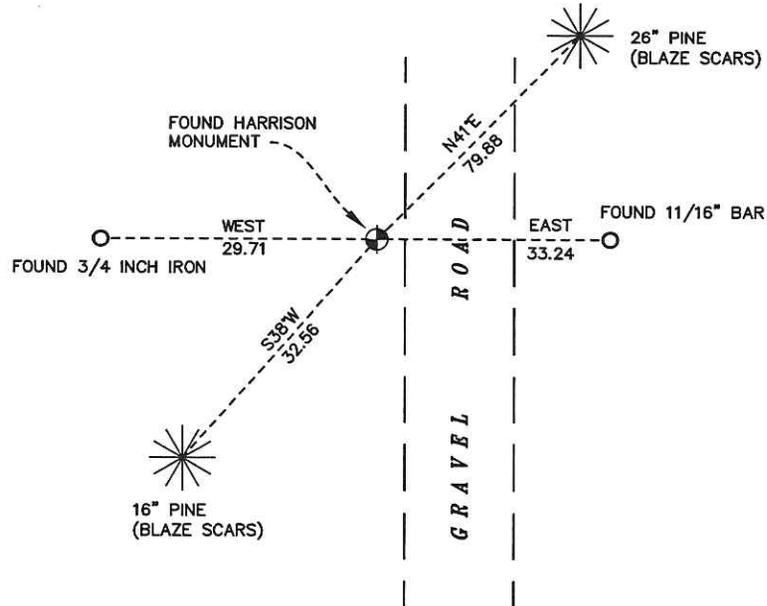

⊕ = LOCATION CORNER
Corner I.D. E 1/4 10
T 19 N R 3 W
Town of New Lyme
Monroe County, WI.

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

21903102000

I, William C. Jung, do hereby certify that on the 15th day of November 1983, I found ~~evidence~~ (no evidence) of the West 1/4 corner of Section 11, T 19 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of corner establishment since Original Government Survey

Nothing on record since the original government survey.


Dated this 17th day of Nov. 1983.

Description of corner evidence found:

The corner was set by single proportionate measurement between the NW and SW section corners.

William C. Jung

Deputy County Surveyor, R.L.S. 1323
Title

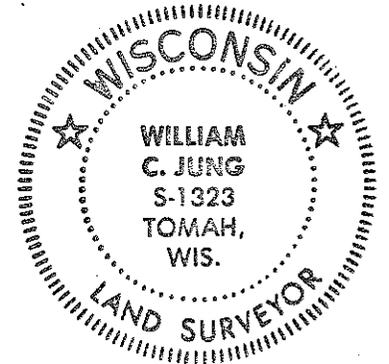

COUNTY SURVEYOR FORM NO. 1



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

William C. Jung

Dennis Perrigo

Witness: Dick Abbs

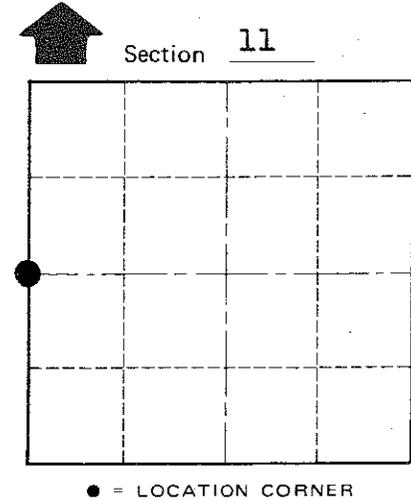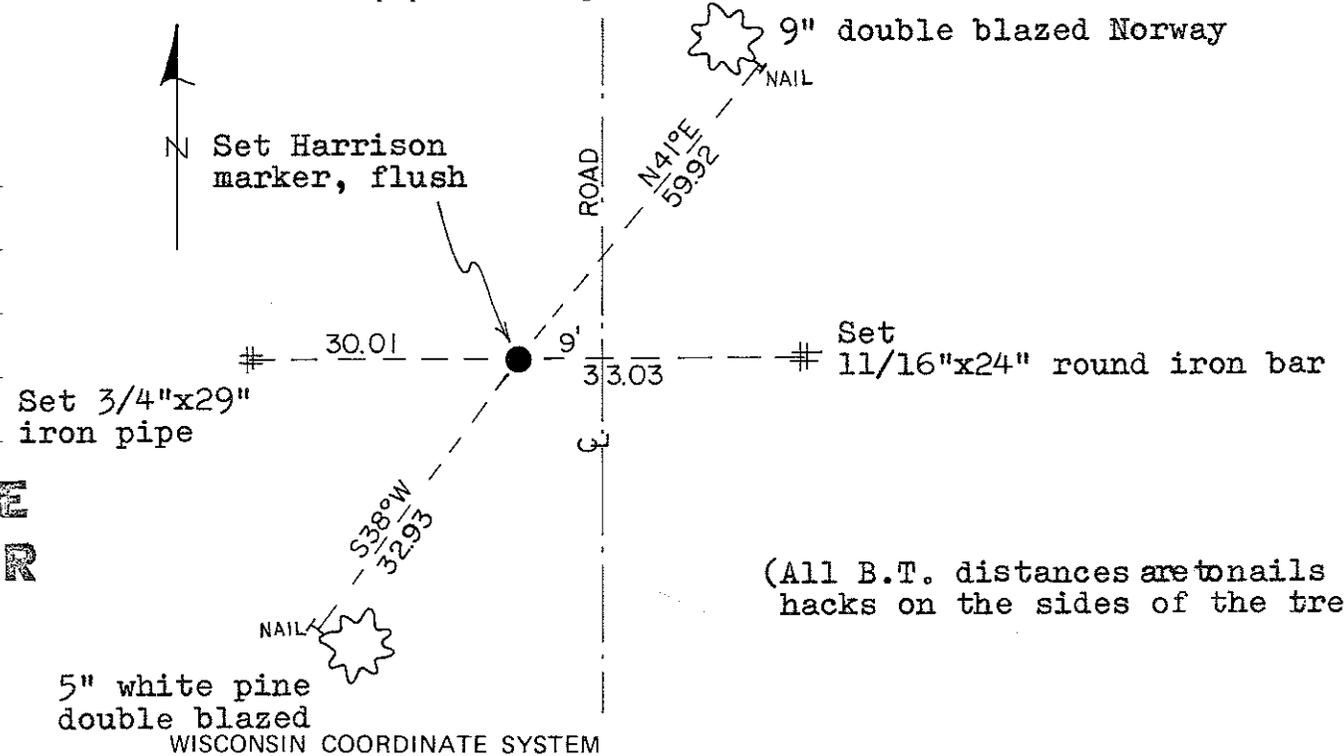

(All B.T. distances are to nails in hacks on the sides of the trees.)

Approved: **HARLEY A. SIME**
MONROE CO. SURVEYOR

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town New Lyme
County of Monroe
Wisconsin