


## CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

## CERTIFIED LAND CORNER

### History of corner established since Original Government Survey

Fred A. Holden was at this corner in October of 1901. The 1940's McCoy boundary notes show a corner at this location. William Jung found Holden's old bearing tree but did not find the stone. Jung believes the stone was torn out by equipment in the area. Jung found one of Holden's bearing trees with the number "18". Jung re-established the position from this evidence with a Harrison monument.

### Description of evidence found

On August 7th, 2012, Anderson Engineering of Minnesota located the Harrison monument 2 inches above grade and 1.4 feet northeast of a 4 inch square post with a sign.

No. 21903120000



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 447212.94  
Easting (X) 662854.88

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

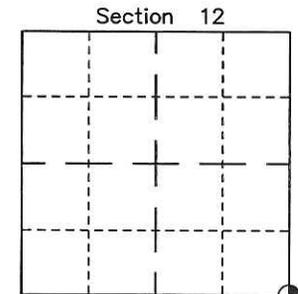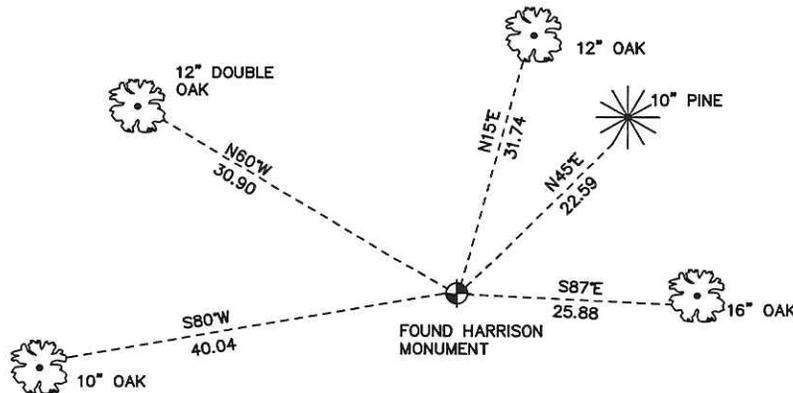

⊙ = LOCATION CORNER  
Corner I.D. SE 12  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

21903120000

I, William C. Jung, do hereby certify that on the 15th day of November 1983, I found (evidence) ~~the evidence~~ of the Southeast corner of Section 12, T 19 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 17th day of Nov. 1983.

William C. Jung

Deputy County Surveyor, R.L.S. 1323  
Title

History of corner establishment since Original Government Survey

The field notes of the boundary survey of Camp McCoy as surveyed during World War II show a stone at this corner. In October of 1901 Fred Holden was at this corner.

Description of corner evidence found:

I found Holden's old bearing tree in the Southeast quadrant. The old pine was dead, broken, and down, but the blaze was open and clear with the number "18" still readable. I reset the corner by using the old bearing tree. Since the old tree was dead, I cut it up and brought the scarred piece back to the office. I could not find the stone. I think that the stone was torn out by pulping vehicles.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:




Witnesses to corner location:

William C. Jung

Dennis Perrigo

Witness: Dick Abbs

COUNTY SURVEYOR FORM NO. 1

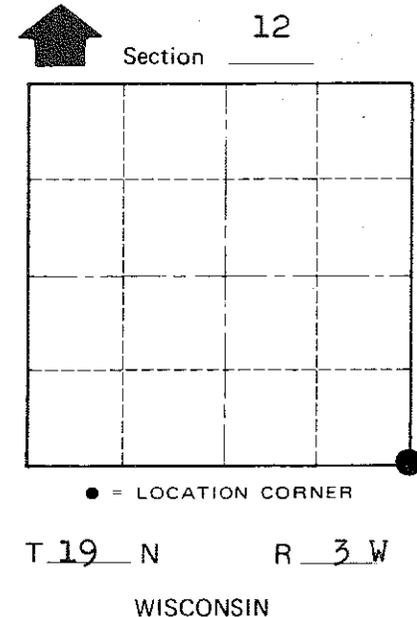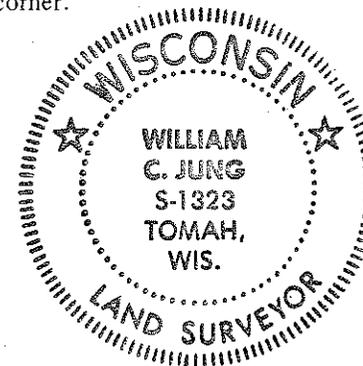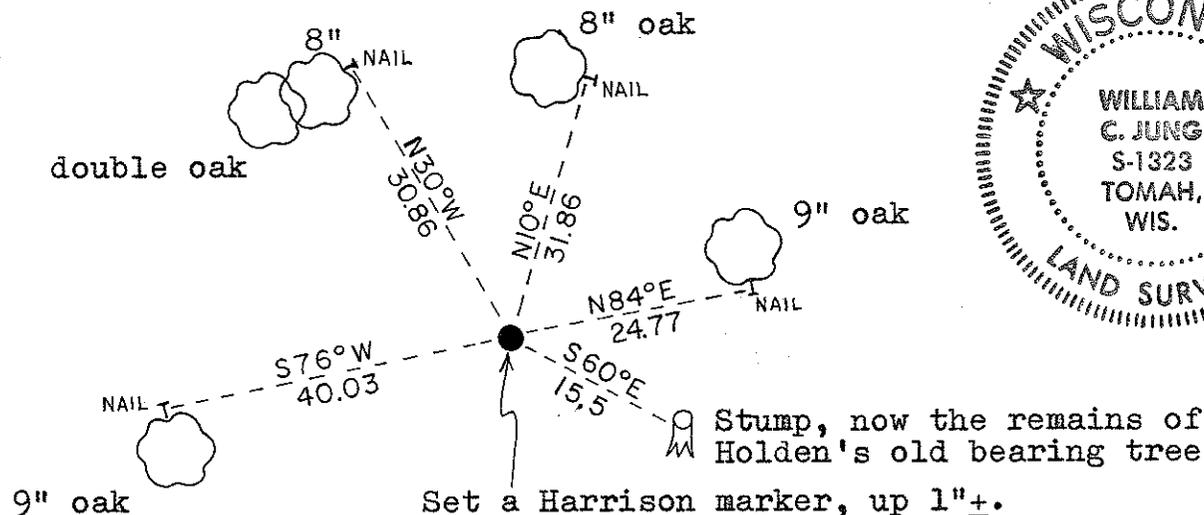

Approved: **HARLEY A. SIME**  
**MONROE CO. SURVEYOR**

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

(The bearing trees are all double blazed. Each distance is to a nail in a hack on the side of the tree.)

City, Village or Town New Lyme  
County of Monroe  
Wisconsin