

**CERTIFICATE**

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

**CERTIFIED LAND CORNER**


History of corner established since Original Government Survey

The 1940's McCoy boundary notes show a corner at this location. In November of 1982 William Jung found and accepted a 1 1/2 inch pipe over a 1 1/4 inch iron as the corner.

Description of evidence found

On December 19th, 2012, Anderson Engineering of Minnesota located the 1 1/2 inch open pipe. On April 21st, 2013, Anderson Engineering of Minnesota replaced the iron with a 3/4 inch aluminum drive monument with a 3 1/4 inch aluminum cap, stamped "FORT MCCOY BOUNDARY" "2013" "ANDERSON ENG. OF MN."

No. 21903120020

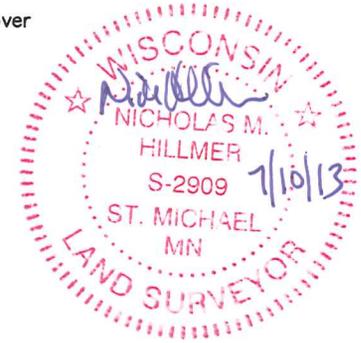

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

MCCOY DRIVE MONUMENT  
Northing (Y) 447236.09  
Easting (X) 660217.67

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

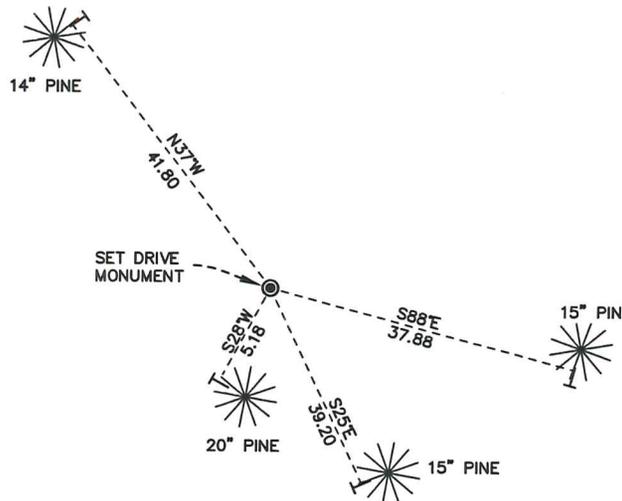

● = LOCATION CORNER  
Corner I.D. S 1/4 12  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

21903120020

I, William C. Jung, do hereby certify that on the 19<sup>th</sup> day of November 1982, I found (evidence) ~~██████████~~ of the South 1/4 corner of Section 12, T 19 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of corner establishment since Original Government Survey

The McCoy boundary notes of November 15, 1945 show a 1 1/2" iron pipe over a 1 1/4" iron at this corner.

Description of corner evidence found:

I found the McCoy marker and accepted it as the corner.

Dated this 17<sup>th</sup> day of Dec. 1982.

William C. Jung

Deputy County Surveyor



Title

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:


William C. Jung

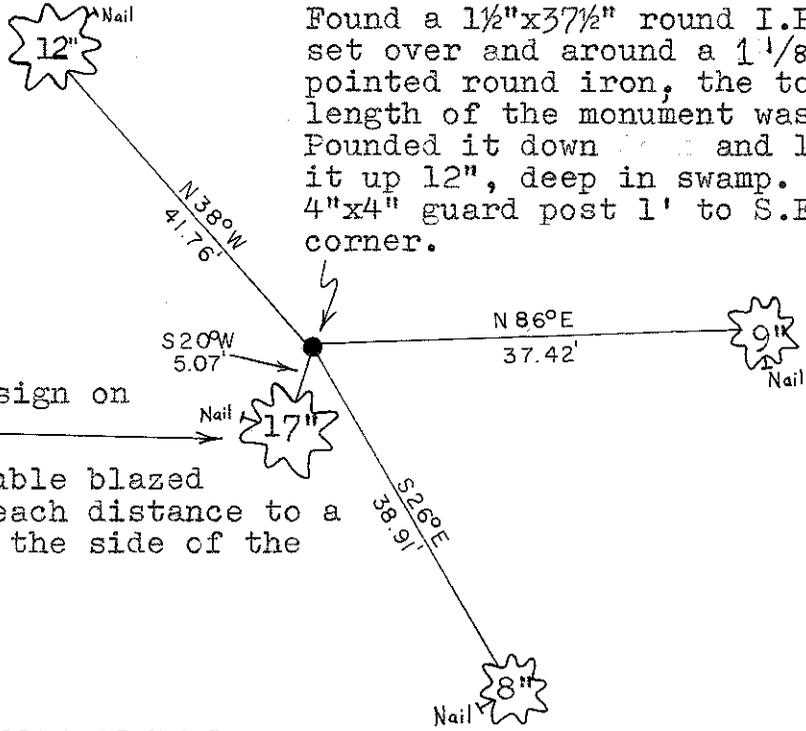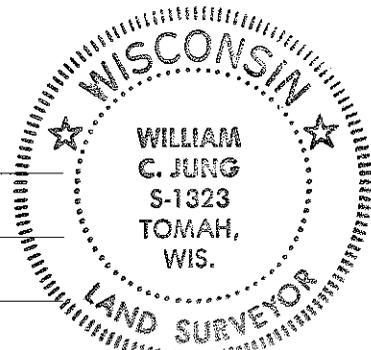

Found a 1 1/2"x3 7/8" round I.P. set over and around a 1 1/8" pointed round iron, the total length of the monument was 55". Founded it down and left it up 12", deep in swamp. Set a 4"x4" guard post 1' to S.E. of corner.

"No Trespassing" sign on this tree.

All B.T.'s are double blazed White Pines with each distance to a nail in a hack on the side of the tree.

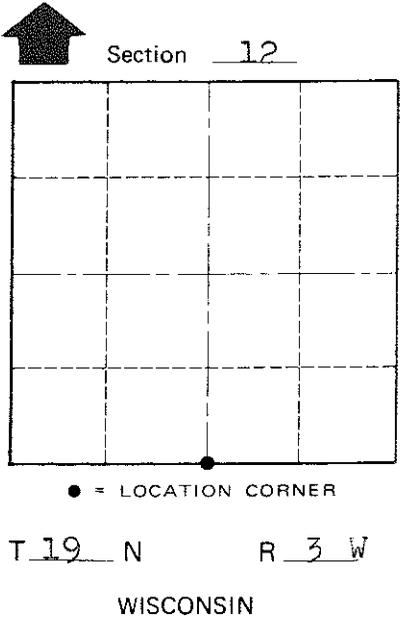

Approved: **HARLEY A. SIME**  
**MONROE CO. SURVEYOR**

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~Village of~~ Town of New Lyme  
County of Monroe