


# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013

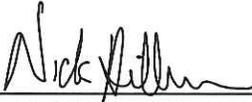

Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER

## History of corner established since Original Government Survey

In June of 1980 Harley Sime set a Harrison monument at this corner by intersecting a line made parallel with the whole west section line and the whole south section line of Section 20.

## Description of evidence found

On January 10th, 2013, Anderson Engineering of Minnesota located the Harrison monument flush with the ground and 1 foot north of a witness post with survey marker sign. Pits were found to the north, south, east, and west.

No. 21903170000



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 441901.29  
Easting (X) 641674.84

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

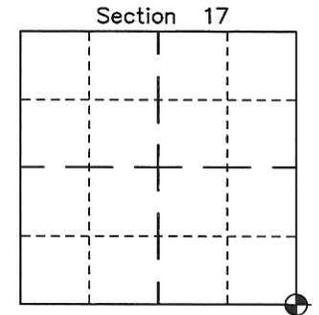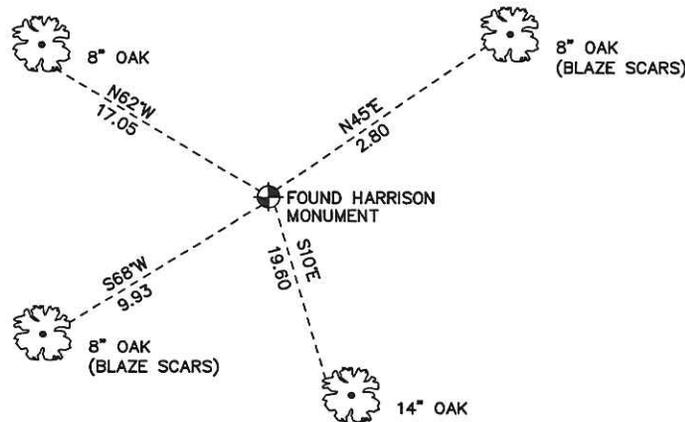

⊕ = LOCATION CORNER  
Corner I.D. SE 17  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

21903170000

I, Harley A. Sime, do hereby certify that on the 26th day of June 1980, I found ~~(no evidence)~~ (no evidence) of the NE corner of Section 20, T19 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 13th day of Feb. 1981.

Harley A. Sime, R.L.S. 355

County Surveyor  
Title

History of corner establishment since Original Government Survey

No known recorded history since the original government survey.

Description of corner evidence found:


The original notes show the North and South section lines being parallel and the East and West section line being parallel. The road along the West line of the E $\frac{1}{2}$ -SE $\frac{1}{4}$  of Section 20 and the West section line of Section 20 has only a four minute difference from being parallel indicating the validity of the original government notes. Also from established corners on the South section line of Section 20, there is only a four minute difference from being parallel with a line between the occupied corner at the NW corner of Section 20 and at the approximate NE corner of Section 20 in an E-W fence line. Therefore, the NE corner was set by intersecting the East section line (made parallel with the whole West Section line) with the North section line (made parallel with the whole South section line).

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Witnesses to corner location:

- G. Dechant-Crew Chief
- T. Tormoen
- C. Dade

COUNTY SURVEYOR FORM NO. 1

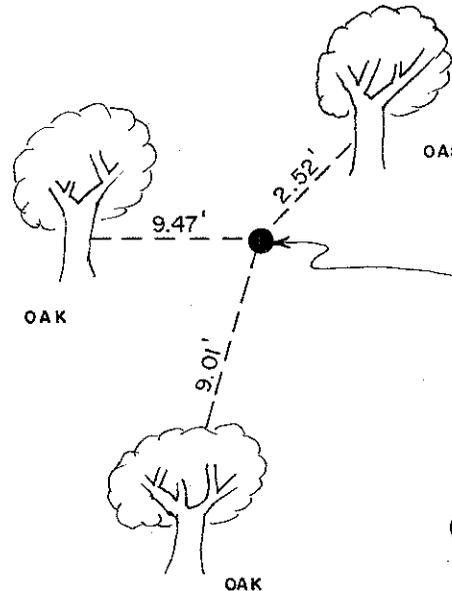

Set Harrison Monument, dug pits N, S, E, & W.

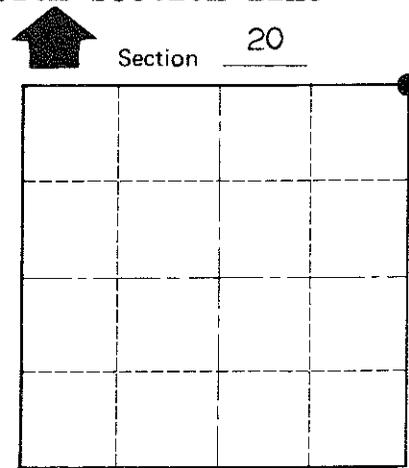

• = LOCATION CORNER

T 19 N R 3 W

WISCONSIN

**Approved: HARLEY A. SIME  
MONROE CO. SURVEYOR**

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

(All trees double blazed with N&C's set)

City, Village or Town New Lyme

County of Monroe