

CERTIFICATE

CERTIFIED LAND CORNER

No. 91

21903190000

I, Harley A. Sime, do hereby certify that on the 26th day of June 1980, I found (evidence) ~~(no evidence)~~ of the SW corner of Section 20, T 19 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 13th day of Feb. 1981.

Harley A. Sime, R.L.S. 355

County Surveyor
Title

History of corner establishment since Original Government Survey

Keach set a stone(+) here in March of 1904.
L. Fedderson in 1979 dug for stone, but could not find it.

Description of corner evidence found:



Found Keach's stone(+) lying upside down against a tree north of the road (Atwood Ave.) The corner was reestablished by setting it on line and by doubling the distance from the existing S¼ corner Section 19 and the existing SE corner of the SW¼-SE¼ of Section 19. This location fits existing field evidence very well.

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

G. Dechant-Crew Chief
T. Tormoen
C. Dade

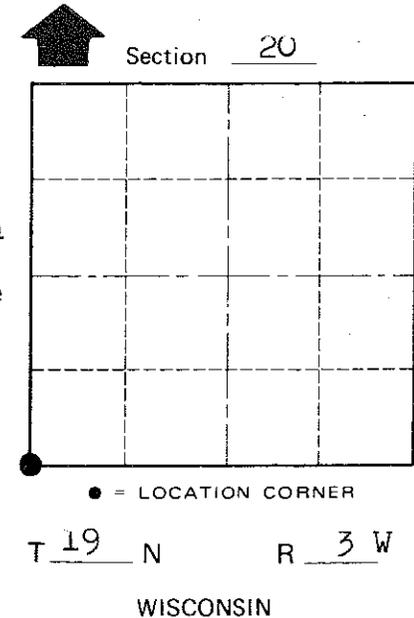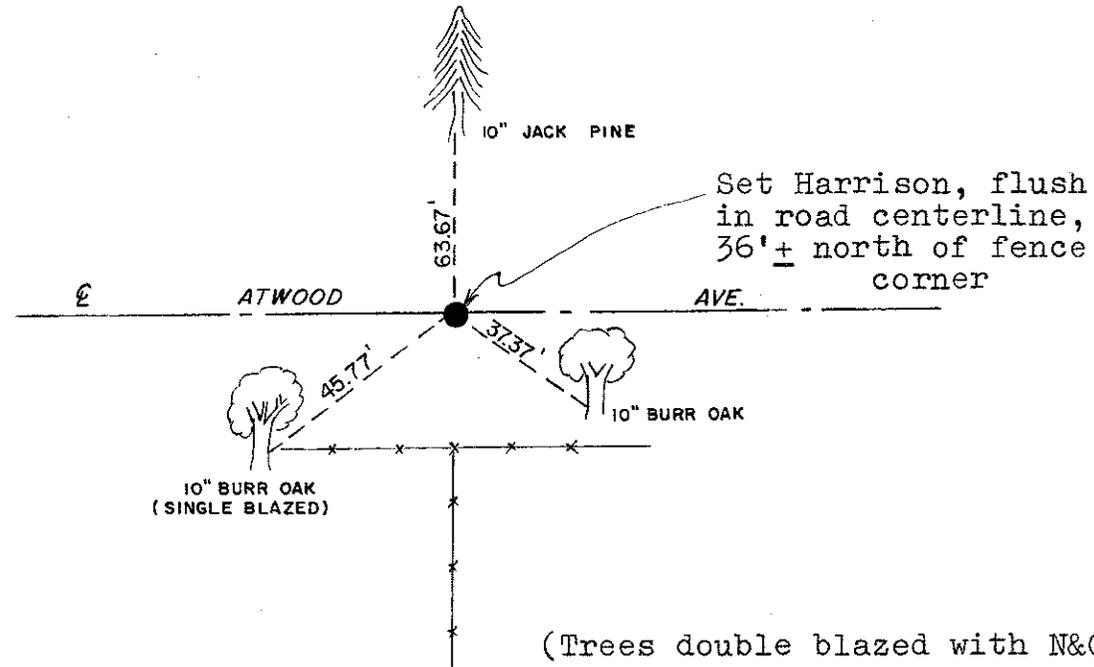

Approved: HARLEY A. SIME
MONROE CO. SURVEYOR

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town New Lyme
County of Monroe

(Trees double blazed with N&C's set)