


CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER


History of corner established since Original Government Survey

On December 6th, 1983, William C. Jung found no record since the original government survey. Jung set a Harrison monument by single proportionate measurement using the existing southwest and southeast section corners.

Description of evidence found

On August 8th, 2012, Anderson Engineering of Minnesota located the Harrison monument flush with the ground.

No. 21903210020

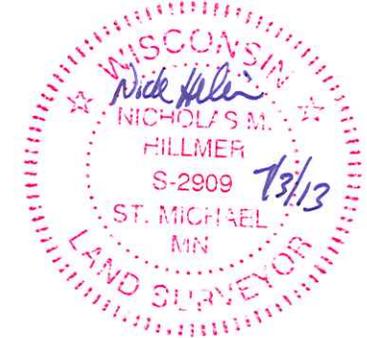

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:




Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 436702.30
Easting (X) 644324.30

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

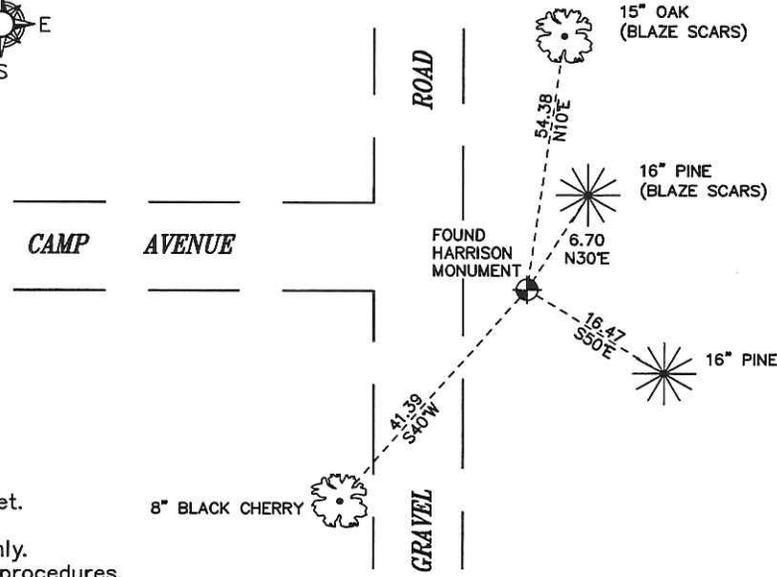

⊕ = LOCATION CORNER
Corner I.D. S 1/4 21
T 19 N R 3 W
Town of New Lyme
Monroe County, WI.

21903210020

I, William C. Jung, do hereby certify that on the 6th day of December 1983, I found ~~(evidence)~~ (no evidence) of the North 1/4 corner of Section 28, T 19 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 10th day of Dec. 1983.


William C. Jung
Deputy County Surveyor, R.L.S. 1323
Title

History of corner establishment since Original Government Survey

Nothing on record since the original government survey.

Description of corner evidence found:

The corner was set by single proportionate measurement using the existing monuments at the NW and NE section corners.

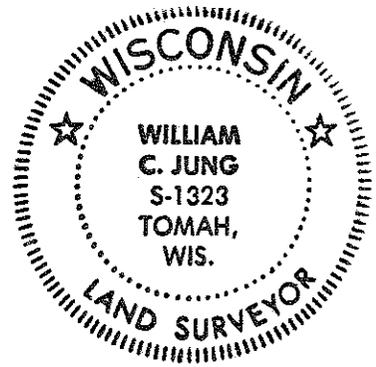

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

William C. Jung

(All bearing trees are double blazed with each distance to a nail in a hack on the side of the tree.)



Set a Harrison marker, flush with the ground, and set a steel fence post about 1' to the West of the Harrison.

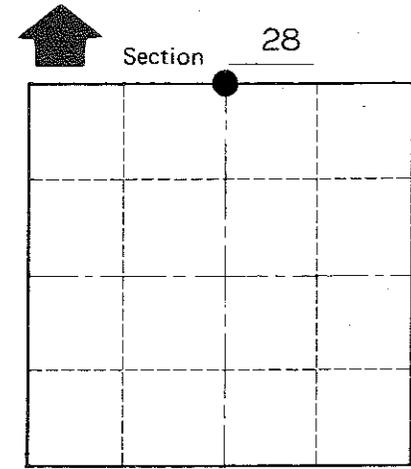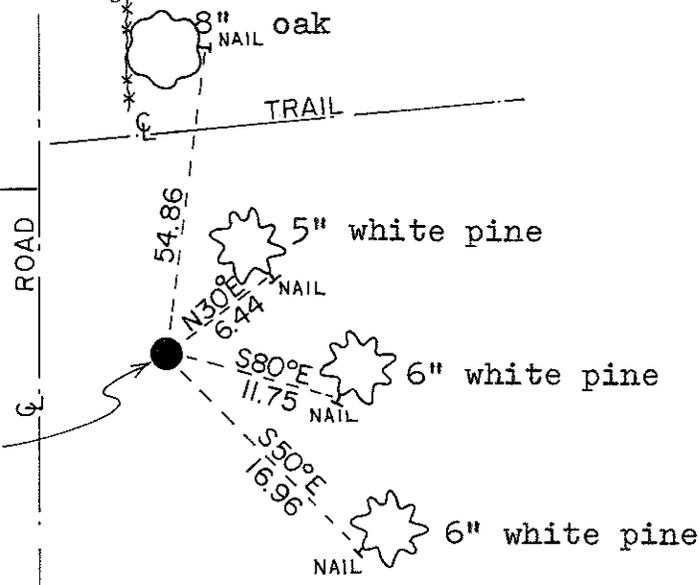

• = LOCATION CORNER

T 19 N R 3 W

WISCONSIN

Approved: **HARLEY A. SIME**
MONROE CO. SURVEYOR

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village~~ or Town New Lyme

County of Monroe

Wisconsin