

# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013

Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER


### History of corner established since Original Government Survey

Keach set a stone here in 1904. Lawrence Feddersen found the sand stone and replaced it with a Harrison monument in 1981.

### Description of evidence found

On February 27th, 2013, Anderson Engineering of Minnesota located the Harrison monument flush with the ground and 0.5 feet west of a railroad tie corner post.

No. 21903290000

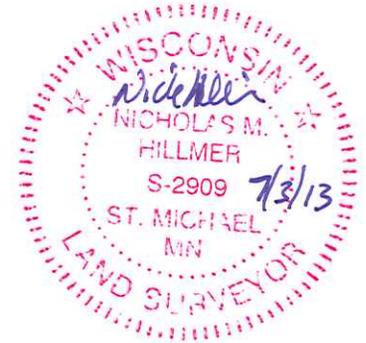

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 431408.72  
Easting (X) 641729.97

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

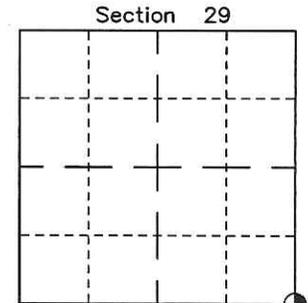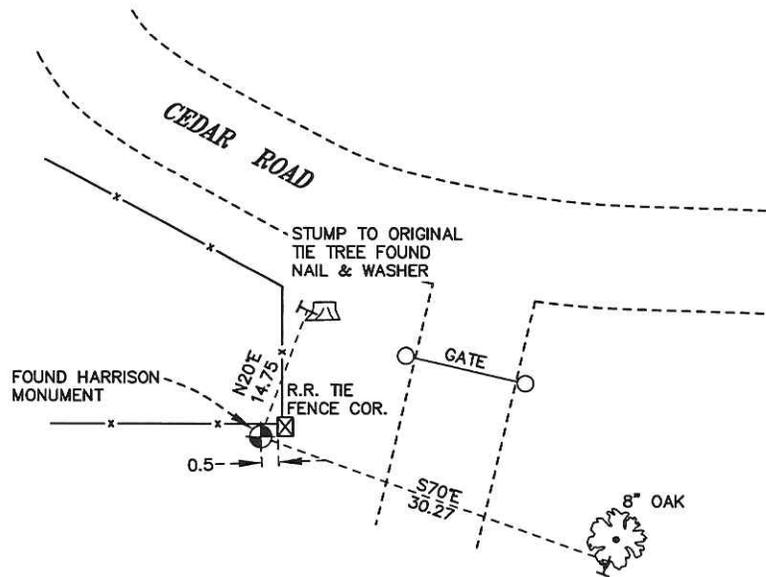

⊕ = LOCATION CORNER  
Corner I.D. SE 29  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

**21903290000**

I, ~~Lawrence A. Feddersen~~, do hereby certify that on the 23 day of September 1981, I found (evidence) ~~(on extension)~~ of the SE corner of Section 29, T 19 N, R 3W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 30 day of Nov. 1981.

Lawrence A. Feddersen

Registered Land Surveyor  
Title

History of corner establishment since Original Government Survey

Keach set stone at corner in April of 1904.

Description of corner evidence found:

According to James Sween, native resident of the area and the Town Supervisor, the NE, NW, and SE corners of Section 29 were set with stones. He could not remember who did the survey. We found all but the NW corner. Replaced sandstone with Harrison Monument, placing old sandstone monument just South of Harrison. Keach (Jackson County Surveyor) set these stones in April of 1904.

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

nail/washer in blaze  
painted orange in the  
northerly 12" trunk of  
a double white oak

Witnesses to corner location:

Lawrence Feddersen



Thomas Mangene

set Harrison Monument in  
place of stone, stone now  
33/4" South of corner

nail/washer in blaze  
painted orange in  
20" double white oak

nail/washer in blaze  
and painted orange in  
10" white oak

nail/washer in  
blaze and painted  
orange in 11" white  
oak

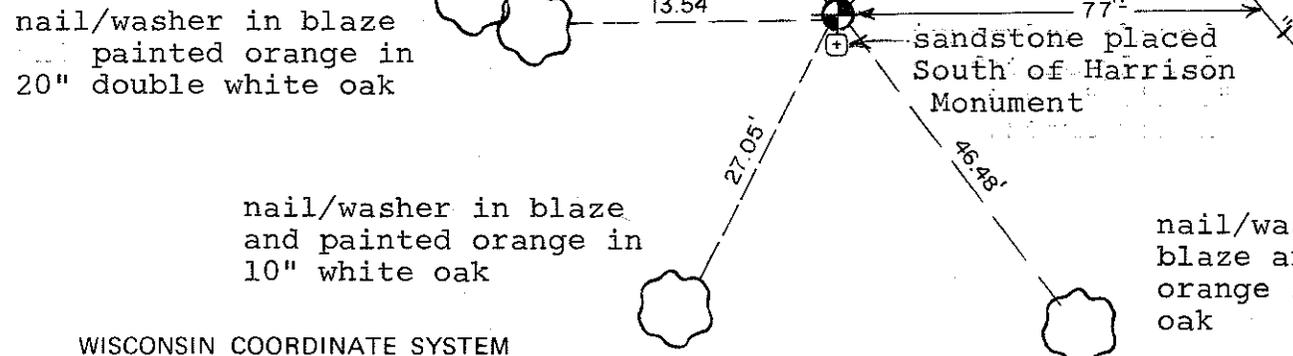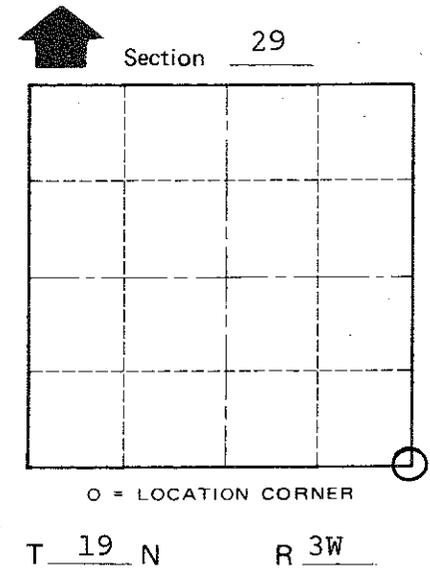

Approved: **HARLEY A. SIME**  
**MONROE CO. SURVEYOR**

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City of New Lyme~~ Town of New Lyme

County of Monroe

WISCONSIN