


CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

History of corner established since Original Government Survey

Keach set a stake at this corner in 1904. William Jung set a Harrison monument by using single proportion measurements in 1981.

Description of evidence found

On February 27th, 2013, Anderson Engineering of Minnesota located the Harrison monument flush with the ground and 1.15 feet north of steel post.

No. 21903330020



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 426104.96
Easting (X) 644370.50

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

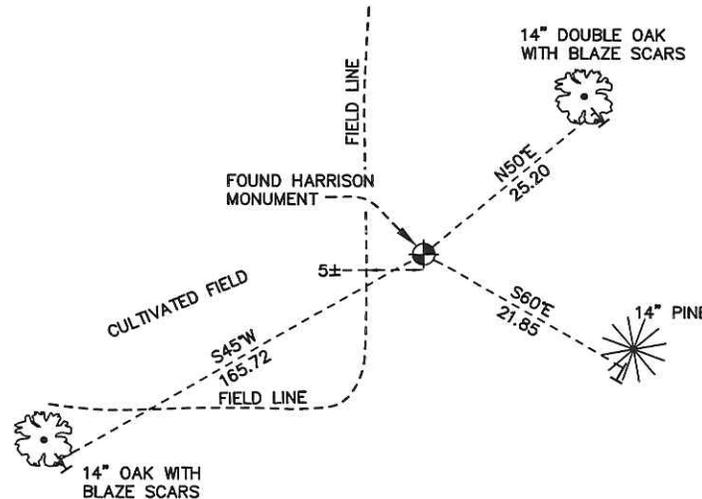

⊕ = LOCATION CORNER
Corner I.D. S 1/4 33
T 19 N R 3 W
Town of New Lyme
Monroe County, WI.

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

CERTIFICATE

CERTIFIED LAND CORNER

No. 8

21903330020

I, William C. Jung, do hereby certify that on the 10th day of June 1981, I found ~~(no evidence)~~ (no evidence) of the North 1/4 corner of Section 4, T 18 N, R 3 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 28th day of August 1981.

William C. Jung
Registered Land Surveyor
Title

History of original corner establishment:

Keach set a stake at this corner in May of 1904.

Description of corner evidence found:

Set the corner on line and equidistant between the NW and NE corners of Section 4.



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

William C. Jung


Witnesses to corner location:

W. Jung

C. Pietz

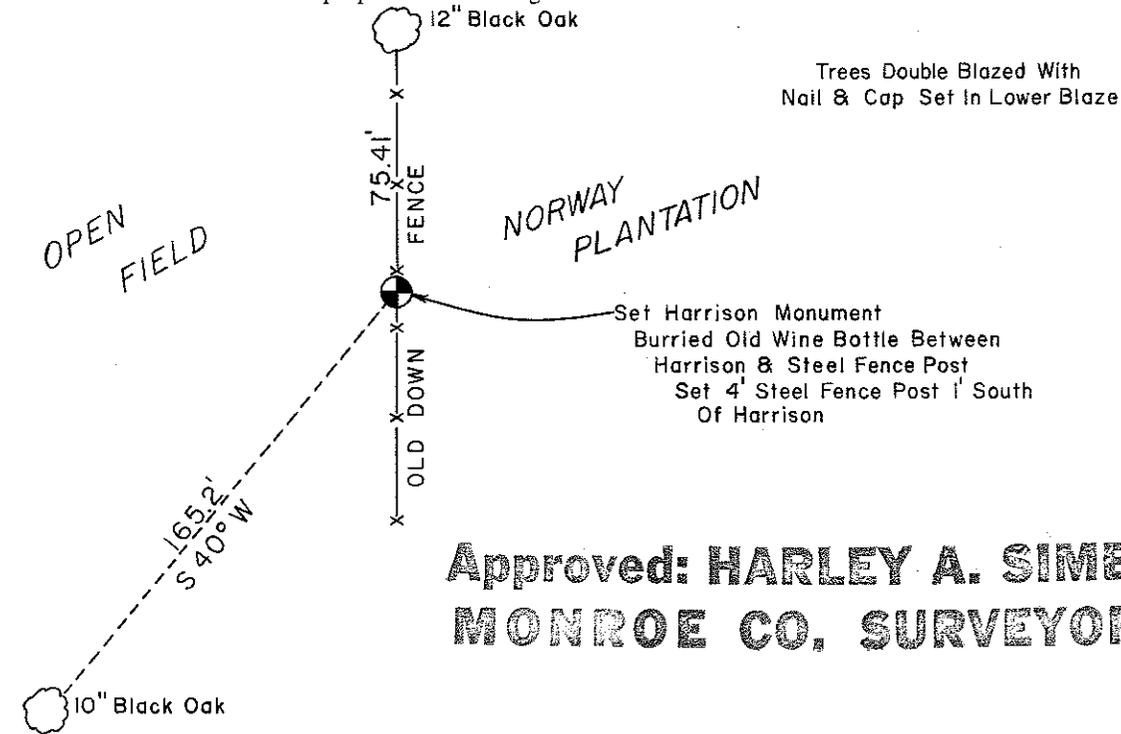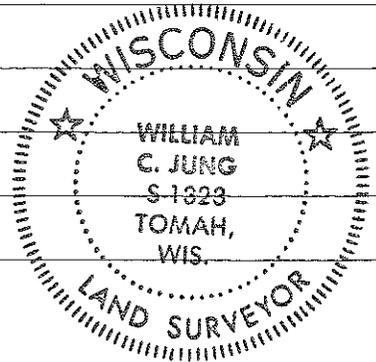

Trees Double Blazed With Nail & Cap Set in Lower Blaze

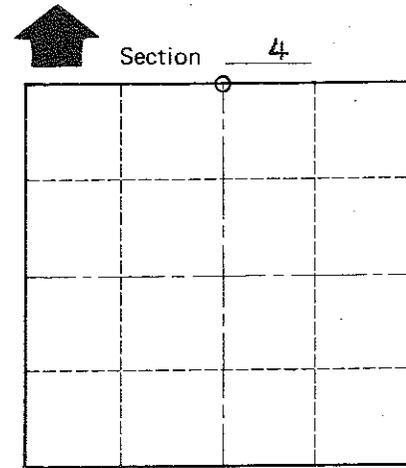

O = LOCATION CORNER

T 18 N R 3 W

WISCONSIN

Approved: **HARLEY A. SIME**
MONROE CO., SURVEYOR

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal _____

Vertical _____

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~_____~~ Town Lafayette
County of Monroe
Wisconsin