

## CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

## CERTIFIED LAND CORNER


### History of corner established since Original Government Survey

In 1936 David Blencoe reestablished this corner and set a drive shaft. In 1940 Keith Bennet found and used this corner. The 1940's McCoy boundary notes show a corner at this location. In December of 1982 William Jung found and accepted the drive shaft as the corner. Jung also found a McCoy marker as a witness corner.

### Description of evidence found

On November 29th, 2012, Anderson Engineering of Minnesota located the drive shaft in a mound 2.2 feet above grade. The shaft has the township, range, and section numbers stamped in it. The McCoy monument, a 4 inch U.S. Army Corps of Engineers survey control mark disk set in concrete 0.36 feet east of the drive shaft, was also located. The mound has pits dug on the north, south, east, and west.

No. 22003360000

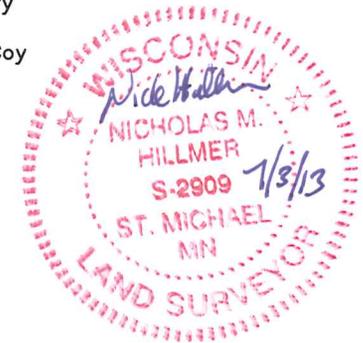

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)



DRIVE SHAFT

Northing (Y) 458159.40  
Easting (X) 662933.08

Base Station - 22 182W

Northing (Y) 408053.25  
Easting (X) 679287.00

All distances are shown in U.S. Survey Feet.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

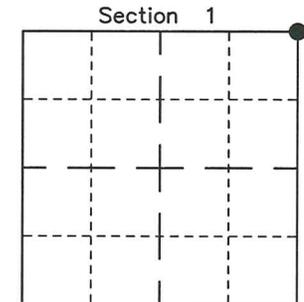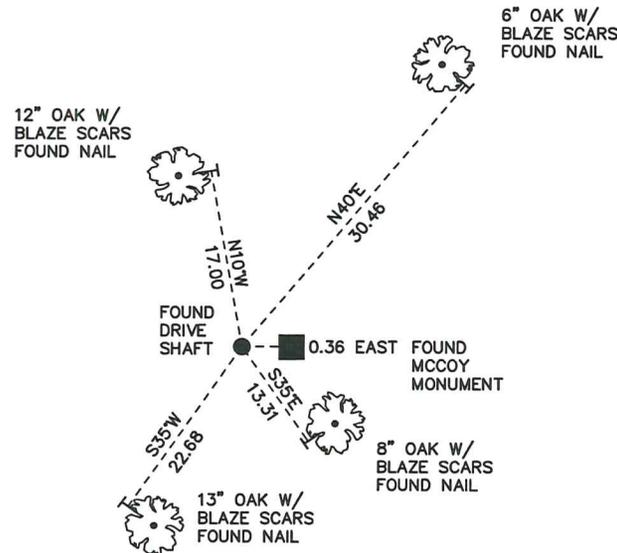

● = LOCATION CORNER  
Corner I.D. NE 1  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

22003360000

I, William C. Jung, do hereby certify that on the 16th day of December 1982, I found (evidence) ~~no evidence~~ of the Northwest corner of Section 6, T 19 N, R 2 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 28th day of Jan. 1983.

William C. Jung

Deputy County Surveyor

Title

History of corner establishment since Original Government Survey

In about 1936, David Blencoe, from Jackson County, re-established this corner and set a drive shaft housing at the corner. In 1940 Keith Bennett found and used this corner. The McCoy boundary notes show that this corner (gear shaft) was found and used as the corner.

Description of corner evidence found:


I found Blencoe's corner in good condition at the Town Corner. This auto rear end (or drive shaft or gear shaft-however you want to describe it) has all the town, range, and section numbers stamped on it. The McCoy marker is a witness corner.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Replaced  
ON 11/16/83  
Set Sign And  
Post By Corner  
Comments  
WITNESSES  
Jung, Abbas

Witnesses to corner location:



William C. Jung

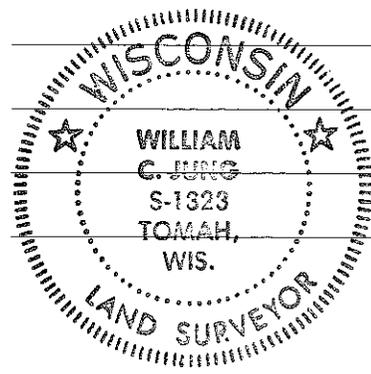

Approved: HARLEY A. SIME  
MONROE CO. SURVEYOR

Ex. auto rear end, up 28", and has a 2" shaft, with housing (4") 7" plate, and gear on top.

Ex. witness monument; 5" sq. McCoy concrete marker with brass cap up 5" on S.E. side of corner.

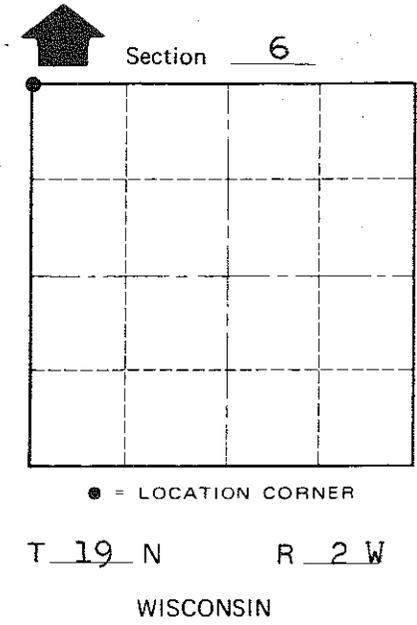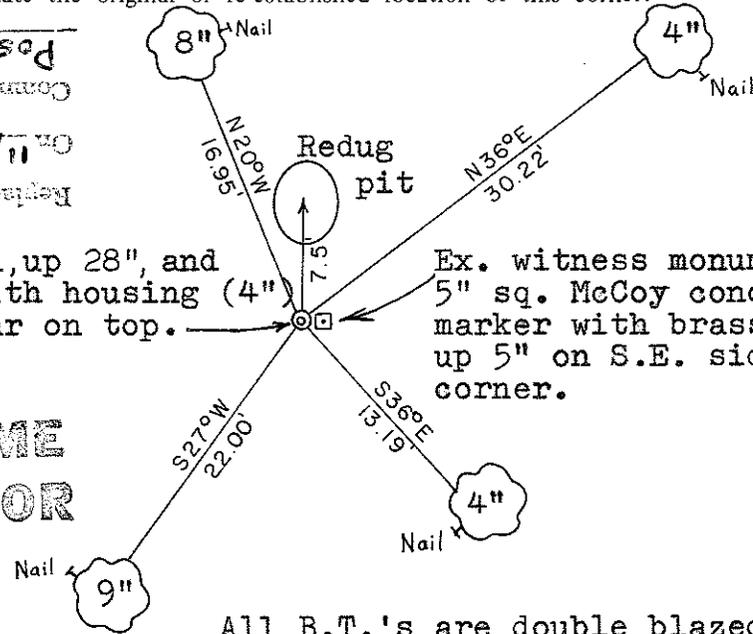

All B.T.'s are double blazed Oaks; each distance is to a nail in a hack on the side of the tree.

SURVEY CONTROL ORDER

|            |       |
|------------|-------|
| Horizontal | _____ |
| Vertical   | _____ |

WISCONSIN COORDINATE SYSTEM

| Corner            | East (X) | North (Y) | Elevation (Z) | Zone |
|-------------------|----------|-----------|---------------|------|
| Control Sta. Name |          |           |               |      |

City, Village or Town of Grant  
County of Monroe

COUNTY SURVEYOR FORM NO. 1