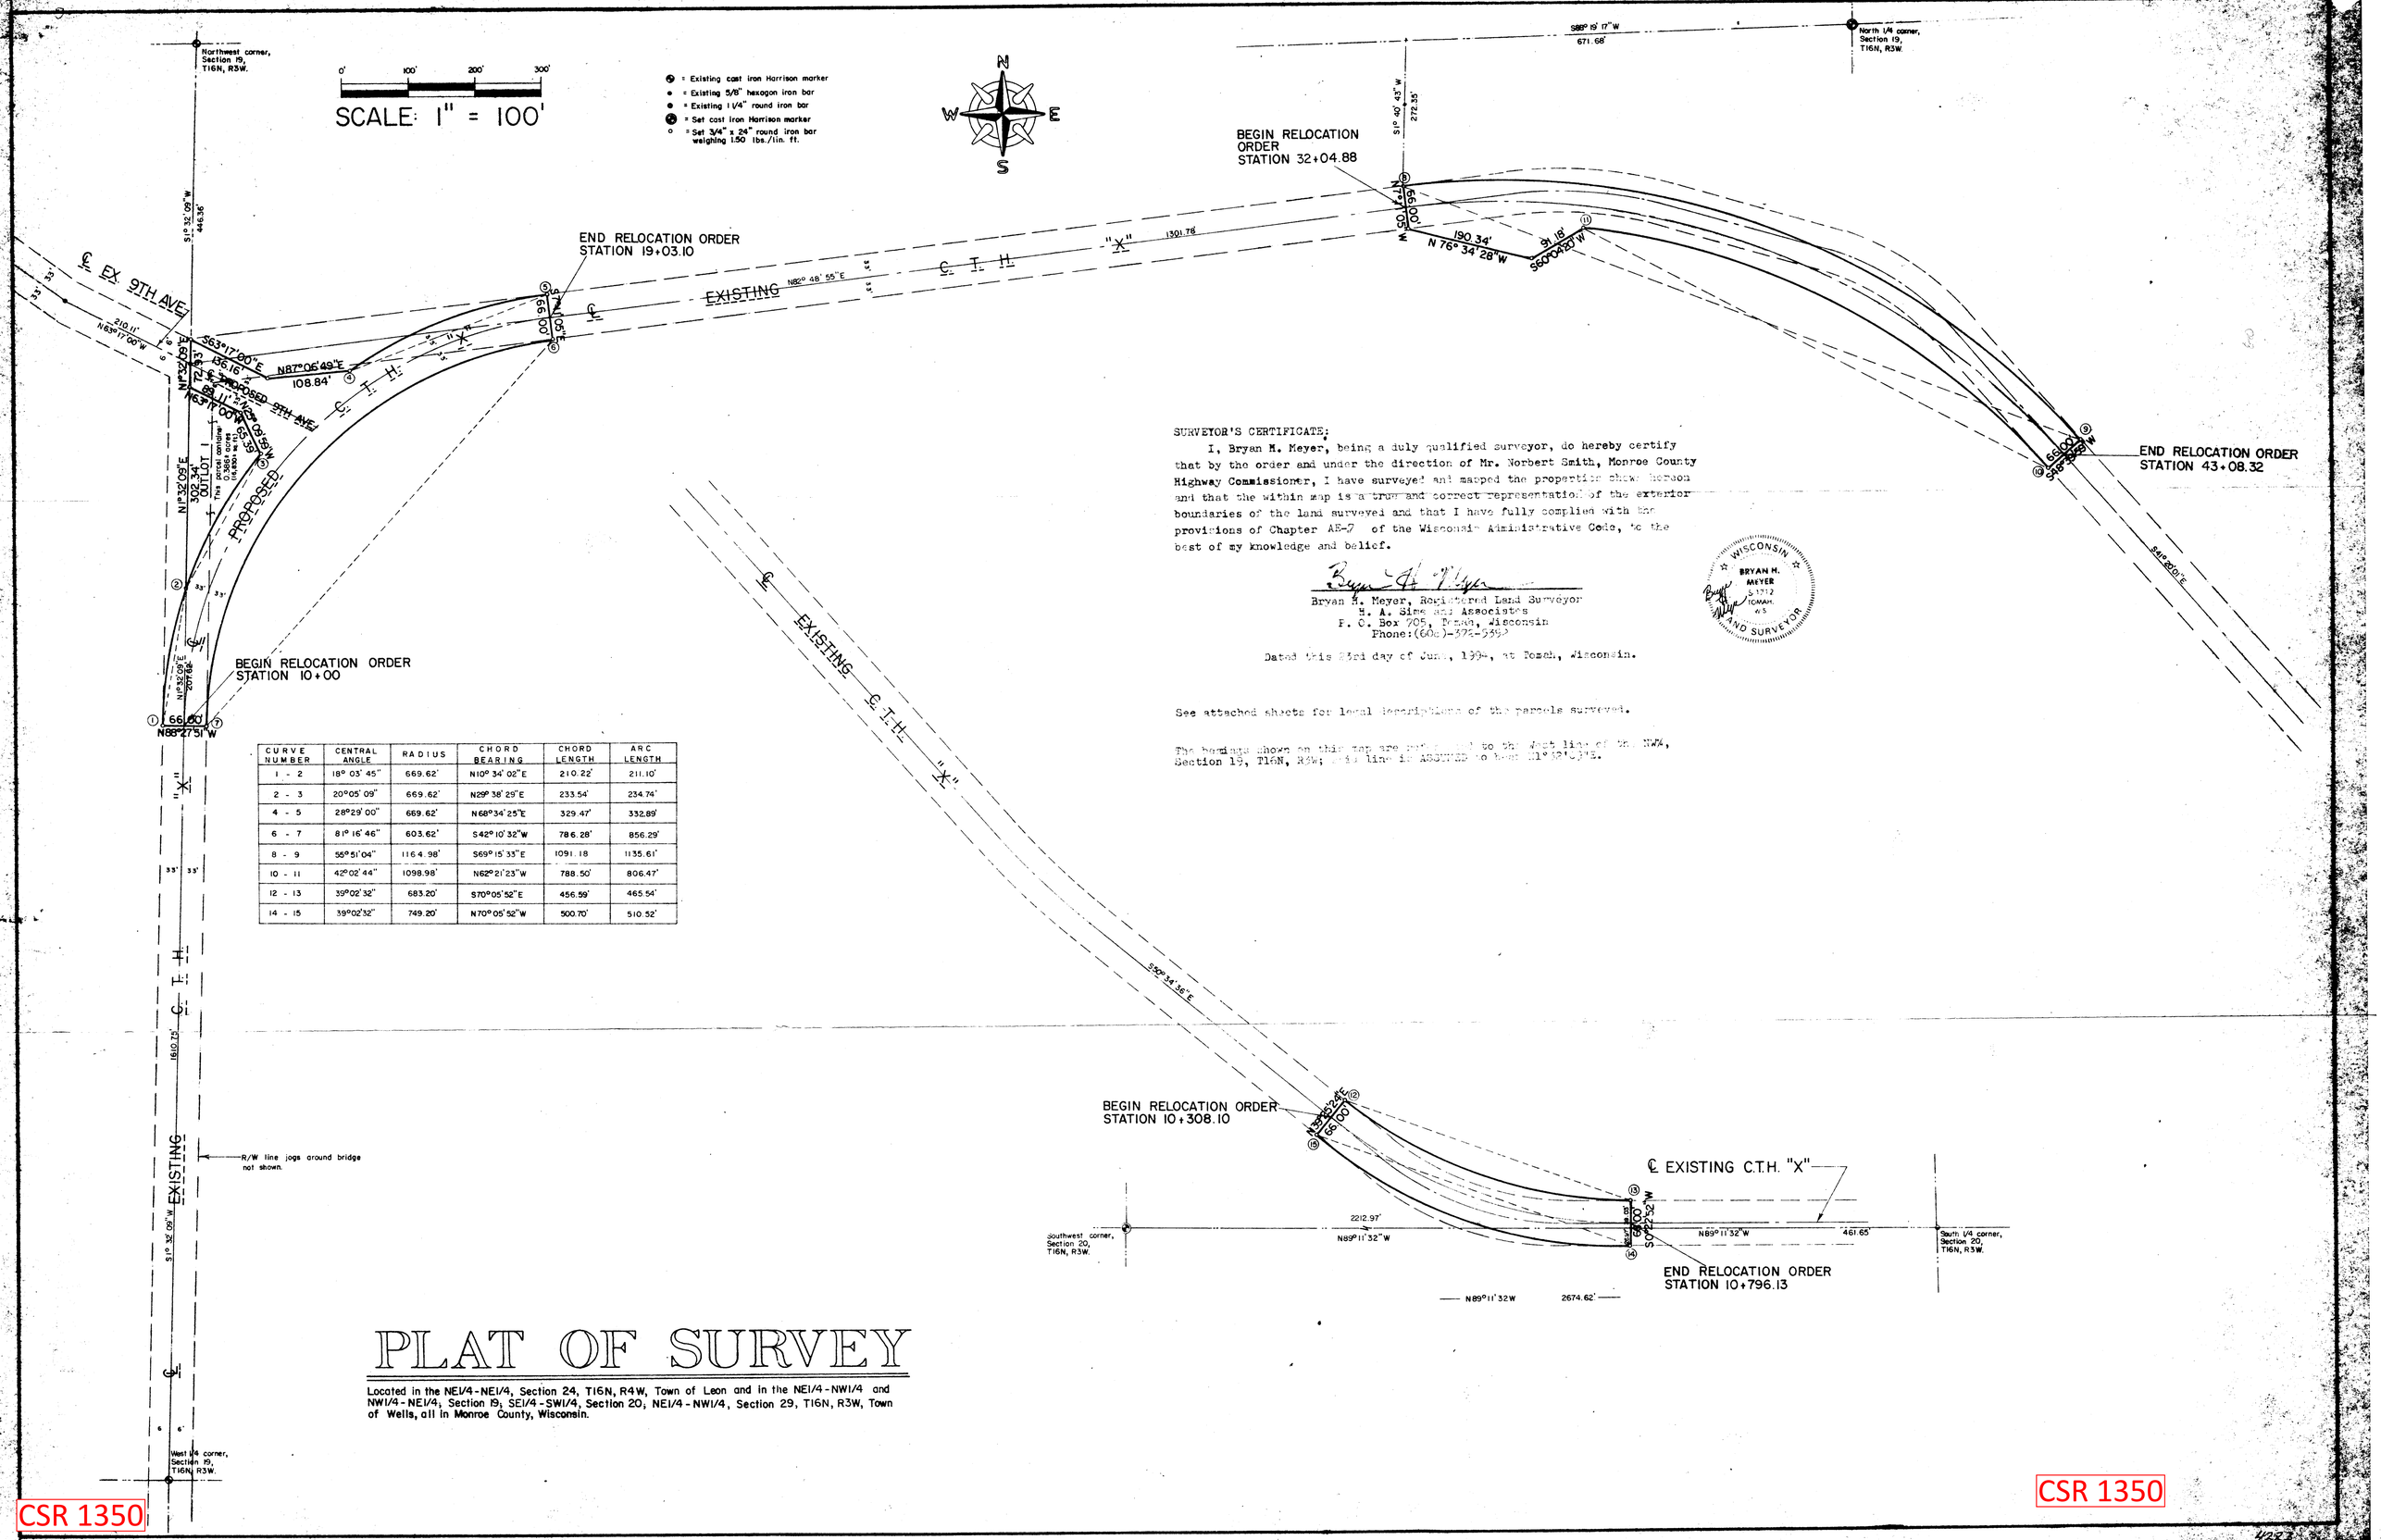

CURVE NUMBER	CENTRAL ANGLE	RADIUS	CHORD BEARING	CHORD LENGTH	ARC LENGTH
1 - 2	18° 03' 45"	669.62'	N10° 34' 02"E	210.22'	211.10'
2 - 3	20°05' 09"	669.62'	N29° 38' 29"E	233.54'	234.74'
4 - 5	28°29' 00"	669.62'	N68°34' 25"E	329.47'	332.89'
6 - 7	81° 16' 46"	603.62'	S42° 10' 32"W	786.28'	856.29'
8 - 9	55° 51' 04"	1164.98'	S69° 15' 33"E	1091.18	1135.61'
10 - 11	42° 02' 44"	1098.98'	N62° 21' 23"W	788.50'	806.47'
12 - 13	39°02' 32"	683.20'	S70° 05' 52"E	456.59'	465.54'
14 - 15	39°02' 32"	749.20'	N70° 05' 52"W	500.70'	510.52'

SURVEYOR'S CERTIFICATE:

I, Bryan H. Meyer, being a duly qualified surveyor, do hereby certify that by the order and under the direction of Mr. Norbert Smith, Monroe County Highway Commissioner, I have surveyed and mapped the properties shown hereon and that the within map is a true and correct representation of the exterior boundaries of the land surveyed and that I have fully complied with the provisions of Chapter AE-7 of the Wisconsin Administrative Code, to the best of my knowledge and belief.

Bryan H. Meyer, Registered Land Surveyor
H. A. Sime and Associates
P. O. Box 705, Tomah, Wisconsin
Phone: (608)-372-5392

WISCONSIN BRYAN H. MEYER S-1712 TOMAH, WIS AND SURVEYOR

Dated this 23rd day of June, 1984, at Tomah, Wisconsin.

See attached sheets for legal descriptions of the parcels surveyed.

The bearings shown on this map are referenced to the West line of the NW¼, Section 19, T16N, R4W; said line is assumed to bear N1°32'09"E.

PLAT OF SURVEY

Located in the NE1/4-NE1/4, Section 24, T16N, R4W, Town of Leon and in the NE1/4-NW1/4 and NW1/4-NE1/4, Section 19, SE1/4-SW1/4, Section 20, NE1/4-NW1/4, Section 29, T16N, R3W, Town of Wells, all in Monroe County, Wisconsin.

CSR 1350
CSR 1350