Office of **County Surveyor,**

Jackson **County, Wis.**

Sec. 22 Town 18 N., Range 4 West 4th P. M.

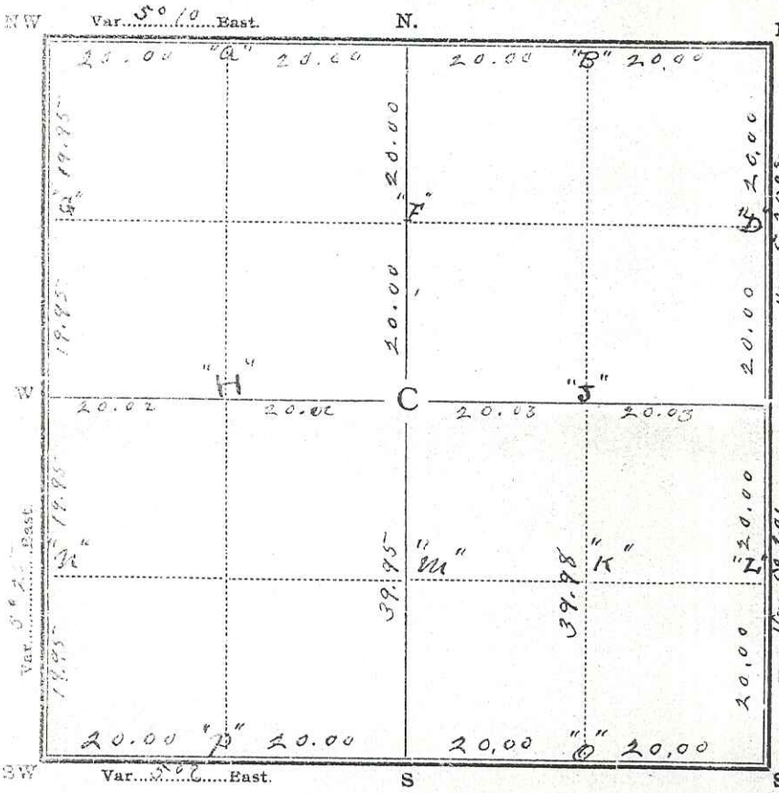

REMARKS.

Survey made May 26, 27, 28, 29 1902

Chainmen Jno. Burns & Aug. Muchann

All lines run with transit by fore and hind sights.

All trial or random lines corrected back.

North ¼ corn Reestablished = distance in line from and with section corns. I found a stake (marked) within 18 inches of the reestablished ¼ corn, and another 55 links north of corn (not marked) Neither of said stakes had any thing to verify them & Mr Hammman says that no witness trees were ever found within his memory.

Center ¼ corn at intersection of straight quarter lines. Is 16 lks W. & 18 links S. of old corn as used by some previous surveys. NE sec. cor. plain. West B.T. blaze B.T. Marks under 4 inches of wood. E ¼ corn plain ~~N B.T.~~ North B.T. Stones made on both upper and lower blazes very plain under 6 inches of growth of solid wood.

TABLE OF CORNERS.

CORNER	BEARING TREES.	DIAM. INCHES.	BEARING.	LINKS DISTANT.	REMARKS.
Orig. NE	Old Corner in pile of stone and verified. Orig. B. Oak	new 18.	N. 88¾ W	339	B T Mark plain
	Orig. W. Oak	Stump	S 8½ E	2.98	Stones part of blaze
New line	B Oak		S 60 W	14	Set iron Stake.
NW	Old corner in pile of stone by action stump of				and verified
	W Oak	N. 7	E	123	
Orig. SW	W Oak	Stump	N 21 W	457	
	W "	"	N 30 E	433	
New line	W. Oak	6	N 48½ E	12	
	Stake South side of pine post corner.				
Reset SE	From meeting of line from North and West Posts reported to go further East on true line to Bunn but had agreed to accept corner as down. New tree W Oak. S 7½ W 28. (Stone X)				
N	Reset = distance from Sec. corns. 18 inches South of Holden's old corner stake set for Baldwin. New tree W Oak		N 5½° W 93.		
S	Reset stake = distance from Sec. corner in Straight Sec. line. New tree Marked by Holden	B. Oak	N 29 W	56	Set Stake –
Orig. E	B. Oak	new 18.	S 2° W	741	Mks. Plain
	B. Oak	6	N 85½ E	19.	Small Stump
New line	gives from Stump of original tree.				
W	Reset = distance from Sec. Corns.				
	J. Oak	18	N 6° W	22	Marked by Holden
C New	Est'd at the intersection of straight quarter lines. Set Stone 30 X 10 X 6				
	S. Tree. R.	Oak	19. N 57½ E	40	
	W Oak	8	S 7½° E	42 –	Stone S. Side
	Reset & Post Stone Cap Alum and used plumb line.		plumb line	66	to plumb corn

CORNER	BEARING TREES	DIAM. INCHES.	BEARING.	LINKS DISTANT.	REMARKS.
"a"	Stakes	No	Bearings		
"B"	Stakes	No.	Bearings		
"D"	Stakes	No	Bearings		
"F"	Stakes	No.	Bearings		
"G"	Stake No	post side of corn bearings			post
"H"	Stakes	No.	bearings.		
"J"	Stake	No	bearings		
"K"	Stakes	No.	bearings.		
"L"	Marked by	Stakes	No.	bearings.	
"M"	Iron pipe for corner				
"N"	J. Oak	14	N 10 W	3 lks	Marked by Holden
"O"	B Oak	N. 66 E		15½	
	W Oak	8	N 52 W	29	
"P"	Stakes	No.	Bearings.		

I hereby certify that the above Diagram and Field Notes are correct of the Partial *Survey of Section* 22 *Town* 18 *N., Range* No. 4 W., *as surveyed by direction of* T. P. Able & Fred. Holden

Dated this 14th *day of* June *1903*

C. M. Kirch

County Surveyor, Jackson County, Wis.

Recorded on Page 173 Rec. to 1904 of Regd. in Co Surveyor office Fred R. Holden Surveyor Monroe Co. Wis.

CSR 1792