CERTIFICATE OF SURVEY—COUNTY SURVEYOR. 5-1-3 Printed and for sale by R. H. GILE, Milwaukee, Wis.

Office of **County Surveyor,**

Jackson **County, Wis.**

Sec. 33 Town 19 N., Range 3 W. 4th P. M. and other lines

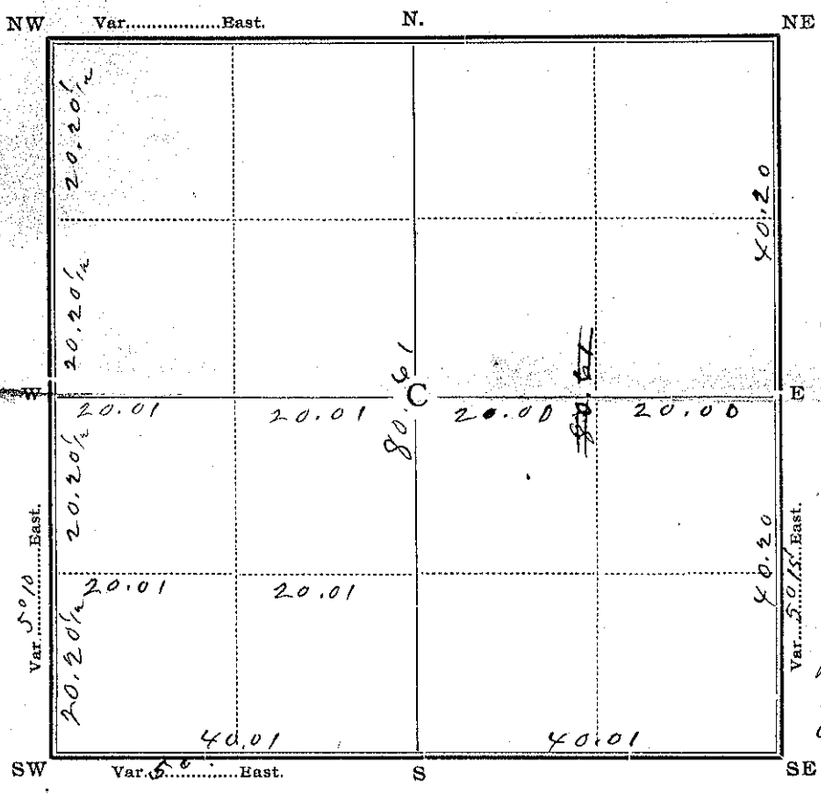

REMARKS.

Survey made May 3rd to 6th 190X

1st Run Town line from SW corner Sec. 32 W. to SE corner of Sec. 35 Var 5°

2nd Run W. line Sec. 33 from SW corner to NW corner Var. 5°10 E

3rd Run East line Sec. 33. Var 5°15

4th Run N & S ¼ lines and established center of Section at intersection of straight ¼ lines. Estd. E & W quarter corners at = distances from and in line with section corners, and ⅛ and ¼ corners = distance between other corners. All lines run with transit in good adjustment and with pick for back sighting. Sights taken from each station to insure correct work. Chaining done with blazed steel chain carefully leveled and plumbed down to pins at ends. continued on other side

TABLE OF CORNERS.

CORNER	BEARING TREES.	DIAM. INCHES.	BEARING.	LINKS DISTANT.	REMARKS.
NE	Stump of Black Oak. Found point of old stake. Set stone		N X & W 16 X 1 X X4	68	Shows ax blazing in good plain
NW	Pine (down) Fd. Stone		N 26 E set by Holden	24	Plain OK.
	Made no bearings				
SW	Reestablished in Town line & Set Stone				
	Made no bearings				
SE	Reestd in Town line & Set Stone				
	Made no bearings				
N	Pine	10	S X 2½ 28	X 3	Blaze plain
	Stake	20	set by Holden Ck.		
	Made no bearings				
S	Reestablished in line & Set Stake				
E	Reestd = distance from Section corner & Set stone				
	Made no bearings Org. gone				
W	Reestablished in line & adjusted from Section Corner & Set Stake & Stone				
	Made no bearings				
C	Set at X of ¼ lines				
	Made no bearings				

CORNER	BEARING TREES	DIAM. INCHES.	BEARING.	LINKS DISTANT.	REMARKS.
SE Sec. 35	Found old stake & Roots of oak B.T.		NE B.T. plain also set post in mound		
S ¼ Sec. 35	Fd old stake point of Counter		plain	about 1 foot N. of	
SW Sec. 35	Found old stake, points south of pine corner		plain	about 1 foot	
	BT stumps stand		Set Stone 36 X 11 X 6.		
SW Sec. 32	Wagon tire at corner		Found roots of two white BT's stumps stand		Old corner
S ¼ 3 X	Reestd. & Set stone		in line		
S ¼ 32	Reestd & Set stone		in line		

I hereby certify that the above Diagram and Field Notes are correct of the partial *Survey of Section* 32, 33, 34 & 35 *Town* 19 *N., Range* 3 W, *as surveyed by direction of* Mrs. Olson

Dated this 9th *day of* May *190*X

E. M. Keach

County Surveyor, Jackson *County, Wis.*

CSR 1908

CSR 1908

Certificate of Survey.

Section 2 Sec 33

Township 19

Range 3 W

For Keeler

Date 190

County Surveyor.

PRINTED AND FOR SALE BY R. H. GILE, MILWAUKEE.

P. 210

Remarks (continued)

Manner of Running lines etc – Commenced at the SW corner Sec. 33 from 19 R 3 West and run East (Var. 5° E) setting Random stakes at every 40 chains. Set Pickets as back sights at every station, which I could see nearly 2 miles back with Telescope of Transit from certain points in line. When going over hills made sure by test sights and reversals of instrument to prove correctness of line and that same was straight. At 4 miles & 12 links came out 6 links North of the SE corner of Sec. 33 Corrected back, and found S¼ corner of Sec. 33 also SE corner of Sec. 34 as above. Found old blazes on timber on every mile of line agreeing with my corrected line. Run North on W. sect line Sec 33. Var 5° 10 E. At 1670 chains Ledge of Rock at 80.82 Sec. corner. – (80.82 is to 80.00 – as 1670 is to 16.54 thus approximate distance from SW cor. 33 to ledge of rocks as per notes)

Run North on East sec. line Var. 5° 15 – at 80.40 Sec corner Fd. point of old stake in ground plain & stump of B. Oak N 44° W 58 links. Shown old axboxing in stump but marks rotted off. Run N. on N & S¼ line 80.61 chains to north ¼ corner (plain). Test of Chaining {East sect line is 80.82 / W Sec. line is 80.40} average 80.6 which the N & S¼ line proved to be. Nearly every line established agrees with old fence lines of years ago.

C. E. K.