

# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER

## History of corner established since Original Government Survey

In November of 1983 William Jung set a 6 inch square concrete marker at this corner by single proportion measurement from the southwest corner to the southeast corner of Section 2.

No. 21903020020

## Description of evidence found

On January 25th, 2013, Anderson Engineering of Minnesota located the 6 inch concrete square with the top broke off.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald



MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

6 INCH CONCRETE SQUARE

Northing (Y) 452576.12  
Easting (X) 654983.09

Base Station - 22 182W

Northing (Y) 408053.25  
Easting (X) 679287.00

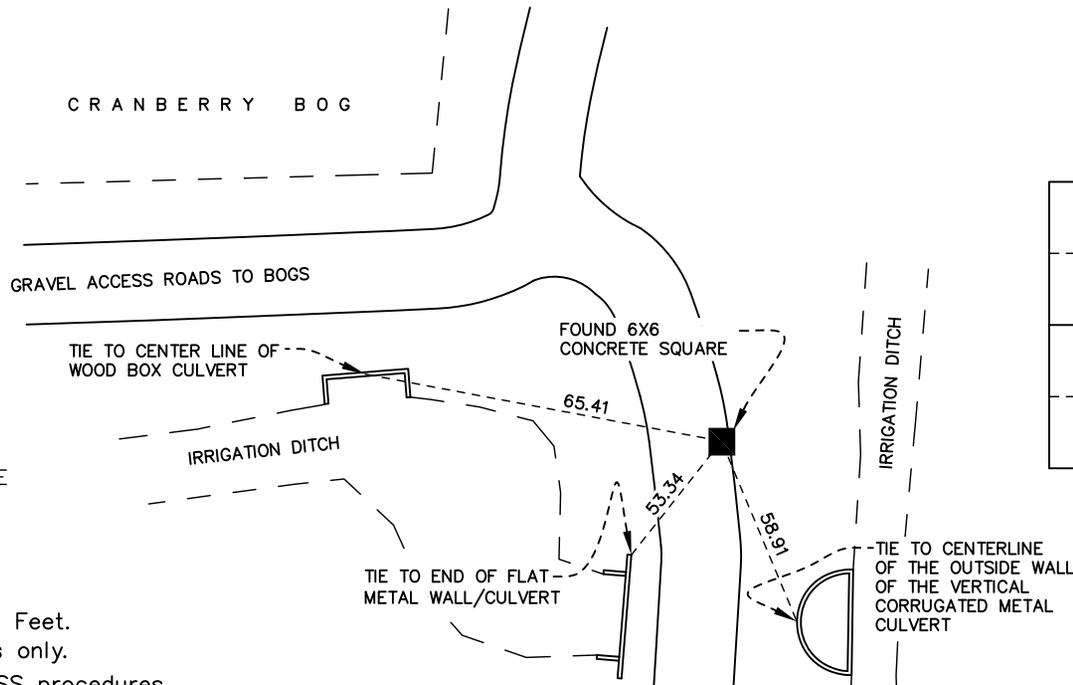

■ = LOCATION CORNER  
Corner I.D. S 1/4 2  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER

## History of corner established since Original Government Survey

The 1940's McCoy boundary notes show a corner at this location. After numerous unsuccessful attempts to locate the corner, William Jung set a 1 3/8" round iron bar at a computed location that best fits the McCoy boundary survey and the original government survey.

No. 21903100000

## Description of evidence found

On January 9th, 2013, Anderson Engineering of Minnesota located the 1 3/8" bar flush with the ground.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

1 3/8 INCH IRON BAR  
Northing (Y) 447296.00  
Easting (X) 652303.98

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

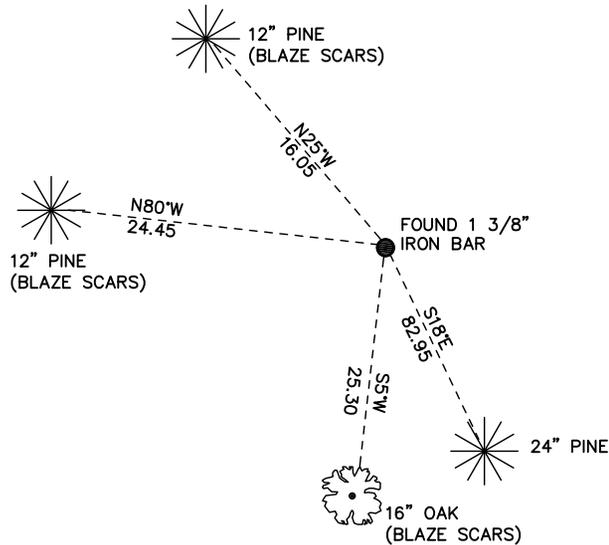

● = LOCATION CORNER  
Corner I.D. SE COR 10  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

**CERTIFICATE**

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

**CERTIFIED LAND CORNER**

**History of corner established since Original Government Survey**

In November of 1983 William Jung set a Harrison monument at the corner by single proportionate measurement between the northeast and southeast corners of Section 12.

No. 21903102000

**Description of evidence found**

On August 7th, 2012, Anderson Engineering of Minnesota located the Harrison monument on the shoulder of the road 1 foot below grade. The top of the Harrison monument was missing.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 449964.72  
Easting (X) 652320.75

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

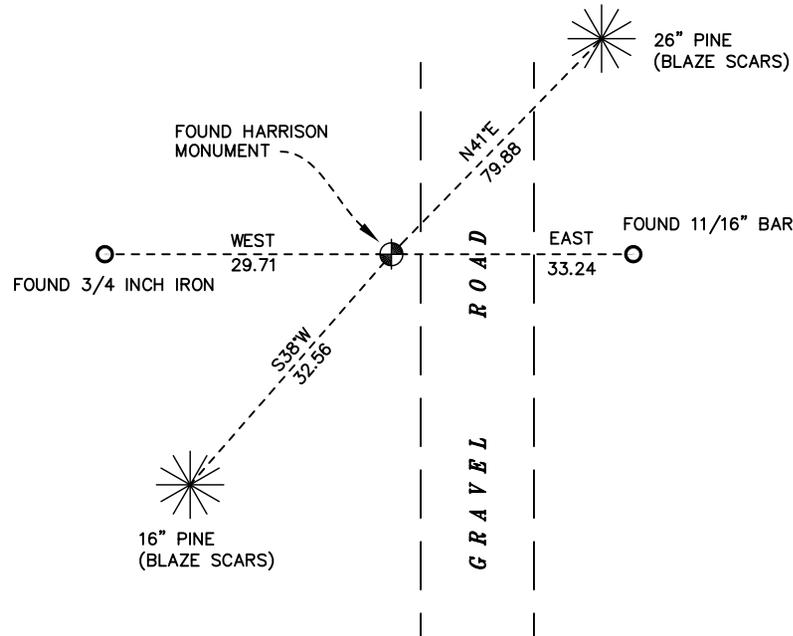

⊙ = LOCATION CORNER  
Corner I.D. E 1/4 10  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER

## History of corner established since Original Government Survey

Fred A. Holden was at this corner in October of 1901. The 1940's McCoy boundary notes show a corner at this location. William Jung found Holden's old bearing tree but did not find the stone. Jung believes the stone was torn out by equipment in the area. Jung found one of Holden's bearing trees with the number "18". Jung re-established the position from this evidence with a Harrison monument.

## Description of evidence found

On August 7th, 2012, Anderson Engineering of Minnesota located the Harrison monument 2 inches above grade and 1.4 feet northeast of a 4 inch square post with a sign.

No. \_\_\_\_\_  
**21903120000**

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 447212.94  
Easting (X) 662854.88

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

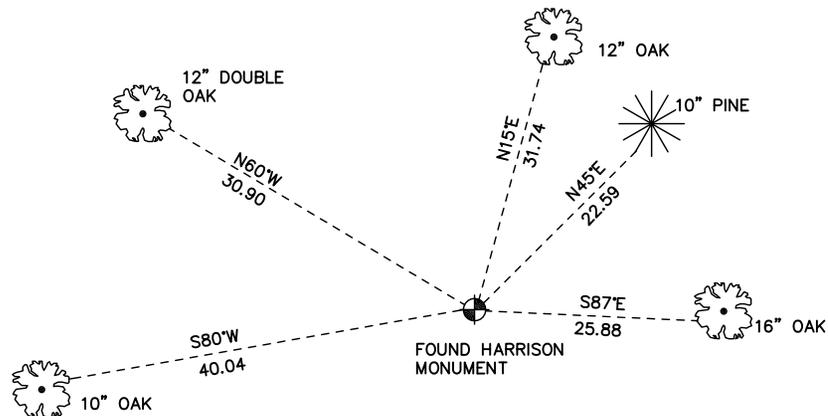

☉ = LOCATION CORNER  
Corner I.D. SE 12  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER

## History of corner established since Original Government Survey

In June of 1980 Harley Sime set a Harrison monument by projecting the bearing between the existing northeast corner of Section 21 and the northwest corner of the NE1/4-NE1/4 of Section 21 west at McCoy's record distance.

## Description of evidence found

On January 10th, 2013, Anderson Engineering of Minnesota located the Harrison monument with the top missing 1 foot north of a witness post with survey marker sign.

No. 21903160020

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald



MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 441998.33  
Easting (X) 644442.42

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00



All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

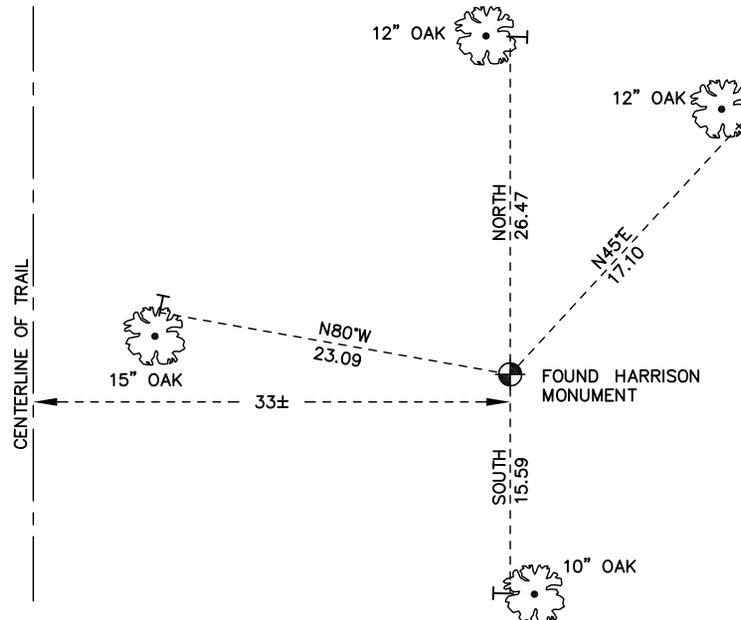

● = LOCATION CORNER  
Corner I.D. S 1/4 16  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER

## History of corner established since Original Government Survey

In June of 1980 Harley Sime set a Harrison monument at this corner by intersecting a line made parallel with the whole west section line and the whole south section line of Section 20.

## Description of evidence found

On January 10th, 2013, Anderson Engineering of Minnesota located the Harrison monument flush with the ground and 1 foot north of a witness post with survey marker sign. Pits were found to the north, south, east, and west.

No. 21903170000

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 441901.29  
Easting (X) 641674.84

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

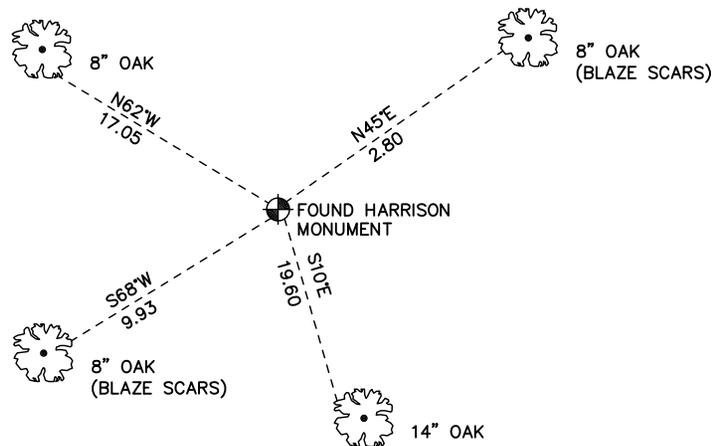

● = LOCATION CORNER  
Corner I.D. SE 17  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER

## History of corner established since Original Government Survey

Keach had set a stone here in April of 1904. On September 3, 1981, Lawrence Feddersen replaced the stone with a Harrison monument, placing the old stone monument just south of the Harrison.

No. 21903200000

## Description of evidence found

On August 8th, 2012, Anderson Engineering of Minnesota located the Harrison monument on the north edge of a gravel road. The old sandstone monument was found just to the south of the Harrison.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald



MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 436695.83  
Easting (X) 641691.58

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00



All distances are shown in U.S. Survey Feet.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

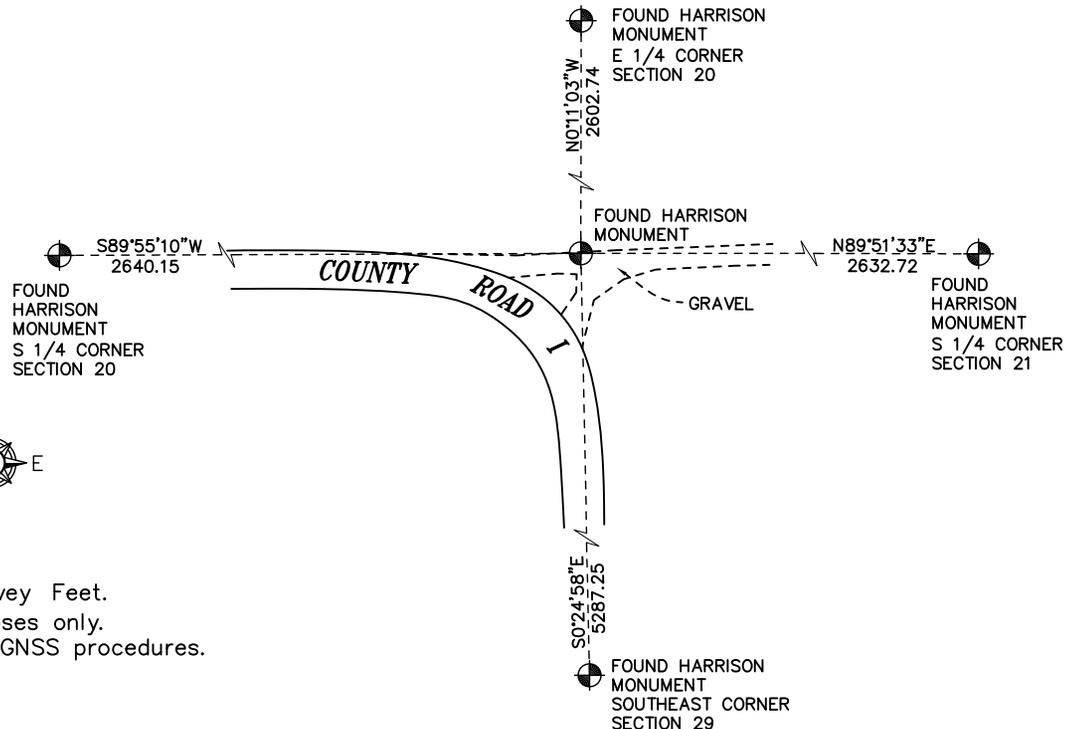

⊙ = LOCATION CORNER  
Corner I.D. SE 20  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013

Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER

### History of corner established since Original Government Survey

No recorded history of this corner was found.

### Description of evidence found

On May 22nd, 2013, Anderson Engineering of Minnesota set a Harrison monument midway online between the northeast corner and southeast corner of Section 20.

No. 21903202000

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 439298.56  
Easting (X) 641683.21

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

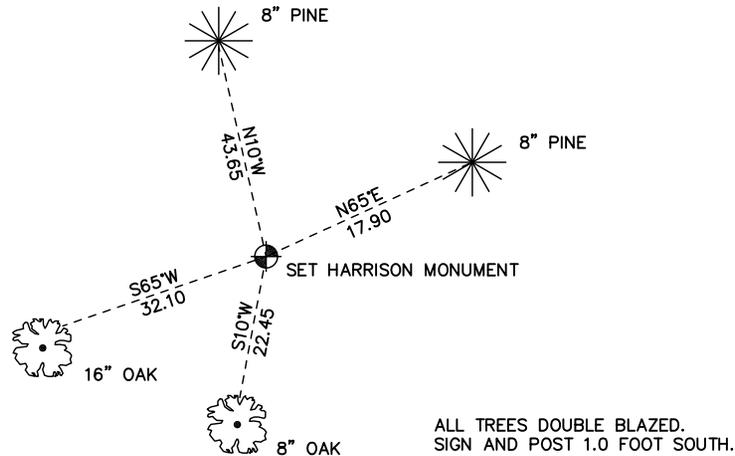

● = LOCATION CORNER  
Corner I.D. E 1/4 20  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER

## History of corner established since Original Government Survey

On December 6th, 1983, William C. Jung found no record since the original government survey. Jung set a Harrison monument by single proportionate measurement using the existing southwest and southeast section corners.

No. \_\_\_\_\_  
**21903210020**

## Description of evidence found

On August 8th, 2012, Anderson Engineering of Minnesota located the Harrison monument flush with the ground.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:



Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 436702.30  
Easting (X) 644324.30

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

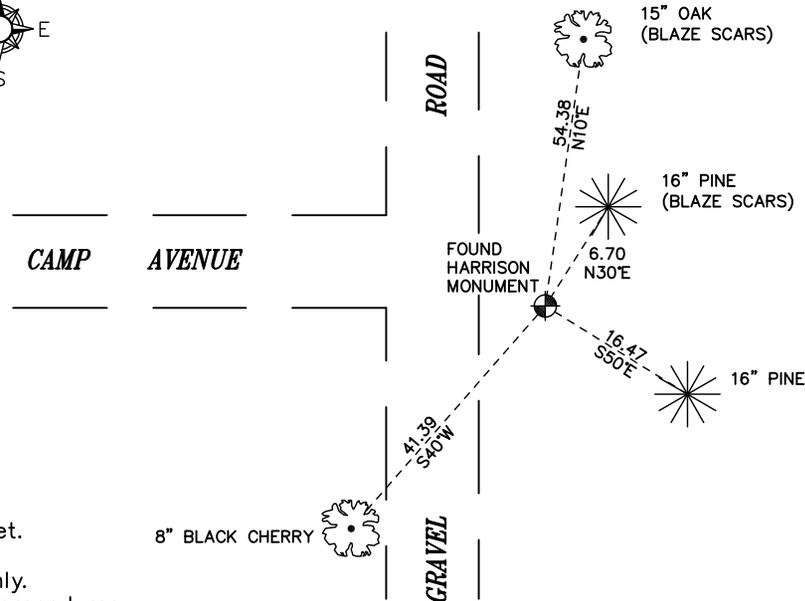

⊙ = LOCATION CORNER  
Corner I.D. S 1/4 21  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER

## History of corner established since Original Government Survey

Keach set a stone here in 1904. Lawrence Feddersen found the sand stone and replaced it with a Harrison monument in 1981.

No. 21903290000

## Description of evidence found

On February 27th, 2013, Anderson Engineering of Minnesota located the Harrison monument flush with the ground and 0.5 feet west of a railroad tie corner post.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 431408.72  
Easting (X) 641729.97

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

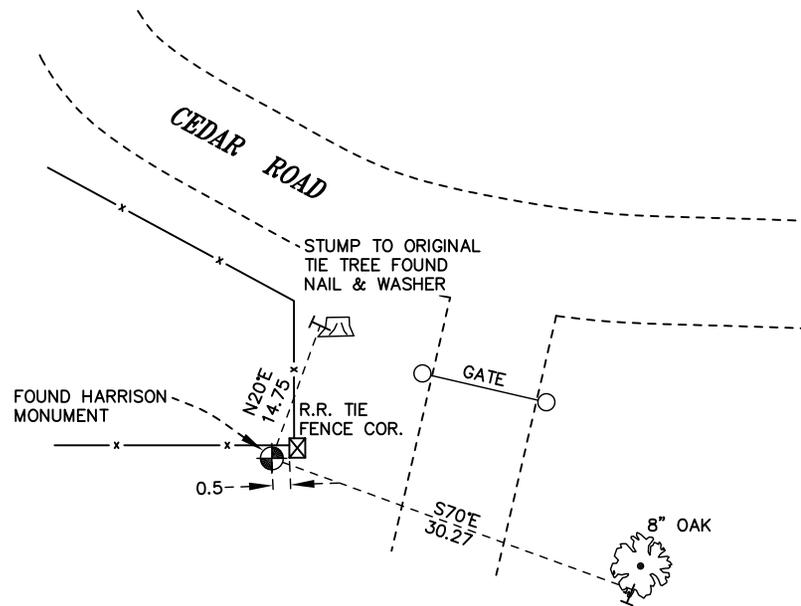

⊙ = LOCATION CORNER  
Corner I.D. SE 29  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

**CERTIFICATE**

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

**CERTIFIED LAND CORNER**

**History of corner established since Original Government Survey**

Keach set a stake at this corner in 1904. William Jung set a Harrison monument by using single proportion measurements in 1981.

No. 21903330020

**Description of evidence found**

On February 27th, 2013, Anderson Engineering of Minnesota located the Harrison monument flush with the ground and 1.15 feet north of steel post.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

HARRISON MONUMENT  
Northing (Y) 426104.96  
Easting (X) 644370.50

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

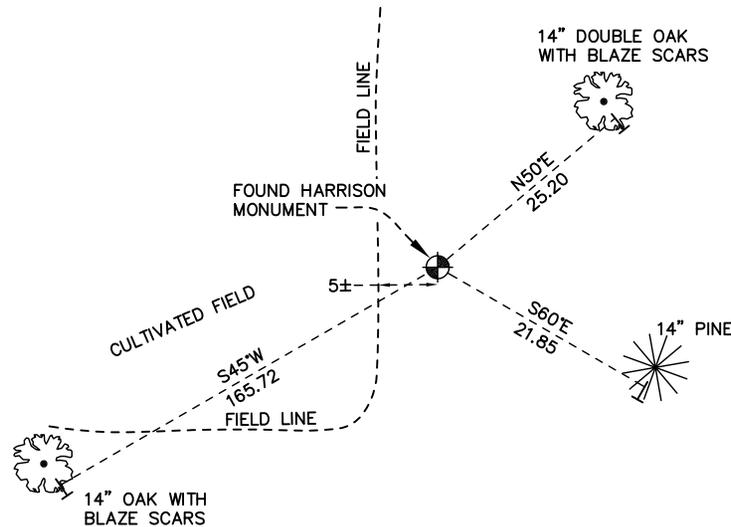

● = LOCATION CORNER  
Corner I.D. S 1/4 33  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER

No. 2200334000

## History of corner established since Original Government Survey

In 1940 Keith H. Bennett remonumented this corner with a angle iron stake while completing a section corner restoration and remonumentation project for Jackson County which covered all of this township and several others. In January of 1978 Ray Hurlburt replaced Bennett's angle iron with a 30 inch Berntsen cast aluminum monument and refurbished the 2 1/2 inch brass witness monument 33 feet to the west with a sign and post 1 foot west.

## Description of evidence found

On January 25th, 2013, Anderson Engineering of Minnesota located the Berntsen monument in the center of Apollo Road down 0.2 feet.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald



MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

BERNTSEN MONUMENT  
Northing (Y) 458051.51  
Easting (X) 652361.70

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00



FOUND 2 1/2 INCH  
BRASS CAP AS WITNESS  
WITH SIGN AND POST  
1.0 FOOT WEST

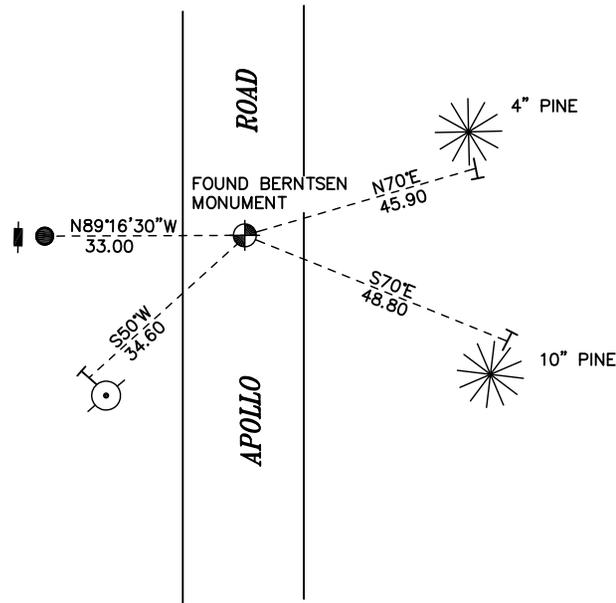

⊙ = LOCATION CORNER  
Corner I.D. NE 3  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.

# CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

# CERTIFIED LAND CORNER

## History of corner established since Original Government Survey

In 1939 Keith Bennett set an iron pipe at this corner where there had been a stone from a previous survey. Bennett set a stone by the pipe as a witness corner. In June 1953 O. Bergman ran a random line south from this corner and set a corner at the NE E 1/16 of Section 2. William Jung found the pipe and stone. Jung accepted the pipe as the corner. The pipe was found with a 2 3/4 inch brass cap up 15 inches.

## Description of evidence found

On February 22nd, 2013, Anderson Engineering of Minnesota located a 2 1/4 inch pipe with a 2 3/4 inch brass cap 9 inches above grade. Pits were found to the east and south. Filled in pits were found to the north and west. A stone was found 0.5 feet southeast of the monument. A witness post with an unmarked sign was found 0.75 feet northeast of the pipe.

No. 22003350000

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:




Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald

MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

2 1/4 INCH PIPE  
Northing (Y) 458041.10  
Easting (X) 657654.04

Base Station - 22 182W  
Northing (Y) 408053.25  
Easting (X) 679287.00

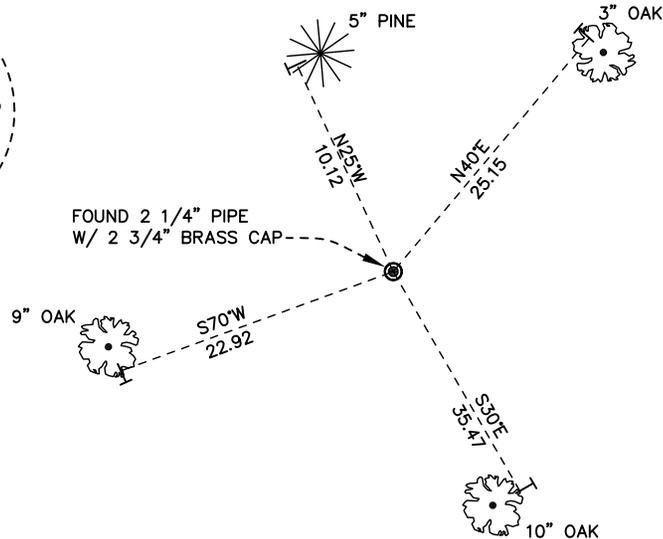

⊙ = LOCATION CORNER  
Corner I.D. NE 2  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Ties are to 60D nails set in trees.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.