

66

**U.S. PUBLIC LAND CORNER
MAINTENANCE**

**Corner ID : N1/4 Sec.22, T17N-R1E
41701150020**

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u>
May 23, 2018	Zachariah P.Dechant Gary L. Dechant	Existing 4' Section of Railroad Rail set by Fred Holden in March of 1902 at 3-way fence corner. Set 1 1/4"x6' round iron bar on south side as anchor and concrete. Set sign 2' south.

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" round iron bar, down 10", 5' north of fence	N76E	26.86'
2) Set 3/4"x24" round iron bar, down 6", 6' south of fence	S72E	26.32'
3) Set 3/4"x24" round iron bar, down 6", 4' east of 12" Black Walnut	N80W	24.27'
4) Set 3/4"x24" round iron bar, down 6", 4' SE of 10" Black Cherry	N36W	45.71'



I, Harley A. Sime, do hereby certify that on the 03rd day of March 1980, I found (evidence) ~~no evidence~~ of the North 1/4 corner of Sec. 22, T 17 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of corner establishment since Original Government Survey
Fred Holden shows a R.R. rail here in March of 1902.

Description of corner evidence found:

Found R.R. rail at a good 3-way fence corner and took ties.

Dated this 17th day of March 1980.

Harley A. Sime R.L.S. 335

County Surveyor
Title

**See Reverse Side
For Maintenance**

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Dechant
Tormoen
Dade

**Approved: HARLEY A. SIME
MONROE CO. SURVEYOR**

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____
Corner	_____
Control Sta. Name	_____



WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

(ALL TREES W/N&C'S AND DBL. BLAZED)



EX. R.R. RAIL,
UP 4"±

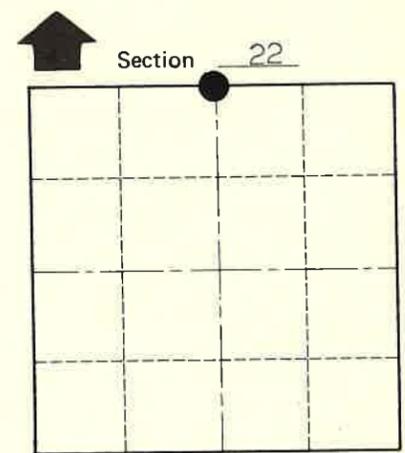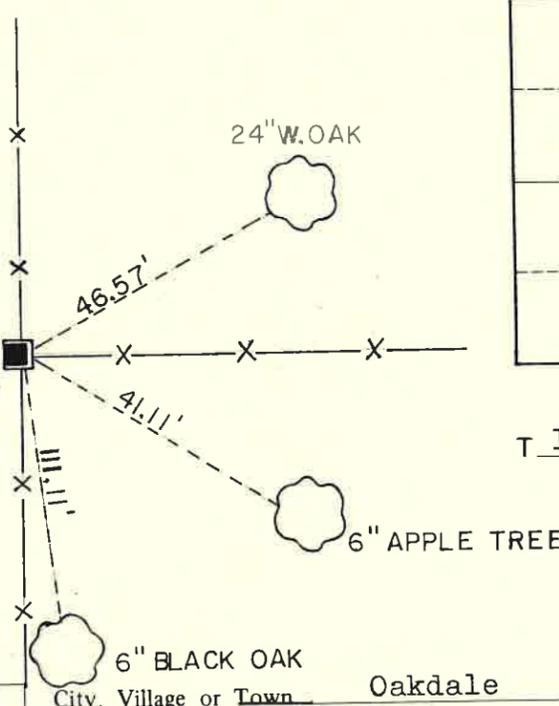

T 17 N R 1 E
WISCONSIN

City, Village or Town Oakdale

County of Monroe