65

U.S. PUBLIC LAND CORNER MAINTENANCE

Corner ID : SE Sec. 15, T17N-R1W

21701150000

DATE	CREW	MONUMENT TYPE ----------
July 20, 2018	Zachariah P.Dechant Gary L. Dechant	Existing 1" iron pipe over Harrison 6' west of center line Hickory Road On line with fence to east.

References:	Bearing	Distance
1) Set 3/4"x24" round iron bar, down 12" in field	N65E	56.51'
2) Set 3/4"x24" round iron bar, down 8" on road shoulder, 18' east of road	S73E	26.61'
3) Set 1¼"x24" round iron bar, down 6". 5' NE of oak stump (1974 BT)	S65W	47.90'
4) Set 1¼"x24" round iron bar, down 6", 4' SE of 16" Maple (1974 BT)	N73W	30.17'

Corner and reference markers set on straight lines.

WISCONSIN
GARY L. DECHANT
S-1744
CAMP DOUGLAS, WI
LAND SURVEYOR

July 23, 2018

CERTIFICATE

I, Harley A. Sime, do hereby certify that on the 17th day of September 19 74, I found (evidence) ~~(no evidence)~~ of the SE corner of Section 15, T 17 N, R 1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 6th day of Feb. 1978.

County Surveyor
Title

Approved: HARLEY A. SIME
MONROE CO. SURVEYOR

CERTIFIED LAND CORNER

No. 65

History of original corner establishment:

See Reverse Side
For Maintenance

Description of corner evidence found:

Intersected fence lines. Set Harrison Monument 6" below surface of gravel road. The corner falls in the centerline of the road.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

SET HARRISON.

Witnesses to corner location:

D. Marten

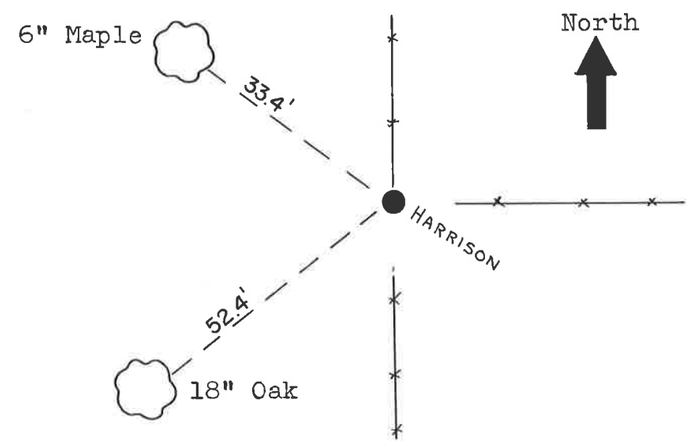

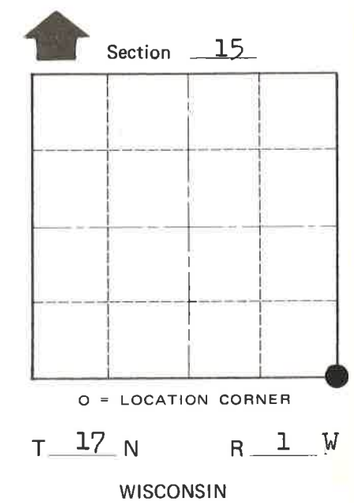

SURVEY CONTROL ORDER

Horizontal	
Vertical	

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Tomah

County of Monroe

COUNTY SURVEYOR FORM NO. 1