10

U.S. PUBLIC LAND CORNER MAINTENANCE

Corner ID : N1/4 Sec.5, T16N-R1W

21701320020

DATE	CREW	MONUMENT TYPE ----------
November 28, 2018	Zachariah P. Dechant Gary L. Dechant	Existing stone (+) at remains of fence corner. Existing & set bars around stone for detection and stability. Sign 1½ NE. Pits north & south have been filled. Dug new pit 7' NW.

References:	Bearing	Distance
1) Set 3/4"x24" round iron bar, down 12" in field	N50E	17.24'
2) Set 3/4"x24"round iron bar, down 12" in field	S40E	19.00'
3) Set 3/4"x24" round iron bar, down 4", 6' NE of 30" White Oak	S50W	15.00'
4) Set 3/4"x24" round iron bar, down 10", in cleared woods	N10W	13.92'

Gary L. Dechant

WISCONSIN
GARY L. DECHANT
S-1744
DOUGLAS, WI
LAND SURVEYOR

December 7, 2018

COUNTY SURVEYOR FORM NO. 1

CERTIFICATE

I, Harley A. Sime, do hereby certify that on the twenty-ninth day of April 1981, I found (evidence) ~~(no evidence)~~ of the North 1/4 corner of Section 5, T 16 N, R 1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 14th day of August 1981.

Harley A. Sime

Monroe County Surveyor
Title

Approved: HARLEY A. SIME
MONROE CO. SURVEYOR

CERTIFIED LAND CORNER

No. 10

21701320020

History of corner establishment since Original Government Survey

FRED HOLDEN WAS HERE IN NOV. OF 1905

Description of corner evidence found:

Accepted three-way fence corner as best available evidence.

See Reverse Side For Maintenance

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Bryan H. Meyer - Crew Chief

Gary L. Dechant

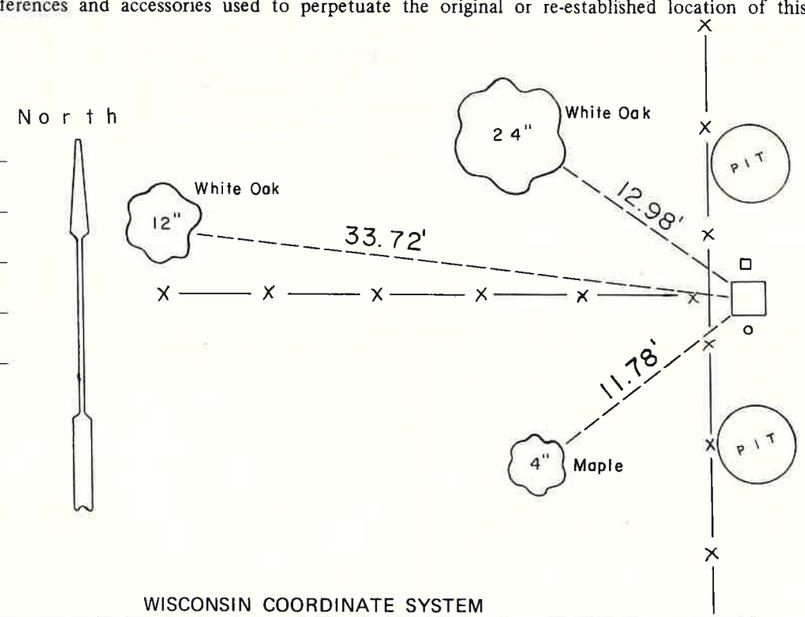

Set sandstone with cross on top. Stone is .7'x.9'x2.0'. It is scribed MEYER, DECHANT on South side and 1/4, 4-81 on North side. Iron bars are set on East and West sides of stone. Set 2"x2" wood post on North side and buried champaign bottle containing note on South side. Stone is up 8". Oaks are double blazed with railroad spikes set in lower blaze, and scibed "M" in upper blaze. Maple is double blazed with a nail set in the lower blaze.

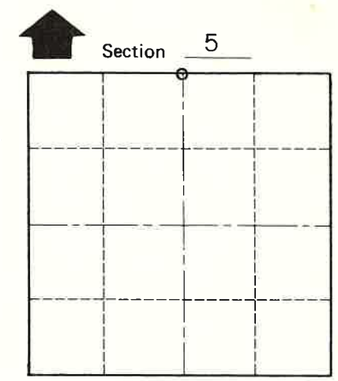

O = LOCATION CORNER

T 16 N R 1 W

WISCONSIN

SURVEY CONTROL ORDER

Horizontal	
Vertical	

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town of Wilton

County of Monroe