

# 8

**U.S. PUBLIC LAND CORNER  
MAINTENANCE**

**Corner ID : N1/4 Sec. 4, T16N-R1W  
21701330020**

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE -----</u>
November 23, 2018	Zachariah P. Dechant Gary L. Dechant	Found Harrison intact, flush w/ground in east-west fence. Set sign 1' east.

<u>References:</u>	<u>Bearing</u>	<u>Distance</u>
1) Existing 3/4" round iron bar, lowered 10"	N5E	5.73' (5.77)'
2) Set 3/4"x 24" round iron bar, down 10" in field	N40E	17.46'
3) Set 3/4"x 24" round iron bar, down 10" in field	S46E	19.12'
4) Set 3/4"x 24" round iron bar, down 10" in field	S30W	16.73'

*Gary L. Dechant*  
  
*November 23, 2018*

I, Bryan H. Meyer, do hereby certify that on the 2nd day of July 1985, I found (evidence) ~~an evidence~~ of the North 1/4 corner of Section 4, T 16 N, R 1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 3rd day of Feb. 1986.

Bryan H. Meyer

Deputy County Surveyor  
Title

History of corner establishment since Original Government Survey

W. F. Schroeder, deputy county surveyor, was here in December of 1903 and calls for a stone at the corner. Gary Sime was here in July of 1977 and looked for Schroeder's stone but could not find it. He set a railroad spike at a three-way fence corner (N-E-W).

Description of corner evidence found:

I found Sime's railroad spike between 2 brace posts for an East-West fence. The fence to the North has since been removed. I made an extensive search for Schroeder's stone but I was unable to find it. I accepted Sime's railroad spike as the corner.



See Reverse Side For Maintenance

COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Crew: Meyer, Wilhite  
Date: July 2, 1985 - 2:30 P.M.  
Weather: P. Cloudy, 80°+.



Witnesses to corner location:

Bryan H. Meyer

Dallas Wilhite

The two bearing trees shown are double blazed; the distance shown to each tree is to a nail set in a hack in the side of each tree.

o = Set 3/4" x 24" iron bar

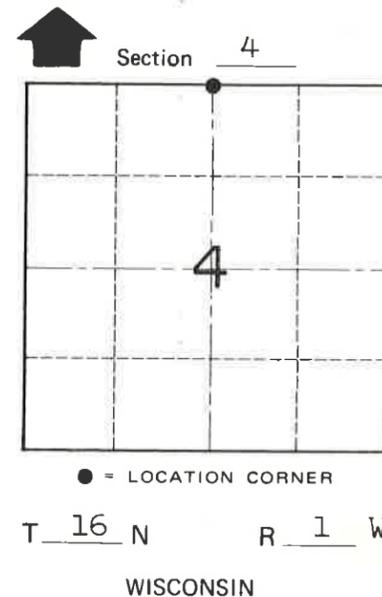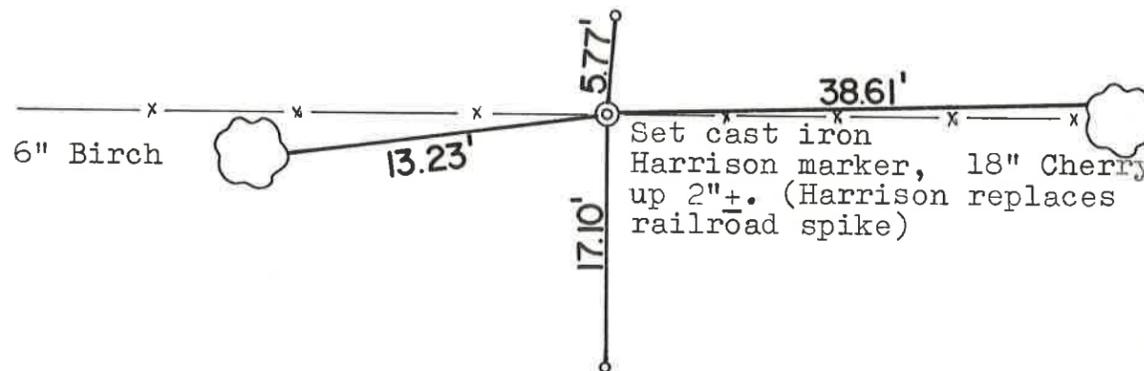

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town of Wilton

County of Monroe