


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

SECTION 34, T15N, R2W
 MONROE/VERNON COUNTY, WISCONSIN

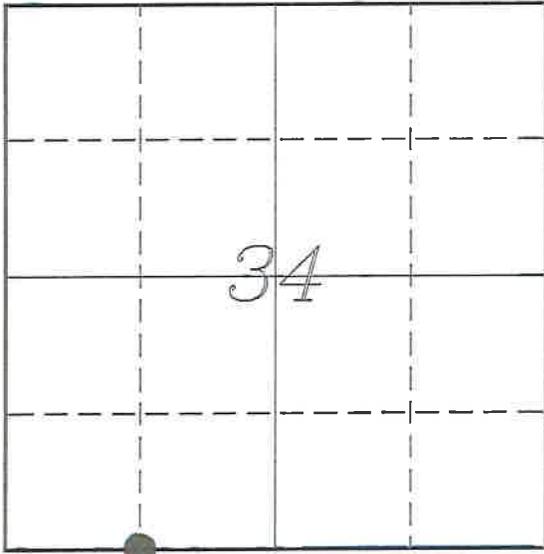

LOCATION OF LANDMARK

MONROE COUNTY COORDINATE SYSTEM	
Northing	300102.841
Easting	680161.591
VERNON COUNTY COORDINATE SYSTEM	
Northing	211028.861
Easting	776612.856
Datum	NAD 1983 (2011)
TYPE OF LANDMARK:	
Set Lunde Monument 4" Brass Capped Iron Pipe	
BEARINGS ARE REFERENCED TO:	
Vernon County Coordinates (Survey Grade)	

Witnesses: Laurence E Johns III
 Doug Avoles

Adjust Bearings +00°05'51"
 To Convert to Monroe County

Date: 12 June 2019

Describe or show any material discrepancy between the location of the restored corner and that of the corner previously restored or re-established.

This corner was not previously established.

Ralph Van Dorpe, surveyor for the US Army Corps of Engineers was along this line, during a survey in February 1966. He did not establish this corner during that survey.

Gary Dechant shows this corner on a survey in Section 34, conducted in December 1994. He does not show a monument set nor does he show how the corner was determined.

Describe any record evidence, monument evidence, testimonial evidence or any other material evidence you considered and whether the monument was found or restored through acceptance of an obliterated evidence location.


This corner was made part of the County Line between Monroe & Vernon County on June 26, 1939. It was not surveyed at that time.

No previous survey of the new county line has been completed.

I established this corner at the mid-point between the SW Corner & S 1/4 Corner of Section 34. I falls in an area of wet pasture land. I set a Lunde Monument about 6" below the surface.


RECORD OF DURABLE WITNESS MONUMENTS

NO	DESCRIPTION	BEARING	DISTANCE
1	Set 3/4" x 18" Iron Rod In Fence - 6' West of ROW Post	N 19°39'27" W	144.97'
2	Set 3/4" x 18" Iron Rod In Fence	N 34°14'14" E	78.58'
3	Set 3/4" x 18" Iron Rod West Side of East Gate Post	N 85°16'29" E	113.89'
4	Set 3/4" x 18" Iron Rod In Fence	S 72°31'04" E	197.00'

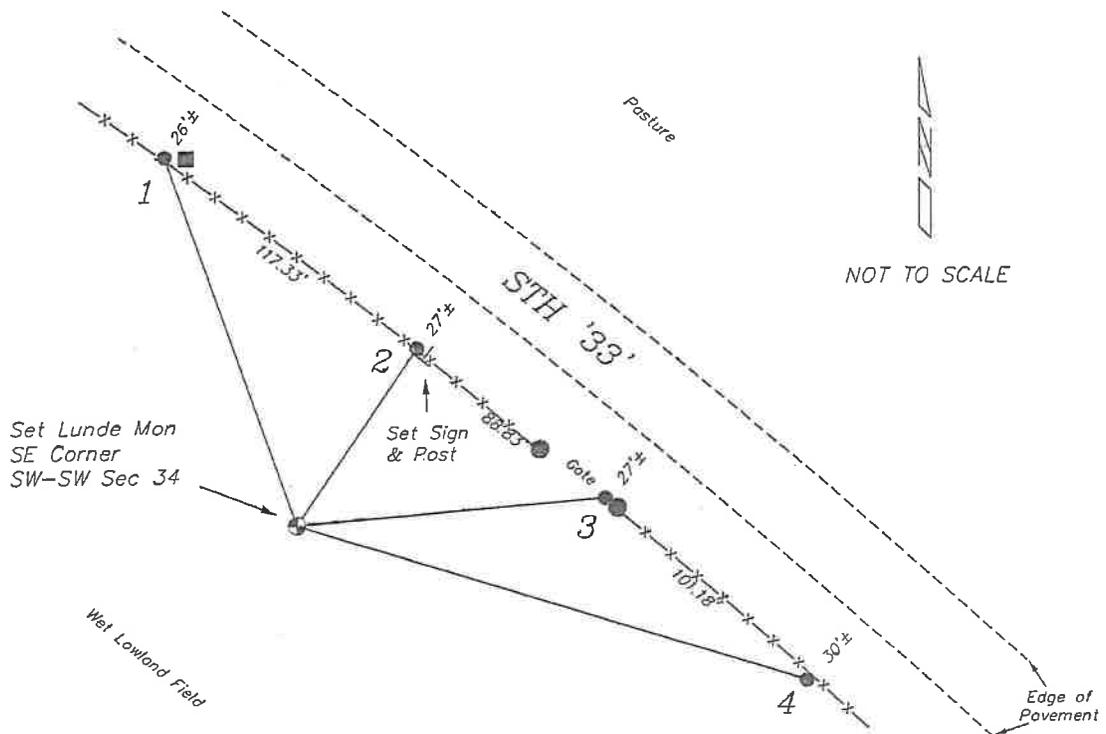

PLAN VIEW DRAWING OF REFERENCE TIES

Map Showing Distance And Direction To Other Public Land Survey
Corners Used For Re-Establishing The Corner

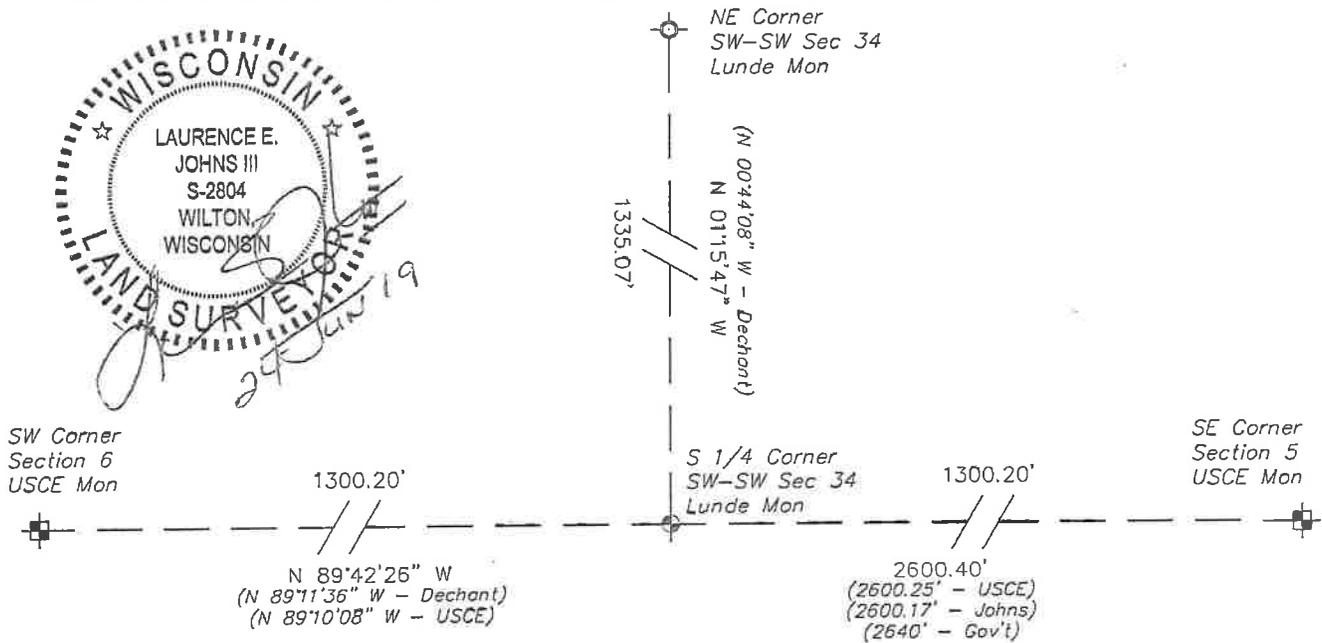

I, Laurence E Johns III PLS 2804, Professional Land Surveyor, hereby certify that the corner location shown on this record was determined by me or under my direction and control, and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.